

Engineered Solutions

- Exhaust Systems & Accessories
- SCR & DPF Aftertreatment
- Yacht Cranes, Davits & Passerelles
- Hatches, Doors, Portlights & Windows
- Prop-Shaft Systems
- Noise & Vibration Control
- Environmental Protection
- Halyard Network
- Service Support



















halyard.eu.com

technical@halyard.eu.com

Pleasure Craft

Commercial

Superyacht

Contents

Exhaust Systems and Accessories	5
Halyard UK Manufacturing Facilities	6
Design & Manufacturing	7
Exhaust System Examples	
Risers and Spray Heads	
Replacement Exhaust Injection Elbows & Spray Rings	
Example System - Standard In-line Silencer with Discharge Above Waterline	
Example System - Dual Chamber Silencer with Discharge Above Waterline	
Example System - Single Chamber Lift Silencer with Discharge Above Waterline	
Example System - Standard In-line Lift Silencer with Discharge Above Waterline Example System - Single Chamber Lift Silencer with Bypass &	14
Underwater Discharge	15
Example System - Dry Silencer to Spray Ring with Bypass &	10
Underwater Discharge	15
Example System - Single Chamber Lift Silencer & Separator with	
Discharge Above Waterline	16
Example System - Combined Silencer & Separator with	
Gas Discharge up the Stack	16
Water-Cooled GRP Lift Silencers - Top In / Top Out - Standard Products	17
Water-Cooled GRP Lift Silencers - Side In / Top Out - Standard Products	17
Water-Cooled GRP Lift Silencers - Side Angle In / Top Out - Standard Products	
Water-Cooled GRP Lift Silencers - End In / End Out - Standard Products	
Water-Cooled GRP In-line Round Body Silencers - Standard Products	
Water-Cooled GRP In-line Oval Body Silencers - Standard Products	
Water Cooled GRP Dual Chamber Silencers - Standard Products	
Water-Cooled GRP Combined Silencer / Separators - Standard ProductsGRP Low Profile Water Separator - Standard Products	
GRP General Water Separator - Standard Products	
MS4000 Series Moulded Water Separator - Standard Products	
MS5000 Series Moulded Water Separator - Standard Products	
MS7000 Series Moulded Water Separator - Standard Products	
GRP Exhaust Tube	. 23
GRP Exhaust Tube & Connectors	24
Dry Silencers	. 25
Reactive Exhaust Gas Dry Silencer	. 25
Absorptive Exhaust Gas Dry Silencer	
Dry Silencers - M31 Reactive Critical Grade Exhaust Silencers	
Dry Silencers - M51 Critical Grade Exhaust Silencers	
Dry Silencers - FP Straight Through Absorption Silencers	
SCR and DPF Aftertreatment Systems	
Exhaust Alert System	
Exhaust Alert - Options	
Thermal Insulation Jackets	
Hot Lag	
Flexible Exhaust Bends - Standard Products	
Wire Reinforced Standard Range Exhaust Hose - Standard Products	. 34
Wire Reinforced 'HalFlex' Ultra Flexible Exhaust Hose - Standard Products	. 34
Wire Reinforced 'HalFlex-HT' High Temperature Hose - Standard Products	
Silicone Exhaust Hose - Standard Products	
Wire Reinforced Silicone Exhaust Hose - Standard Products	
Silicone Flexible Bellows - Standard Products	
Bronze Siphon Breakers	
Separator Non-Return Valves	
Stainless Steel Hose Clamps	
3 TOL Stalliess Steel Tillough-Hull Exhaust Outlets	. 55
Fabricated Manifolds & Connectors	.40
316L Stainless Steel Deck Drain Manifolds	. 40
316L Stainless Steel Branch Connectors	
316L Stainless Steel Y Connectors	41
316L Stainless Steel In-line Reducers	41

Antivibration Mounts, Flanged Bellows & Bulkhead Penetrations	42
Hanging/Standing Fixed Point and Stabiliser Mounts	
Fixed Point Mounts	
Stabiliser Mounts	
MP2 Series Compression Mounts	
Heat Reducing Bulkhead Penetration	
Bow Thruster Tube	49
GRP Tube For Bow Thrusters	
Freeman Marine Cast Hatches	50
Approvals & Certificates - ISO 9001:2015	51
Service, Value and Experience	
Quality and Capability	
Knife Edge or Compression Sealing	53
Oval Cast Hatches	54
Round Cast Hatches	55
Rectangular/Square Cast Hatches	57
Handle Options	59
Hinge Options	60
Hold Open Options	61
Miscellaneous Options	61
Cast Hatch Loading Limits	62
Watertight Hatches	63
Premium Duty - 3140 Series	63
Premium Duty - 3440 Series	63
Commercial Heavy Duty - 3211 Series	63
Commercial Heavy Duty - 3212 Series	63
Premium Military Closures	64
Doors	64
Scuttles	64
Hatches	64
Military & Commercial Cast Aluminium Closures	65
Ventilation Hatches	65
Console Door	65
Lens Hatch	
Interior Access Hatch	65
Civil Engineering Hatches	65
Flush Shore Power Hatch	65
Freeman Marine Cast Hatches & Watertight Doors	66
Approvals & Certificates	67
Standard Duty Weathertight	68
1111 Series	68
1511 Series	
1611 Series	68
Heavy Duty Weathertight	60
Heavy Duty Weathertight	
1120 Series	
1620 Series	69

Standard Duty Sliding Weathertight	70
1710 Series	70
1716 Series	
Premium Duty Watertight	71
1140 Series	
1440 Series	
1770 00100	
Quick Ship Doors	72
250 Series Weathertight doors	72
1212 Series Watertight doors	72
300X Series Sliding Doors	72
Premium Yacht & Commercial Vessel	73
Directbond Glass, Hinged/Sliding Doors & Hatches	73
Premium Quality Defence & Commercial/Workboat Doors & Hatches	73
World-class Superyacht Sliding & Hinged Doors	
Custom Made Doors, Hatches & Manholes	75
Watertight & Fire Rated Doors & Hatches	
Watertight Manholes	
Steelhead Marine High Performance Yacht Crar	
High Performance Yacht Lifting Equipment	
LW Series (Light Weight)	
WD Series	
E Series	
CT Series	
High Performance Yacht Crane Product Specifications	
Accessories - Crane Controllers	
LW Series 250 & 350	83
WD Series 600, 800 & 1000	83
E Series	84
ES Series	
CT Seies	
Mounting Configurations	85
Aquadrive Antivibration System	86
CVB 05.10 Aquadrive Moduline B10	
CVB 10.10 Aquadrive Moduline B10	
CVB 15.10 Aquadrive Moduline B10	
CVB 21.10 Aquadrive Moduline B10	
CVB 21.20 Aquadrive Moduline B20	
CVB 32.30 Aquadrive Moduline B30	
CVB 42.30 Aquadrive Moduline B30	
CVB 42.680 Aquadrive Heavy Duty HDL	
CVB 42.680 Aquadrive Heavy Duty HDL Flanged	
HDL 48.690 Aquadrive Heavy Duty - Flanged Option Available	
HDL 60.700 Aquadrive Heavy Duty - Flanged Option Available	92
HDL 60.700 Aquadrive Heavy Duty HT - High Tensile Steel	
HDL 60.780 Aquadrive Heavy Duty Flanged	
Aquadrive System Engine Mounts	94

70	0 1 0 10 1	0.5
70	Seatorque Shaft Systems	
70	STM3 Enclosed Bolt-on-Shaft System 'BOSS' - Typical Installation	
70	ST Series Tube Style System - Typical Installation	
	Seatorque 'BOSS' Standard Range Dimensions	
71	MX1 BOSS-Lite	
71	MX2 Duo-BOSS	99
71	Noise Insulation Materials and Accessories	100
.72	Noise Insulation Materials, Tapes and Accessories	101
72 72	Halyard Acoustic Enclosures	102
72	Custom Generator Enclosure	
1 Z	Custom denerator enclosure	102
73	Wave International Filtration Systems	103
73	Wavestream Micro Bilge Filter	104
73	Wavestream System 1 Bilge Filter	104
74	Wavestream System 2 Bilge Filter	104
	Wavestream System 3 Bilge Filter	104
75	Wavestream MiniBOSS IMO Bilge Filter System	105
76	Wavebrite Waste Water Filter System	
77	Wavebrite WBS Schematic	107
	Wavebrite WB2010 Schematic	107
78	Wavebrite WB300 Schematic	
79	Wavebrite Grease Trap	108
80	Flostream HiFlo Drinking Water Filters	109
80	Flostream Drinking Water Cartridge & Head	110
80	Flostream Dock Water Filter, Cartridge & Hose	110
80	Waveair Holding Tank Vent Filter	111
80	PROstream Watermaker Duo Cartridge	
81	Waveshine Inline Wash & Rinse System	
82	Waveshine Clear Cartridge Wash & Rinse System	
83	Waveshine Clear 300	
83	Waveshine Clear 1000	
84	Waveshine Clear 2000	113
84	Halvard Camilas Cumpart	44.4
85	Halyard Service Support	114
85	Halyard Network	115
.86	Distributors & Dealers	
87	Agents	
01	- 9	

The information published by Halyard indicates the general suitability of our products for the types of applications for which they are designed. We cannot accept design responsibility for any specific installation unless we have confirmed in writing that the overall installation design is correct following our approval of detailed drawings or our physical survey of the vessel or equipment in which it will be used.



Halyard has been recognised as a leading provider of technical equipment for marine engine rooms since 1979. Today our product range extends beyond exhaust systems, for which we are renowned, to include propeller shaft systems, cranes, hatches & doors, filtration systems, noise & vibration control equipment plus a range of other technical products.

Halyard originated as the UK distributor for **Aquadrive** - an antivibration shaft system that delivers the propeller thrust into the hull of the vessel rather than through the transmission and engine. Installing the Aquadrive dramatically reduces noise & vibration and is fully optimised with the engine being supported by softer engine mounts, reducing the transference of engine vibration to the vessels structure. Our pursuit of making boating more comfortable quickly added the supply of Water-cooled Exhaust Silencers, Tube & Connectors, Lift Silencers & Noise Insulation to our product portfolio reducing noise pollution & adding once again to onboard comfort.

As technical demands of our customers grew, we then added exhaust Risers, Spray Heads, Supports & Thermal Jackets as well as Hoses & Bellows so that we were able to provide a complete exhaust system. Along with this in-house **Design** capability was setup so that **Custom Parts** & systems could be provided. Working with a wider range of customers and vessel applications then led us to add **Dry Silencers** to our product range.

With an increasing product portfolio, we have attracted **Distributors** from all over Europe & further afield - we now have over 30 distributors, dealers & agents worldwide.

As regulations have tightened, we have worked with established industry partners to provide exhaust SCR & DPF aftertreatment solutions, along with products to tackle overboard discharges including Bilge Water & Grey Water.

Our growing reputation as a distributor of technical products has added **Seatorque** Shaft Systems, Freeman and Ucalsa Hatches & Doors, Steelhead Cranes to our distributed product line-up. We are delighted to be representing such prestigious products and are always careful to ensure that products we bring to market are aligned to our high technical and quality standards.

To ensure that we support our customers fully, we have also grown our **Service** Operation offering Maintenance, Repair & Overhaul Support, plus Installation, Sea Trial & Commissioning Services, & system Audits.


















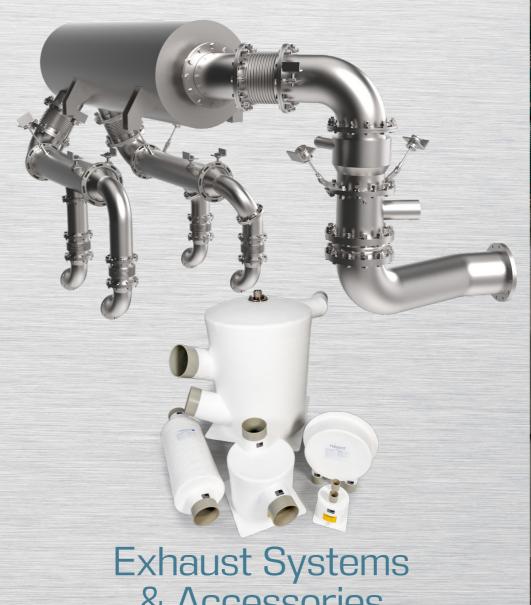

& Accessories


Watercooled or dry systems, standard or bespoke risers, spray heads, silencers, separators, DPF & SCR aftertreatment solutions

Standard product range:

- GRP silencers, separators, tube & connectors
- Moulded silencers & separators
- Rubber & silicone hose, bellows & connectors
- Through-Hull Exhaust Outlets
- Clamps, supports & accessories

Bespoke solutions:

- Designed to meet customers requirements
- Water cooled or dry silencers
- Solutions for all high & medium speed engines
- DPF & SCR solutions
- Lloyd's Type Approvals
- Underwater exhaust outlet design

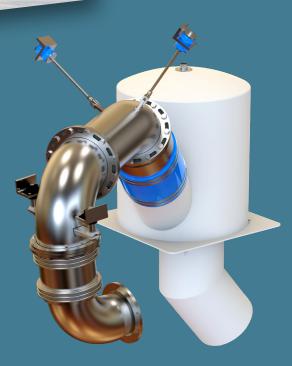

Halyard UK Manufacturing Facilities



Halyard products including stainless steel risers, water injection spray heads, exhaust transom outlets, supports, high temperature GRP silencers and separators, tube and connectors, marine exhaust hose, silicone hoses and bellows are designed and manufactured in-house at our UK manufacturing facilities.

As a result Halyard are uniquely placed to be able to design and manufacture market leading exhaust systems and components to meet your exact requirements.










The design and manufacturing stages include:

- System general arrangement 3D model
- Back pressures and safety considerations
- Silencer attenuation, and the way this fits to the overall objective
- Exhaust pipe runs
- Risers & spray heads
- Water injection spray ring design and positioning
- Water separation on generator systems
- Bypasses where below water outlets are involved
- Underwater exhaust outlet design

- Silencers, separators and connections
- Supports and mounts
- Bellows and hoses
- Thermal insulation
- SCR / DPF aftertreatment systems
- Customer approval
- Creation of manufacturing drawings
- Halyard in-house manufacture and procurement of all system components

Exhaust System Examples



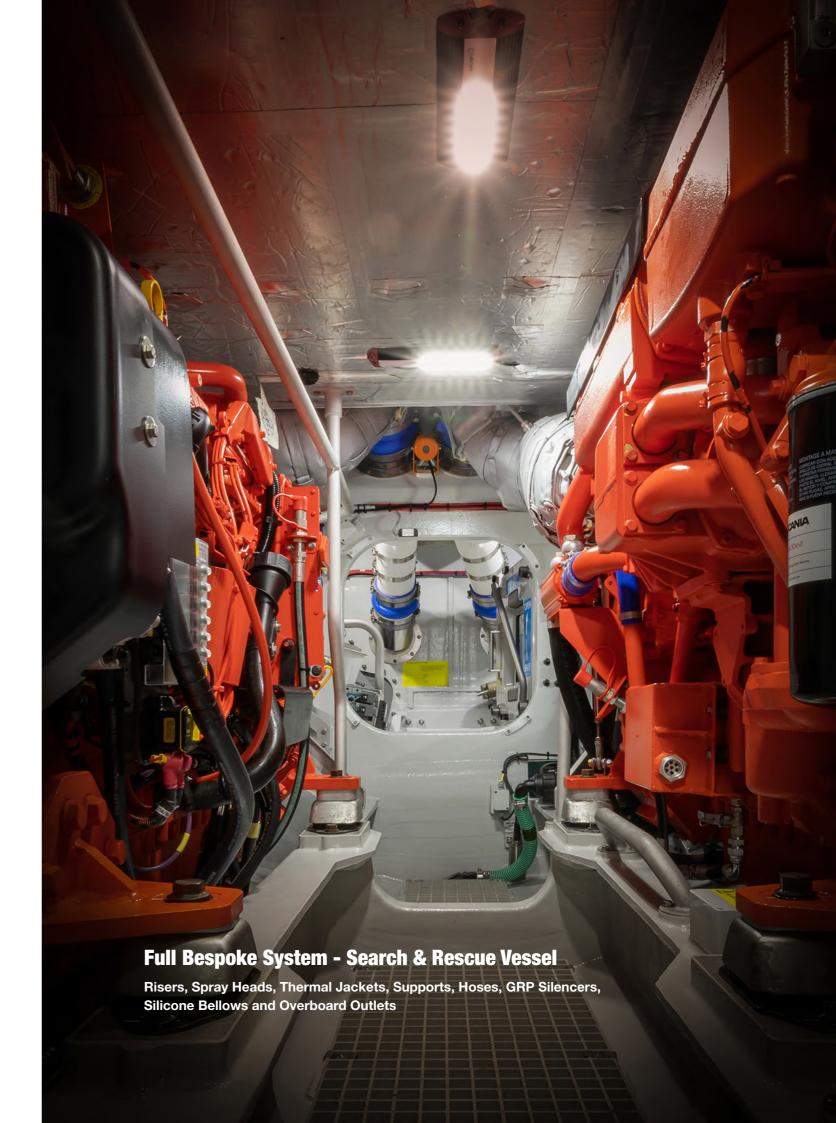





Halyard designs and manufactures exhaust risers and spray heads to suit the specific engine requirements and installation geometry. These are made from stainless steels or specalist corrosion resistant alloys depending on the engine duty cycle. Riser and spray head supports and thermal insulation are normally supplied as part of the system.


Replacement Exhaust Injection Elbows & Spray Rings

- Made in stainless steel or special corrosion resistant alloys
- Electro or mirror polished to customer requirements
- Thermal jackets and supports also available
- May require original unit as pattern






Example System - Standard In-line Silencer with Discharge Above Waterline

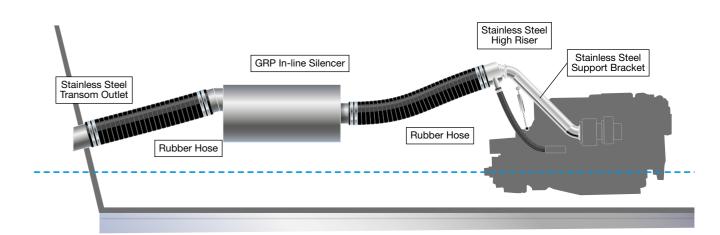


Example System - Dual Chamber Silencer with Discharge Above Waterline

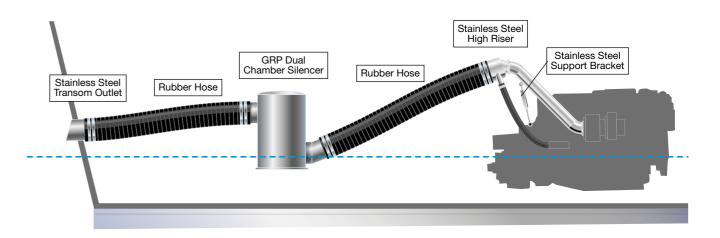


The information published by Halyard indicates the general suitability of our products for the types of applications for which they are designed. We cannot accept design responsibility for any specific installation unless we have confirmed in writing that the overall installation design is correct following our approval of detailed drawings or our physical survey of the vessel or equipment in which it will be used.

Example System - Single Chamber Lift Silencer with Discharge Above Waterline

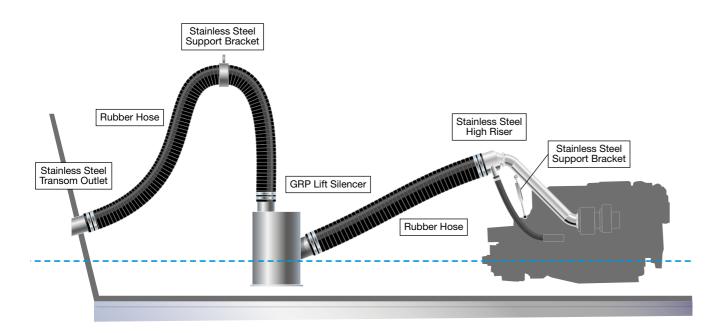


Example System - Standard In-line Lift Silencer with Discharge Above Waterline

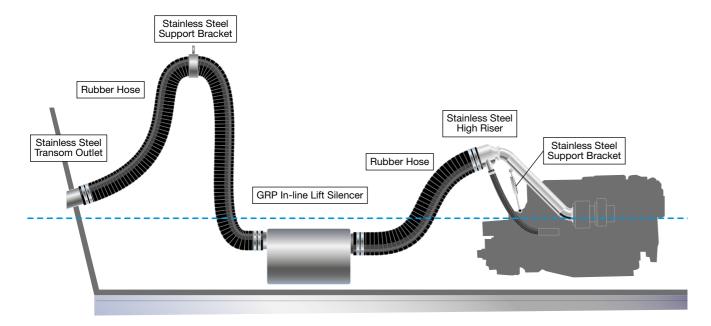


The information published by Halyard indicates the general suitability of our products for the types of applications for which they are designed. We cannot accept design responsibility for any specific installation unless we have confirmed in writing that the overall installation design is correct following our approval of detailed drawings or our physical survey of the vessel or equipment in which it will be used.

Example System - Single Chamber Lift Silencer with Bypass & Underwater Discharge

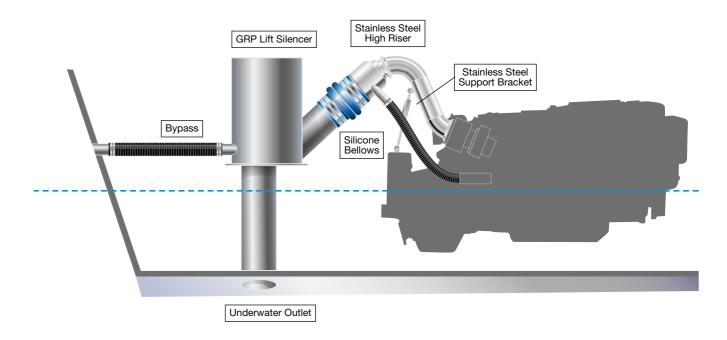


Example System - Dry Silencer to Spray Ring with Bypass & Underwater Discharge

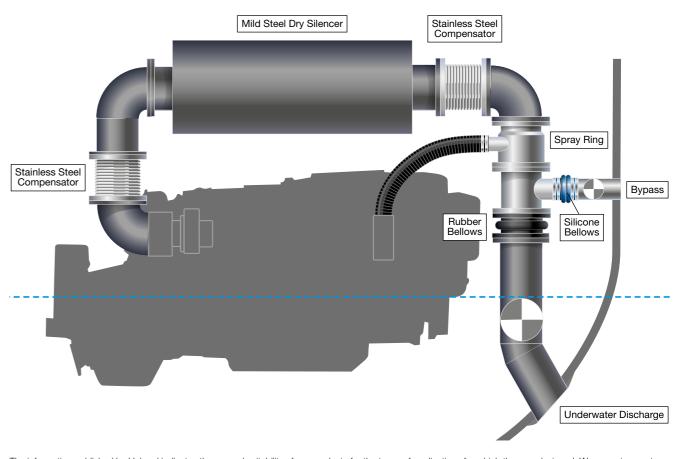


The information published by Halyard indicates the general suitability of our products for the types of applications for which they are designed. We cannot accept design responsibility for any specific installation unless we have confirmed in writing that the overall installation design is correct following our approval of detailed drawings or our physical survey of the vessel or equipment in which it will be used.

Example System - Single Chamber Lift Silencer & Separator with Discharge Above Waterline

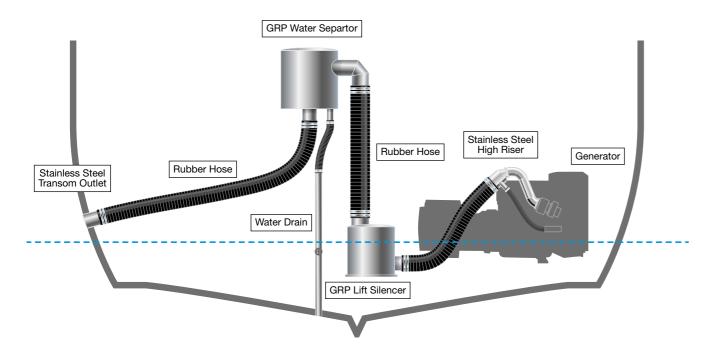

Example System - Combined Silencer & Separator with Gas Discharge up the Stack

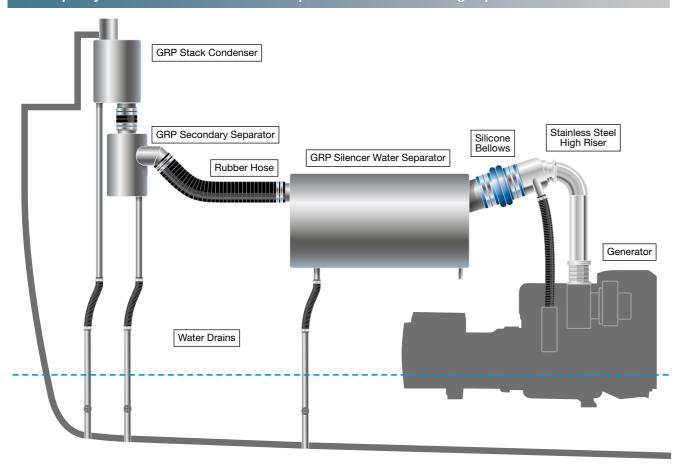


The information published by Halyard indicates the general suitability of our products for the types of applications for which they are designed. We cannot accept design responsibility for any specific installation unless we have confirmed in writing that the overall installation design is correct following our approval of detailed drawings or our physical survey of the vessel or equipment in which it will be used.

Water-Cooled GRP Lift Silencers - Top In / Top Out - Standard Products



		Lift Sile	encers -	Top In /	Top Out			
Part No.	Reference	, ,	4	В	С	D	E	Weight
Fait No.	neielelice	inch	mm	mm	mm	mm	mm	kg
H001671	HTT005	11/2	38	158	200	90	43.5	1.5
H001673	HTT025	15/8	41	158	200	90	43.5	1.5
H001674	HTT030	15/8	41	230	200	90	43.5	1.9
H001675	HTT040	13/4	45	158	200	90	43.5	1.5
H001676	HTT045	13/4	45	230	200	90	43.5	1.9
H001677	HTT055	2	51	158	200	90	43.5	1.6
H001678	HTT065	2	51	255	275	90	68	3.3
H001679	HTT070	2	51	305	324	90	84	4.9
H001680	HTT085	23/8	60	255	275	90	68	3.5
H001681	HTT090	21/2	63	255	275	90	68	3.5
H001682	HTT110	3	76	255	275	90	68	3.7
H001683	HTT115	31/2	89	305	324	90	84	5.6
H001684	HTT120	4	102	305	324	102	70	5.6
H001685	HTT125	5	127	370	446	127	83	10.4
H001686	HTT130	6	152	370	446	152	102	10.7
H010299	HTT135	8	203	521	548	203	122	17.9
New Rang	e of Moulded	Lift Sile	ncers -	Not Curre	ently Lloy	d's Regis	ter Type A	Approved
H025134	HTT065M	2	51	260	277	90	68	4.8
H025860	HTT085M	23/8	60	260	277	90	68	4.8
H025861	HTT090M	21/2	63	260	277	90	68	4.8
H025135	HTT110M	3	76	260	277	90	68	4.8
H026566	HTT115M	31/2	89	260	277	90	68	4.8




Drawings and dimensions are for guidance. Alternative sizes and configurations available on request.

Water-Cooled GRP Lift Silencers - Side In / Top Out - Standard Products



		L	ift Sile	encers	- Side	In / To	p Out				
Part No.	Reference	Α	.1	Α	2	В	С	D	E	F	Weight
rait ivo.	neielelice	inch	mm	inch	mm	mm	mm	mm	mm	mm	kg
H001615	HST005	11/2	38	11/2	38	169	200	90	43.5	95	1.5
H001616	HST010	11/2	38	11/2	38	230	200	90	43.5	139	1.8
H001617	HST025	15/8	41	15/8	41	169	200	90	43.5	95	2.2
H001618	HST035	15/8	41	15/8	41	255	275	90	68	165	3.3
H001619	HST055	13/4	45	13/4	45	230	200	90	43.5	139	1.9
H009936	HST105	2	51	2	51	230	200	90	43.5	139	1.9
H009525	HST110	2	51	2	51	255	275	90	68	165	3.3
H001623	HST115	2	51	2	51	305	324	90	84	200	4.9
H001624	HST145	23/8	60	23/8	60	305	324	90	84	200	5.1
H001625	HST150	23/8	60	23/8	60	255	275	90	68	165	3.5
H010352	HST165	21/2	63	21/2	63	255	275	90	68	165	3.5
H009937	HST200	3	76	3	76	255	275	90	68	165	4.4
H001629	HST205	3	76	3	76	305	324	90	84	184	6
H001630	HST210	31/2	89	31/2	89	305	324	90	84	184	5.6
H001631	HST215	4	102	4	102	305	324	102	60	184	5.6
H001632	HST220	5	127	5	127	370	446	127	99	222	10
H001633	HST225	5	127	5	127	343	342	127	64	219	6.6
H001634	HST230	6	152	6	152	370	446	152	99	254	11.4
H001635	HST235	6	152	8	203	370	446	152	64	222	12.4
H001636	HST240	8	203	8	203	585	500	203	83	392	15.6
H017157	HST250	10	254	10	254	576	635	254	145	400	30.1
New Ra	nge of Mou	lded L	ift Sile	ncers	- Not (Current	ly Lloyd	d's Reg	ister Ty	pe App	oroved
H025129	HST005M	11/2	38	11/2	38	260	277	90	68	165	4.8
H025130	HST025M	15/8	41	15/8	41	260	277	90	68	165	4.8
H025131	HST110M	2	51	2	51	260	277	90	68	165	4.8
H025855	HST150M	23/8	60	23/8	60	260	277	90	68	165	4.8
H025132	HST165M	21/2	63	21/2	63	260	277	90	68	165	4.8
H025133	HST200M	3	76	3	76	260	277	90	68	165	4.8
H026567	HST210M	31/2	89	3	76	260	277	90	68	165	4.8




Drawings and dimensions are for guidance. Alternative sizes and configurations available on request.

Water-Cooled GRP Lift Silencers - Side Angle In / Top Out - Standard Products



	Lift Silencers - Side Angle In / Top Out													
Part No.	Reference	A	١	В	С	D	E	F	G°	Weight				
		inch	mm	mm	mm	mm	mm	mm	G	kg				
H001454	HAT015	23/8	60	270	275	90	68	175	30	3.6				
H001456	HAT020	3	76	270	275	90	68	175	30	3.9				
H001458	HAT025	31/2	89	305	324	90	84	184	30	5.5				
H001459	HAT030	31/2	89	266	275	90	50	152	30	4.4				
H001460	HAT035	4	102	480	324	102	70	300	35	7.8				
H001461	HAT040	4	102	305	324	102	70	184	35	5.7				
H001462	HAT043	41/2	114	480	324	114	70	300	35	7.9				
H001463	HAT045	5	127	480	324	127	70	300	35	8.7				
H001464	HAT050	6	152	370	446	152	100	222	35	11.2				
H010302	HAT055	8	203	521	548	203	122	323	55	18.6				
H017158	HAT060	10	254	660	650	254	148	374	55	29.6				
New Rang	e of Moulde	d Lift S	ilence	rs - No	ot Curr	ently Ll	loyd's F	Registe	r Type	Approved				
H025856	HAT010M	2	51	260	277	90	68	165	30	4.8				
H025857	HAT015M	23/8	60	260	277	90	68	165	30	4.8				
H025858	HAT020M	3	76	260	277	90	68	165	30	4.8				
H025859	HAT030M	31/2	89	260	277	90	68	165	30	4.8				
	•													




Drawings and dimensions are for guidance. Alternative sizes and configurations available on request.

Water-Cooled GRP Lift Silencers - End In / End Out - Standard Products



Lift Silencers - End In / End Out													
Part No.	Reference	A		ВС		D	E	Weight					
		inch	mm	mm	mm	mm	mm	kg					
H001496	HEE005	11/2	38	250	178	90	141	1.7					
H001497	HEE010	1 ⁵ /8	41	250	178	90	133	1.8					
H001498	HEE020	13/4	45	250	178	90	133	1.8					
H001499	HEE035	2	51	310	178	90	133	2.1					
H001500	HEE040	2	51	420	254	90	195	4.2					
H001501	HEE045	2	51	250	178	90	133	1.8					
H001502	HEE060	23/8	60	310	254	90	195	3.7					
H001503	HEE065	23/8	60	420	254	90	195	4.4					
H001504	HEE070	21/2	63	420	254	90	195	4.4					
H001505	HEE080	3	76	420	254	90	195	4.7					
H001506	HEE090	31/2	89	465	254	90	188	5.2					
H001507	HEE095	4	102	462	305	102	222	6.8					
H001508	HEE100	41/2	114	462	305	114	220	7.0					
H001509	HEE105	5	127	599	305	127	220	8.8					
H001510	HEE110	6	152	640	346	152	260	11.4					
H010303	HEE115	8	203	695	446	203	297	18.4					




Drawings and dimensions are for guidance. Alternative sizes and configurations available on request.

Water-Cooled GRP In-line Round Body Silencers - Standard Products



	In-line Round Body Silencers													
Part No.	Reference	Α	A1		2	В	С	D	E	Weight				
		inch	mm	inch	mm	mm	mm	mm	mm	kg				
H001524	HILR003	23/8	60	2.38	60	152	212	90	41	1.8				
H001525	HILR005	3	76	3	76	203	335	90	59	3.5				
H001526	HILR010	31/2	89	31/2	89	203	390	90	53	4.2				
H001527	HILR015	4	102	4	102	254	465	102	68	6.4				
H001528	HILR020	41/2	114	41/2	114	254	502	114	61	6.8				
H001529	HILR025	5	127	5	127	254	546	127	55	7.9				
H001530	HILR030	5	127	6	152	305	762	127	65	12.1				
H001531	HILR035	6	152	6	152	305	661	152	65	11.4				
H001532	HILR040	6	152	8	203	398	880	152	91	22.0				
H001533	HILR045	8	203	8	203	395	880	203	88	23.0				
H001534	HILR050	10	254	10	254	446	1092	254	87	32.0				
H001535	HILR055	12	305	12	305	489	1308	305	87	41.0				



Drawings and dimensions are for guidance. Alternative sizes and configurations available on request. All units are made to order and customisable.

Water-Cooled GRP In-line Oval Body Silencers - Standard Products



		ln-	line (Oval E	Body 9	Silenc	ers				
Part No.	Reference	Α	\1	Α	2	В	С	D	E	F	Weigh
		inch	mm	inch	mm	mm	mm	mm	mm	mm	kg
H001517	HILO005	5	127	5	127	520	127	225	385	118	10.8
H001518	HILO006	5	127	6	152	640	127	225	385	105	10.6
H001519	HILO010	6	152	6	152	640	152	225	385	105	9.5
H001520	HILO012	6	152	8	203	928	152	270	420	93	12.2
H001521	HILO015	8	203	8	203	876	203	270	420	93	16.3
H001522	HILO016	8	203	10	254	758	203	295	465	87	21.6
H001523	HILO020	10	254	10	254	1092	254	365	630	164	39.0

Inlet
A1

Outlet
A2

Drawings and dimensions are for guidance. Alternative sizes and configurations available on request. All units are made to order and customisable.

Water-Cooled GRP Dual Chamber Silencers - Standard Products



	Dual Chamber Silencers												
Part No.	Reference	Α	1	A2		В	С						
		inch	mm	inch	mm	mm	mm						
H008419	HDC025	4	102	4	102	600	446						
H001488	HDC035	5	127	5	127	700	446						
H001489	HDC040	5	127	6	152	800	446						
H001490	HDC045	6	152	6	152	800	446						
H001491	HDC050	6	152	8	203	800	446						
H001492	HDC055	8	203	8	203	900	648						
H001493	HDC060	8	203	10	254	900	650						
H001494	HDC065	10	254	10	254	1000	650						
H001495	HDC070	12	305	12	305	1000	650						

A2 Outlet

Inlet

A1

C

C


Drawings and dimensions are for guidance. Alternative sizes and configurations available on request. All units are made to order and customisable.


Water-Cooled GRP Combined Silencer / Separators - Standard Products



	Combined Silencer / Separators												
Part No.	T		4	В		С		D	E				
	Туре	inch	mm	inch	mm	inch	mm	mm	mm				
ML-0382-01	Side in, bottom out	31/2	89	31/2	89	2	51	617	370				
ML-0382-02	Side in, bottom out	4	102	4	102	3	76	641	370				
ML-0382-03	Side in, bottom out	5	127	5	127	3	76	750	430				
ML-0382-04	Side in, bottom out	6	152	6	152	3	76	920	470				
ML-0364-01	Side in, horizontal top out	31/2	89	31/2	89	2	51	595	370				
ML-0364-02	Side in, horizontal top out	4	102	4	102	3	76	626	370				
ML-0364-03	Side in, horizontal top out	5	127	5	127	3	76	725	430				
ML-0364-04	Side in, horizontal top out	6	152	6	152	3	76	904	470				

Drawings and dimensions are for guidance. Alternative sizes and configurations available on request. All units are made to order and customisable.



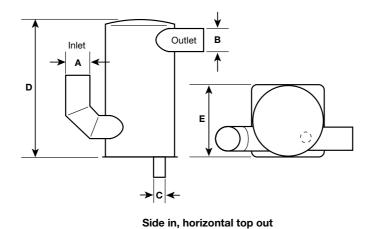


GRP Low Profile Water Separator - Standard Products



	GRP Low Profile Water Separator											
Part No.	Reference	Α		В	С	D	E	E		G	Н	Weight
	Reference	inch	mm	mm	mm	mm	inch	mm	mm	mm	mm	kg
H014054	HFS020	2	51	125	75	305	11/2	38	96	76	65	4.4
H001511	HFS025	21/2	63	140	100	346	11/2	38	144	100	70	4.8
H001514	HFS030	3	76	140	110	398	2	51	144	100	70	6.5
H001515	HFS035	31/2	89	140	110	398	2	51	144	107	70	6.5
H001516	HFS040	4	102	170	110	398	2	51	144	107	85	7.0
H007116	HFS050	5	127	175	125	494	21/2	63	140	107	88	12.5
H010304	HFS060	6	152	215	151	594	21/2	63	175	107	105	17.1

Drawings and dimensions are for guidance. Alternative sizes and configurations available on request.

This separator has universal inlet and outlet tubes. The tubes marked 'A' can be used as either inlet or outlet






GRP General Water Separator - Standard Products



	GRP General Water Separator										
Part No.	Reference	A1	A2	В	С	D	Е	F	G	Weight	
	Reference	mm	mm	mm	mm	mm	mm	mm	mm	kg	
H001687	HWS030	76	76	38	240	356	346	120	110	7.6	
H001688	HWS035	89	89	38	264	356	346	120	110	7.8	
H001689	HWS040	102	102	38	282	356	346	120	100	9.5	
H001690	HWS050	127	127	51	310	406	398	150	110	11.1	
H001691	HWS060	152	152	51	335	406	398	158	100	12.1	

Drawings and dimensions are for guidance. Alternative sizes and configurations available on request.

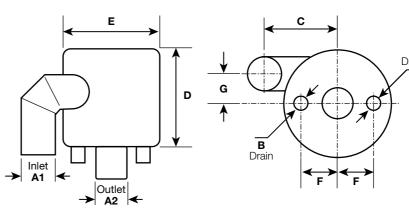




MS4000 Series Moulded Water Separator - Standard Products

Halyard's exhaust water separator range is available with inlet / outlet diameters from 38mm (1.5") to 76mm (3"). Manufactured from a special high temperature Polyolefin and available from stock.


MS4020 38mm 90° Outlet MS4025 40mm 90° Outlet	
Exhaust: 38mm and 40mm	
Gas Outlet: 38mm and 40mm	
Maximum Water Flow: 18 Litres Per Minute	
Weight: 1kg	




MS5000 Series Moulded Water Separator - Standard Products

MS5020 45mm and 50mm 90°	Outlet
Exhaust: 45mm and 50mr	n
Gas Outlet: 50mm	
Maximum Water Flow: 42 Litres P	er Minute
Weight: 1.7kg	






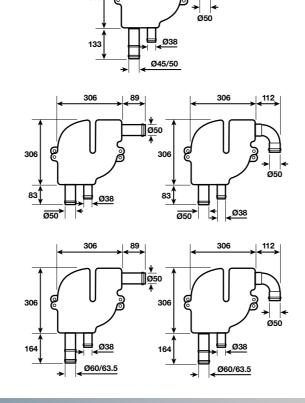

MS7000 Series Moulded Water Separator - Standard Products

MS7510 76mm 90° Outlet	
Exhaust: 76mm	
Gas Outlet: 76mm	
Maximum Water Flow: 65 Litres Per Minute	
Weight: 3.3kg	



GRP Exhaust Tube



		(RP Tube			
Part No.	Reference	A Nomi	A Nominal O.D.		Weight kg per m	B Standard Length
H000526	HT001	3/4	19	mm 3.5	0.25	1.2
H000527	HT005	1	25	2.6	0.33	1.2
H000528	HT010	11/2	38	4	0.5	1.2
H000529	HT015	15/8	41	2.3	0.5	1.2
H000530	HT020	13/4	45	2.5	0.6	1.2
H009939	HT030	2	51	2.5	0.7	3
H009940	HT040	23/8	60	3	0.9	3
H009953	HT045	21/2	63	3.5	1	3
H009954	HT055	3	76	4	1.3	3
H009965	HT060	31/2	89	4	1.5	3
H009966	HT065	4	102	4	1.9	3
H010014	HT070	41/2	114	4	2.2	3
H010017	HT075	5	127	4	2.5	3
H010018	HT080	6	152	4	2.9	3
H010028	HT082	7	178	4.5	3.7	3
H010030	HT085	8	203	4.5	4.5	3
H010034	HT090	10	254	4.5	5.5	3
H010036	HT095	12	305	4.5	6.8	3
H010040	HT100	135/8	346	5	7.7	3
H010041	HT105	15 ⁴³ / ₆₄	398	4.5	8.9	3
H010371	HT115	1913/32	493	5	10.9	3
H010042	HT120	2311/32	593	5	14.7	3

Drawings and dimensions are for guidance. Alternative sizes and up to 1000mm O.D. configurations available on request.

			GRP Tube			
Part No.	Reference	A Nomi	inal O.D.	Nominal Wall Thickness	Weight kg per m	B Standard Length
		inch	mm	mm		m
H000526	HT001	3/4	19	3.5	0.25	1.2
H000527	HT005	1	25	2.6	0.33	1.2
H000528	HT010	1 ¹ / ₂	38	4	0.5	1.2
H000529	HT015	15/8	41	2.3	0.5	1.2
H000530	HT020	13/4	45	2.5	0.6	1.2
H009939	HT030	2	51	2.5	0.7	3
H009940	HT040	23/8	60	3	0.9	3
H009953	HT045	21/2	63	3.5	1	3
H009954	HT055	3	76	4	1.3	3
H009965	HT060	31/2	89	4	1.5	3
H009966	HT065	4	102	4	1.9	3
H010014	HT070	41/2	114	4	2.2	3
H010017	HT075	5	127	4	2.5	3
H010018	HT080	6	152	4	2.9	3
H010028	HT082	7	178	4.5	3.7	3
H010030	HT085	8	203	4.5	4.5	3
H010034	HT090	10	254	4.5	5.5	3
H010036	HT095	12	305	4.5	6.8	3
H010040	HT100	135/8	346	5	7.7	3
H010041	HT105	15 ⁴³ / ₆₄	398	4.5	8.9	3
H010371	HT115	1913/32	493	5	10.9	3

Diameters from 2" to 24" are supplied with peel-ply wrapping - a special layer which the customer peels off to leave a course outer surface requiring minimal preparation.


Lloyd's Approved resins with special temperature ratings are used in the manufacture of this tube (applies to tube over 2"/51mm only).

Part numbers H000526 - H000530, do not have Lloyd's Approval.

Note: Lloyd's Type Approval is applicable for Halyard GRP products in exhaust system applications.



GRP Exhaust Connectors										
Part No.	Reference	A Nomi	nal O.D.	В	Weight kg					
Fait NO.	nelelelice	inch	mm	mm						
H001536	HJ010	11/2	38	175	0.1					
H001537	HJ015	1 ⁵ / ₈	41	175	0.1					
H001538	HJ020	13/4	45	175	0.1					
H001539	HJ030	2	51	200	0.15					
H001540	HJ040	23/8	60	200	0.2					
H001541	HJ045	21/2	63	200	0.25					
H001542	HJ055	3	76	250	0.4					
H001543	HJ060	31/2	89	250	0.5					
H001544	HJ065	4	102	300	0.65					
H001545	HJ070	41/2	114	300	0.75					
H001546	HJ075	5	127	300	0.85					
H001547	HJ080	6	152	350	1.1					
H007269	HJ082	7	178	350	1.35					
H001548	HJ085	8	203	350	1.7					
H001549	HJ090	10	254	400	2.4					
H001550	HJ095	12	305	400	2.7					



A


22 Halyard Products Range Halyard Products Range 23




GRP Exhaust Tube & Connectors



	GRP Reducers										
Part No.	Reference	A1 O.D.		A2 O.D.		В	С	L	Weight		
Part No.	neierence	inch	mm	inch	mm	mm	mm	mm	kg		
H001442	HA020	2	51	3	76	102	78	205	0.4		
H001443	HA035	21/2	63	3	76	102	95	222	0.4		
H001444	HA050	3	76	31/2	89	125	102	252	0.5		
H001445	HA055	3	76	4	102	142	102	269	0.6		
H001446	HA060	31/2	89	4	102	142	125	293	0.7		
H001447	HA065	31/2	89	41/2	114	140	125	290	0.9		
H001448	HA070	4	102	5	127	158	142	326	1.1		
H001449	HA075	4	102	6	152	177	142	370	1.7		
H001450	HA095	5	127	6	152	177	158	361	1.8		
H001451	HA096	6	152	7	178	240	177	467	1.9		
H001452	HA110	6	152	8	203	225	177	452	2.1		
H001453	HA115	8	203	10	254	279	225	555	3.5		



		GRP	45° Elbow	/S		
Part No.	Reference	A1 Nom	inal O.D.	В	С	Weight
ran No.	neierence	inch	mm	mm	mm	kg
H001409	H45025	2	51	161	103	0.2
H001410	H45035	23/8	60	166	111	0.3
H001411	H45040	21/2	63	188	123	0.4
H001412	H45050	3	76	213	142	0.6
H001414	H45055	31/2	89	282	181	0.8
H001415	H45060	4	102	243	173	0.7
H001417	H45065	41/2	114	181	208	1.0
H001418	H45070	5	127	339	230	1.2
H001419	H45075	6	152	376	263	2.0
H007270	H45077	7	178	599	374	2.5
H001420	H45080	8	203	710	438	4.5
H001421	H45085	10	254	776	501	5.5
		GRP	90° Elbow	/S		
H001422	H90005	11/2	38	121	121	0.3
H001424	H90025	2	51	150	150	0.4
H001425	H90035	23/8	60	158	158	0.5
H001426	H90040	21/2	63	177	177	0.5
H001427	H90050	3	76	197	197	0.8
H001428	H90055	31/2	89	229	229	1.0
H001429	H90060	4	102	242	242	1.2
H001430	H90065	41/2	114	269	269	1.5
H001431	H90070	5	127	308	308	1.8
H001433	H90075	6	152	358	358	2.5
H001435	H90077	7	178	542	542	4.0
H001436	H90080	8	203	580	580	5.6
H010290	H90085	10	254	659	659	6.5
H001438	H90090	12	305	762	762	8.0
		GRP 1	80° Elbov	ws		
H001398	H180015	13/4	45	133	124	0.3
H001399	H180025	2	51	153	154	0.6
H001400	H180035	23/8	60	181	150	0.6
H001401	H180040	21/2	63	192	166	0.7
H001402	H180050	3	76	214	187	1.1
H001403	H180055	31/2	89	268	219	1.6
H001404	H180060	4	102	293	228	1.8
H001405	H180070	5	127	380	310	3.0
H001406	H180075	6	152	427	327	3.6
H007310	H180080	7	178	531	455	5.0
H001407	H180085	8	203	684	547	7.0

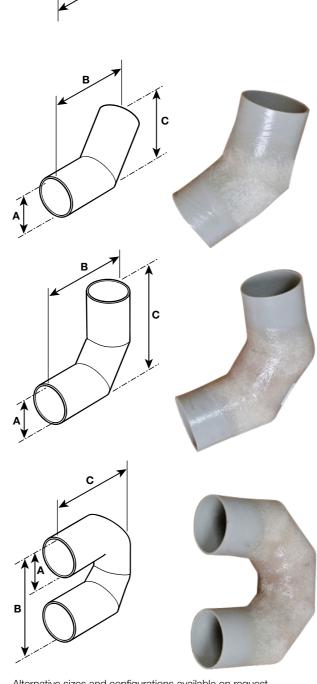

Alternative sizes and configurations available on request.

Dry Silencers

UK based IMS are global leaders in noise reduction and particulate filtering, manufacturing absorptive and reactive exhaust gas silencers. Halyard is the marine market distributor for IMS dry silencers.

Reactive Exhaust Gas Dry Silencer

This range of reactive silencers are designed primarily for use with internal combustion engine exhausts. The units can be installed vertically, horizontally or inclined, without affecting performance. They are of fully welded design, sturdily constructed in carbon steel with a heat resisting aluminium or black paint finish to ensure a long service life. All units are fitted with drain points to remove exhaust condensate. The acoustically treated MA type silencer increases the higher frequency performance by up to 10dB(A), reducing casing breakout as well as lowering the surface temperature. The units can be used where good overall acoustic performance is required without a secondary or terminal silencer.

Absorptive Exhaust Gas Dry Silencer

This range of silencers are straight through absorption type, suitable for vertical, horizontal or inclined installations. The design gives good attenuation in the higher frequency octave bandwidths and is, therefore, versatile in its application as an exhaust silencer or intake silencer on internal combustion engines. When used as a secondary or terminal silencer in conjunction with a highperformance reactive silencer, stringent noise limitations can be achieved as a result of their complementary effect on the noise spectrum. They are of all welded design, sturdily constructed in carbon steel with a heat resisting aluminium or black paint finish to ensure a long service life.



Options for both reactive and absorptive silencers:

- BS10 Table 'D' flanges fitted as standard
- Alternative flange patterns on request for example PN flanges
- B.S.P. connections available on smaller sizes
- · Radial/axial Inlet & Outlet
- · Heat resistant aluminium or black paint
- Shot blast and aluminium metal sprayed Stainless steel grades such as 304 / 316 available
- Corten steel
- Support feet and brackets
- Anti-vibration mounts
- Lifting lugs
- Spark arrestors
- Thermal Insulation Jackets / Stainless Steel Cladding
- Marine Classification Certification

The most common silencers sold by Halyard into the marine industry are the M31/MA31, M51/MA51 and FP ranges. There are, however, also the M21/MA21, M41/MA41, MRA1/MAA1, MRA2/MAA2, MRA3/ MAA3, MSA & BTS ranges with different configurations and specifications available on request.


24 Halyard Products Range Halyard Products Range 25





Dry Silencers - M31 Reactive Critical Grade Exhaust Silencers

The M31 range of semi-residential reactive silencers are a medium attenuation design recommended for use where equipment must operate with a reduced noise level. Highly efficient and of advanced acoustical design, they are suitable for the exhausts or intakes of all two-stroke and four-stroke internal combustion engines, compressors and blowers. The units can be mounted vertically, horizontally or inclined, without affecting efficiency. The M31 'semi-residential grade' reactive exhaust silencer range are of all welded design, sturdily constructed in carbon steel with a heat resisting aluminium or black paint finish to ensure a long service life. All units are fitted with drain points to remove exhaust condensate.

MA31 Range is acoustically treated MA31 type silencer increases the higher frequency performance by up to 11dB(A), reducing casing breakout as well as lowering the surface temperature. The units can be used where good overall acoustic performance is required without a secondary or terminal silencer.





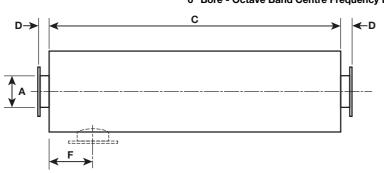



	MA31 Series											
		All	M31	MA31	All	All	M31	MA31	All	All	Weight	Weight
Silencer F	Ref.	Α	В	В	С	D	E	E	F Min.	F Max.	M31	MA31
		Inch	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
M31/MA31	038	1.5	160	260	600	50	155	205	60	250	3	4
M31/MA31	050	2	210	310	600	50	180	230	60	250	5	6
M31/MA31	063	2.5	260	360	700	50	205	255	70	380	8	10
M31/MA31	075	3	310	410	800	50	230	280	90	430	14	16
M31/MA31	090	3.5	360	460	900	75	255	305	150	480	32	36
M31/MA31	100	4	360	460	1000	75	255	305	160	490	45	50
M31/MA31	125	5	410	510	1200	75	280	330	180	530	54	62
M31/MA31	150	6	460	560	1400	75	305	355	190	590	78	95
M31/MA31	175	7	540	640	1400	75	350	400	200	590	100	135
M31/MA31	200	8	560	660	1800	75	355	405	220	810	130	170
M31/MA31	225	9	660	760	1800	75	420	470	235	810	190	230
M31/MA31	250	10	660	760	2100	75	420	470	250	1100	210	280
M31/MA31	300	12	760	860	2500	100	470	520	280	1150	340	390
M31/MA31	350	14	920	1020	2800	100	550	600	320	1350	440	500
M31/MA31	400	16	1020	1120	2900	100	600	650	340	1450	610	700
M31/MA31	450	18	1170	1270	3000	100	685	735	370	1500	840	940
M31/MA31	500	20	1270	1370	3400	100	735	785	400	1700	990	1050
M31/MA31	550	22	1370	1470	3700	100	785	835	430	1800	1200	1400
M31/MA31	600	24	1470	1570	4000	100	915	965	460	2000	1550	1800


Dry Silencers - M51 Critical Grade Exhaust Silencers

The M51 range of 'critical grade' exhaust silencers has been designed to meet the increasingly stringent noise criteria required in a pollution conscious environment. Generally specified for use on two stroke and four-stroke internal combustion engine exhausts, the units give good low frequency attenuation in the normal engine firing frequency ranges. The units can be installed horizontally, vertically or inclined, without affecting efficiency. The M51 'residential grade' reactive exhaust silencer range are of all welded design, sturdily constructed in carbon steel with a heat resisting aluminium or black paint finish to ensure a long service life. All units are fitted with drain points to remove exhaust condensate.

The acoustically treated MA51 type silencer increases the higher frequency performance by up to 13dB(A), reducing casing breakout as well as lowering the surface temperature. The units can be used where good overall acoustic performance is required without a secondary or terminal silencer.





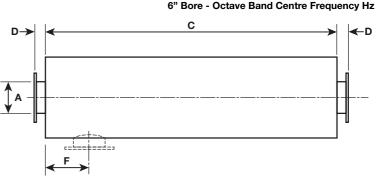


	MA51 Series													
		All	M51	MA51	All	All	M51	MA51	All	All	Weight	Weight		
Silencer R	ef.	Α	В	В	С	D	Е	Е	F Min.	F Max.	M51	MA51		
		Inch	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg		
M51/MA51	038	1.5	160	260	800	50	155	205	60	400	9	10		
M51/MA51	050	2	210	310	900	50	180	230	60	450	16	17		
M51/MA51	063	2.5	260	360	1000	50	205	255	70	500	36	38		
M51/MA51	075	3	310	410	1200	50	230	280	90	600	45	47		
M51/MA51	090	3.5	360	460	1300	75	255	305	150	650	80	85		
M51/MA51	100	4	360	460	1500	75	255	305	160	750	90	98		
M51/MA51	125	5	410	510	1700	75	280	330	180	850	130	150		
M51/MA51	150	6	460	560	2000	75	305	355	190	1000	168	200		
M51/MA51	175	7	540	640	2000	75	350	400	200	1000	220	280		
M51/MA51	200	8	560	660	2400	75	355	405	220	1200	265	300		
M51/MA51	225	9	660	760	2400	75	420	470	235	1200	320	360		
M51/MA51	250	10	660	760	2800	75	420	470	250	1400	390	480		
M51/MA51	300	12	760	860	3500	100	470	520	280	1500	580	650		
M51/MA51	350	14	920	1020	3600	100	550	600	320	1500	710	800		
M51/MA51	400	16	1020	1120	4000	100	600	650	340	1600	920	1000		
M51/MA51	450	18	1170	1270	4600	100	685	735	370	1800	1150	1250		
M51/MA51	500	20	1270	1370	5300	100	735	785	400	2200	1400	1550		
M51/MA51	550	22	1370	1470	5700	100	785	835	430	2300	1780	2000		
M51/MA51	600	24	1470	1570	6000	100	915	965	460	2500	2070	2400		





Dry Silencers - FP Straight Through Absorption Silencers

The FP series silencer is a straight through absorption type, suitable for vertical and horizontal installations. The design gives good attenuation in the higher frequency octave band widths and is, therefore, versatile in its application as an intake or exhaust silencer on fan blowers, centrifugal compressors, internal combustion engines, and small low-pressure gas vents and steam ejectors. When used as a secondary or terminal silencer in conjunction with a high performance reactive silencer, stringent noise limitations can be achieved as a result of their complementary effect on the noise spectrum. The FP 'industrial grade' absorptive

silencer series are of all welded design, sturdily constructed in carbon steel with a heat resisting aluminium or black paint finish to ensure a long service life.





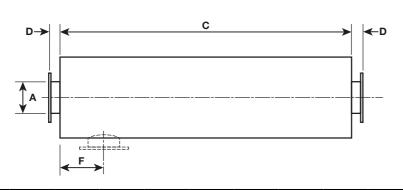

	FP 1/2 Series													
	All	FP	FP1/2	FP	FP1	FP2	All	FP	FP1/2	All	Weight	Weight	Weight	
Silencer Ref.	Α	В	В	С	С	С	D	E	Е	F	FP	FP1	FP2	
	Inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	
FP/1/2 038	1.5	115	178	600	800	1100	50	93	160	60	3	10	14	
FP/1/2 050	2	115	210	700	850	1200	50	98	180	60	5	17	20	
FP/1/2 063	2.5	140	210	700	850	1200	50	110	180	70	6	25	35	
FP/1/2 075	3	152	230	700	900	1250	50	126	190	90	9	35	55	
FP/1/2 090	3.5	178	310	850	950	1350	75	164	230	150	15	60	80	
FP/1/2 100	4	230	360	850	1100	1600	75	190	255	160	20	85	125	
FP/1/2 125	5	310	410	850	1200	1800	75	230	280	180	30	120	160	
FP/1/2 150	6	360	460	1150	1400	1900	75	255	305	190	46	160	220	
FP/1/2 175	7	360	460	1150	1500	2300	75	255	305	200	47	170	250	
FP/1/2 200	8	410	610	1450	1650	2500	75	280	355	220	64	190	280	
FP/1/2 225	9	410	610	1450	1800	2600	75	280	355	235	68	220	320	
FP/1/2 250	10	460	660	1750	2000	2700	75	305	430	250	130	290	400	
FP/1/2 300	12	560	760	2200	2200	3200	100	380	480	280	200	400	500	
FP/1/2 350	14	560	760	2200	2400	3300	100	380	480	320	218	490	680	
FP/1/2 400	16	660	920	2600	2700	3700	100	430	550	340	280	630	850	
FP/1/2 450	18	660	920	2900	3000	4200	100	430	550	370	310	780	1000	
FP/1/2 500	20	760	1070	2900	3300	4500	100	480	640	400	330	900	1200	
FP/1/2 550	22	760	1270	3200	3600	4800	100	480	735	430	375	1100	1400	
FP/1/2 600	24	810	1370	3500	3700	5000	100	505	835	460	430	1300	1800	



SCR and DPF Aftertreatment Systems

Customer requirements and vessel machinery spaces are many and varied. These range from the need to meet statutory emissions regulations, through to the requirement to eliminate soot from blemishing the deck of a luxury yacht. Along with this there is often the need to engineer the solution to make best use of restricted space. Whether for a commercial vessel or superyacht, new build or retrofit Halyard with Xeamos can propose a solution optimised for reliability, control, and efficiency.

Halyard work with Xeamos BV to provide the most suitable, optimised system for each project.

Xeamos SCR and DPF systems & Dual Exhaust Aftertreatment Systems (DPF/SCR):


Xeamos is driven by technology to develop bespoke compact solutions that are optimised for every engine room. Engineering expertise and unrivalled knowledge of how best to reduce emissions is key. Meticulous planning of the design and implementation of engineering technology products is assured by an in-depth understanding of how applications work in practice. From thermal engineering and fluid dynamics to acoustics, every aspect of the physical principles involved is taken into account.

Xeamos Main Features:

- Partical Matter (soot) reduction up to 97%
- NOx reduction up to 97%
- Safety bypass DPF (100% engine availability)
- Active regeneration (fuel burner of electric heater)
- Combined controller (up to 3 systems on 1 controller)
- Customizable
- Compact design (urea injector and mixing tube integrated)
- Closed loop system
- Integrated sound attenuation
- Certificate holder of most common engines, GDA and IMO Tier III EIAPP (refit & new build)

Please contact Halyard for further information and to discuss your specific requirements.



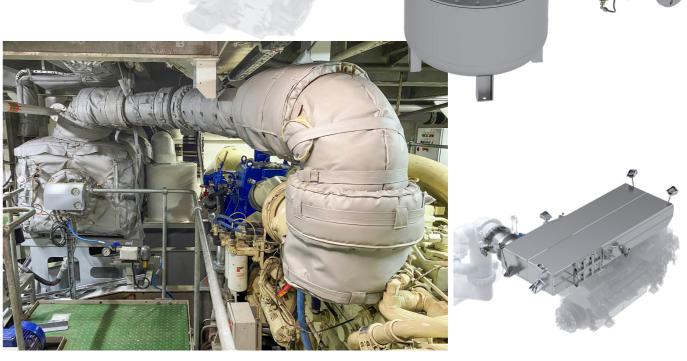



in a stylish new standard 52mm diameter, IP67 waterproof gauge.

The new system incorporates self-test functionality with touch screen control and is supplied as a 12/24 dual voltage unit. Available with a choice of chrome or black bezel and black or white gauge faces to compliment your existing gauges.

Exhaust Alert - Gauge System

Part No.	Reference	Exhaust Alert System
		Sets
H021248	AS125	Single engine single station gauge display with removable through hose sensor with 16 metre cable
H021250	AS145	Single engine dual station gauge displays with removable through hose sensors with 16 metre cable
H021252	AS225	Twin engine single station gauge displays with removable through hose sensors with 16 metre cable
H021254	AS245	Twin engine dual station gauges with removable through hose sensors with 16 metre cable
H020170	AS701	Master display suitable for 1-2 engines, 52mm diameter gauge with white card and Chrome bezel
H020171	AS702	Repeater display to be used in conjunction with master display for a second station
H024728	AS905	120 degree Hose Sensor
H024729	AS906	140 degree Hose Sensor
H021389	AS780	Connector block for wiring in displays to power and sensors

Gauge







Part No.	Reference	Exhaust Alert System
		OEM -Kits
H000424	AS180	OEM Control Box kit (12/24 Volt) with single through hose sensor with 16 metre cable
H000433	AS280	OEM Control Box kit (12/24 Volt) with twin through hose sensors with 16 metre cables
H000439	AS380	OEM Control Box kit (12/24 Volt) with triple through hose sensors with 16 metre cables

Exhaust Alert - Options

Part No.	Reference	Exhaust Alert System
		Options
H000447	AS777	Optional 120dB 12V siren
H021451	AS778	Optional 120dB 24V siren
		OEM Control Box - For Vessel Display Integration
H024727	AS705/AS706	Control box suitable for use with Halyard exhaust alert sensors, used to integrate into vessel alarm system/display, 12/24V input, common alarm output matches input voltage





OEM Control Box



Thermal Insulation Jackets

Thermal insulation jackets can be supplied to suit your new exhaust system or can also be made and supplied as replacements for your existing system.

These are available with either a grey or black finish.

Carbon Fibre Halyard 'Heatshell' is also an option for certain systems.





Hot Lag

Hot Lag										
Part No.	Reference	Description								
H000532 HTL05090 5m x 100mm wide, 6mm thick										

Hot lag is designed for lagging hot exhaust systems with a thermal insulator which is asbestos free. It has a nominal width of 100mm (4") by 5mm ($^{1}/_{2}$ ") and may be held in place with stainless steel wire or hose clamps.



Flexible Exhaust Bends - Standard Products



Flexible 45° Black EPDM Bends 100°C Continuous												
Part No.	Reference	I.D.		Α	В	С	D	R	W	Hose		
Fait No.	neierence	inch	mm	mm	mm	mm	mm	mm	mm	Clamp		
H003337	CBR450040	2	51	125	125	50	50	50	5	H000510		
H003338	CBR450050	3	76	145	145	50	50	95	6.5	H000515		
H003339	CBR450055	31/2	89	155	155	50	50	100	6.5	H000517		
H003340	CBR450060	4	102	160	160	50	50	102	7	H024246		
H003341	CBR450065	5	127	240	240	50	50	187	8	H024249		
H003342	CBR450070	6	152	350	350	60	60	250	8	H024250		
H003343	CBR450075	8	203	400	400	65	65	300	10	H024252		
H003344	CBR450080	10	254	425	425	65	65	350	12	H024253		


	Flexible 90° Black EPDM Bends 100°C Continuous												
Part No.	Reference	1.1	D.	Α	В	С	D	R	W	Hose			
Part No.	neierence	inch	mm	mm	mm	mm	mm	mm	mm	Clamp			
H003345	CBR90040	2	51	125	125	50	50	50	5	H000510			
H003346	CBR90045	21/2	63.5	145	145	50	50	95	5	H000513			
H003347	CBR90050	3	76	145	145	50	50	95	6.5	H000515			
H003348	CBR90055	31/2	89	155	155	50	50	100	6.5	H000517			
H003349	CBR90060	4	102	160	160	50	50	110	7	H024246			
H003350	CBR90065	5	127	240	240	50	50	187	8	H024249			
H003351	CBR90070	6	152	350	350	60	60	250	8	H024250			
H003352	CBR90075	8	203	400	400	65	65	300	10	H024252			
H003353	CBR90080	10	254	425	425	65	65	350	12	H024253			

	Flexible 45° Silicone Bends 180°C Continuous												
Part No.	Reference	I.D.		Α	В	С	D	R	W	Hose			
Fait NO.	nelelelice	inch	mm	mm	mm	mm	mm	mm	mm	Clamp			
H003319	CB45040	2	51	125	125	50	50	50	5.5	H000510			
H003320	CB45050	3	76	145	145	50	50	95	7	H000515			
H003321	CB45055	4	102	102	160	50	50	110	7	H024247			
H003322	CB45065	5	127	240	240	50	50	187	7	H000487			
H003318	CB45070	6	152	350	350	60	60	250	7	H024251			


Flexible 90° Silicone Bends 180°C Continuous												
Part No.	D. (I.D.		Α	В	С	D	R	W	Hose		
Part No.	Reference	inch	mm	mm	mm	mm	mm	mm	mm	Clamp		
H003324	CB90040	2	51	125	125	50	50	50	5.5	H000510		
H003325	CB90045	21/2	63.5	145	145	50	50	95	5.5	H000513		
H003326	CB90050	3	76	145	145	50	50	95	7	H000515		
H003327	CB90055	3	89	155	155	50	50	100	7	H000517		
H003328	CB90060	4	102	160	160	50	50	110	7	H024247		
H003329	CB90065	5	127	240	240	50	50	187	7	H000487		
H003330	CB90070	6	152	350	350	60	60	250	7	H024251		
H003331	CB90075	8	203	350	350	65	65	300	7	H024252		


Options

- Extremely high temperature Nomex bends rated to 260°C
- Alternative sizes and configurations











32 Halyard Products Range Halyard Products Range

Wire Reinforced Standard Range Exhaust Hose - Standard Products



'	Wire Reinforced Standard Range Exhaust Hose 'ETNA' Temperature rating - Continuous: 100°C												
Part No.	Deference	1.1	D.	Bend Radius	Max. Length	Hose							
Part No.	Reference	inch mm		mm	metres	Clamp							
H000518	2HS32	11/4	32	130	60	H000505							
H000519	2HS38	11/2	38	150	60	H000507							
H000520	2HS41	15/8	41	160	60	H000507							
H000521	2HS45	13/4	45	170	60	H000509							
H000522	2HS51	2	51	180	60	H000510							
H000523	2HS60	23/8	60	190	60	H000512							
H000524	2HS63	21/2	63	200	60	H000512							
H000525	2HS76	3	76	250	60	H000514							
H013763	2HS90	31/2	89	330	60	H000517							
H013764	2HS102	4	102	410	60	H024246							
H018617	2HS127	5	127	560	60	H024249							
H019437	2HS152	6	152	680	12	H024250							
H019438	2HS203	8	203	995	12	H024252							
			Wired t	o end only									



Wire Reinforced 'HalFlex' Ultra Flexible Exhaust Hose - Standard Products



	Wire Reinforced 'HalFlex' Ultra Flexible Exhaust Hose Temperature rating - Continuous: 100°C												
		I.D. inch mm		Bend Radius	Max. Length	Hose Clamps	Hose Clamp						
Part No.	Reference			mm	metres	Wired to End	Soft Cuffed Ends						
H022112	HFX38	11/2	38	75	9	H000508	H000507						
H022113	HFX41	1 ⁵ /8	41	85	6	H000509	H000507						
H022114	HFX45	13/4	45	90	10	H000510	H000509						
H022115	HFX51	2	51	105	10	H000511	H000510						
H022116	HFX60	23/8	60	120	10	H000513	H000512						
H022117	HFX63	21/2	63.5	125	6	H000513	H000513						
H022118	HFX76	3	76	175	10	H000516	H000515						
H022119	HFX89	31/2	89	205	10	H000517	H000517						
H022120	HFX102	4	102	235	10	H024247	H024246						
H022121	HFX113	$4^{1}/_{2}$	113	260	9	H024248	H000485						
H022122	HFX127	5	127	295	10	H000487	H024249						
H022123	HFX152	6	152	350	10	H024251	H024250						
H022124	HFX177	7	177	410	6	H000491	H000491						
H022125	HFX203	8	203	470	6	H024252	H024252						
H022126	HFX254	10	254	700	6	H024253	H024253						
H022127	HFX305	12	305	840	6	H024254	H024254						
H022128	HFX356	14	356	N/A	4.5	H024255	H024255						
H022129	HFX406	16	406	N/A	3.5	H018627	H018627						
H022130	H022130 HFX458 18 458 N/A 2 H017611 H019339												
	Available a	s wired	to en	d or with soft c	uffed ends to a	aid hose clamp	ing						



Wire Reinforced 'HalFlex-HT' High Temperature Hose - Standard Products



Wire Reinforced 'HalFlex-HT' High Temperature Hose Temperature rating - Continuous: 140°C									
	I.D).	Bend Radius	Max. Length	Hose Clamps	Hose Clamp		
Part No.	Reference	inch	mm	mm	metres	Wired to End	Soft Cuffed Ends		
H022131	HFXHT38	11/2	38	75	6	H000508	H000507		
H022132	HFXHT41	15/8	41	85	5	H000509	H000508		
H022133	HFXHT45	13/4	45	90	6	H000510	H000509		
H022134	HFXHT51	2	51	105	6	H000511	H000510		
H022135	HFXHT60	23/8	60	120	6	H000513	H000512		
H022136	HFXHT63	21/2	63.5	125	6	H000513	H000513		
H022137	HFXHT76	3	76	175	6	H000515	H000515		
H022138	HFXHT89	31/2	89	205	6	H000517	H000517		
H022139	HFXHT102	4	102	235	6	H024247	H024246		
H022140	HFXHT113	41/2	114	260	6	H024248	H000485		
H022141	HFXHT127	5	127	295	6	H000487	H024249		
H022142	HFXHT152	6	152	350	6	H024251	H024250		
H022143	HFXHT177	7	178	410	5	H000491	H000491		
H022144	HFXHT203	8	203	470	5	H024252	H024252		
H022145	HFXHT254	10	254	700	5	H024253	H024253		
H022146	HFXHT305	12	305	840	5	H024254	H024254		
H022147	HFXHT358	14	356	N/A	4	H024255	H024255		
H022148	HFXHT406	16	406	N/A	3	H018627	H018627		
H022149	HFXHT458	18	458	N/A	1.5	H017611	H019339		
	Available as	s wired	to enc	or with soft co	uffed ends to a	id hose clampi	ng		

AN ANTALON SERVICE SER

Lloyd's approval. Please contact Halyard for further information

Silicone Exhaust Hose - Standard Products

Silicone Exhaust Hose Temperature rating - Continuous: 180°C								
Part No.	Reference	I.I	D.	Max. Length	Llega Clama			
Part No.	helerence	inch	mm	metres	Hose Clamp			
H022160	SS38	11/2	38	6	H000508			
H022161	SS41	15/8	41	5	H000508			
H022162	SS45	13/4	45	6	H000509			
H022163	SS51	2	51	6	H000511			
H022164	SS60	23/2	60	6	H000513			
H022165	SS63	21/2	63.5	6	H000513			
H022166	SS76	3	76	6	H000515			
H022167	SS89	31/2	89	6	H000517			
H022168	SS102	4	102	6	H024247			
H022169	SS113	41/2	114	6	H024248			
H022170	SS127	5	127	6	H000487			
H022171	SS152	6	152	6	H024248			
H022172	SS177	7	178	5	H000491			
H022173	SS203	8	203	5	H024252			
H022174	SS254	10	254	5	H024253			
H022175	SS305	12	305	5	H024254			
H022176	SS356	14	356	4	H024255			
H022177	SS406	16	406	3	H018627			
H022178	SS456	18	456	1.5	H017611			

This product is designed for short flexible connections only – Please contact Halyard for further information

Options

- Extremely high temperature Nomex rated to 260°C
- Alternative sizes and configurations



Wire Reinforced Silicone Exhaust Hose - Standard Products



Wire Reinforced Silicone Exhaust Hose Temperature rating - Continuous: 180°C								
Part No.	Reference	1.1	D.	Max. Length	Hose Clamp			
Fait No.	neierence	inch	mm	metres	Hose Clamp			
H022181	SW38	11/2	38	6	H000509			
H022182	SW41	15/8	41	5	H000510			
H022183	SW45	13/4	45	6	H000511			
H022184	SW51	2	51	6	H000512			
H022185	SW60	23/8	60	6	H000514			
H022186	SW63	21/2	63.5	6	H000510			
H022187	SW76	3	76	6	H000516			
H022188	SW89	31/2	89	6	H000517			
H022189	SW102	4	102	6	H000485			
H022190	SW113	41/2	114	6	H000486			
H022191	SW127	5	127	6	H000487			
H022192	SW152	6	152	6	H000490			
H022193	SW177	7	178	5	H000492			
H022194	SW203	8	203	5	H000494			
H022195	SW254	10	254	5	H012776			
H022196	SW305	12	305	5	H019846			
H022197	SW356	14	356	4	H019851			
H022198	SW406	16	406	3	H018627			
H022199	SW456	18	456	1.5	H017611			



Note: Lloyd's approval is not applicable for Halyard Wired Reinforced Silicone Exhaust Hose ID sizes SW254 – SW456

Silicone Flexible Bellows - Standard Products



Silicone Flexible Bellows Temperature rating - Continuous: 180°C								
Part No.	Reference	I.D.		Length Overall	Single/Dual Hump	Hose Clamp		
		inch	mm	mm	Пипр			
H003300	CB1063	21/2	63	150	Single	H000513		
H003301	CB1076	3	76	170	Single	H000515		
H003302	CB1090	31/2	89	220	Single	H000517		
H003303	CB1102	4	102	220	Single	H024247		
H003304	CB1127	5	127	220	Single	H000487		
H003305	CB1152	6	152	220	Single	H024251		
H003306	CB1178	7	178	220	Single	H000491		
H003307	CB1203	8	203	220	Single	H024252		
H003308	CB1254	10	254	250	Single	H024253		
H003309	CB1305	12	305	300	Single	H024254		
H010251	CB1356	14	356	300	Single	H024255		
H017078	CB1406	16	406	300	Single	H018627		
H003310	CB2102	4	102	350	Double	H024247		
H003311	CB2152	6	152	350	Double	H024251		
H003312	CB2178	7	178	350	Double	H000491		
H003313	CB2203	8	203	350	Double	H024252		
H003314	CB2254	10	254	350	Double	H024253		
H003315	CB2305	12	305	350	Double	H024254		
H003316	CB2324	123/4	324	350	Double	H010478		
H003317	CB2355	14	356	400	Double	H024255		
H003202	CB2406	16	406	400	Double	H018627		

Options

- Extremely high temperature Nomex rated to 260°C
- Large range of alternative sizes also available
- Variants with different end to end diameters available




Bronze Siphon Breakers

This range of siphon breakers are made from corrosion resistant bronze.

The siphon permits air to enter, but does not permit air and odours to escape. The cap is threaded $^{1}/_{2}$ " NPT to accept a barb fitting to facilitate overboard venting. Overboard venting is required if used in an exhaust system.

Vented loops assure clog-free anti-siphon protection for sanitation or engine exhaust systems. The oversized vent valve can easily be removed for inspection or cleaning.




	Bronze Siphon Breakers									
Part No.	Reference	Description	Hose I.D.		A Mour	A Mount Holes		eight	C Hose Centres	
Part No.	neierence	Description	mm	inch	mm	inch	mm	inch	mm	inch
H021061	SB050	Siphon breaker 1/2"	13	1/2	120	43/4	109	137/64	76	3
H021062	SB0750	Siphon breaker 3/4"	19	3/4	120	43/4	109	137/64	76	3
H018133	SB100	Siphon breaker 1"	25	1	120	43/4	109	1 ³⁷ / ₆₄	76	3
H018134	SB150	Siphon breaker 1 1/2"	38	11/2	170	611/16	109	137/64	101	4
H021063	SB200	Siphon breaker 2"	51	2	185	79/32	137	525/64	114	41/2
H018171	N/A	90 degree hose barb for o	90 degree hose barb for overboard venting							

Separator Non-Return Valves

Designed for use where there is a risk of water being pushed back up the separator drain or other vessel equipment.

Separator Non-Return Valves									
Part No. Reference Inlet/Outlet Dia. inch Dia. mm									
H008743	NRV38	11/2	38						
H008744	NRV50	2	51						





Note: When part of an overboard system valves must not be installed below the waterline.

Stainless Steel Hose Clamps

Stainless Steel Hose Clamps							
Part No.	Reference	Hose O.D. Range - mm	Material				
H000501	HCSS3134	31-34	W4 S/S				
H000502	HCSS3740	37-40	W4 S/S				
H000505	HCSS4043	40-43	W4 S/S				
H000506	HCSS4347	43-47	W4 S/S				
H000507	HCSS4751	47-51	W4 S/S				
H000508	HCSS5155	51-55	W4 S/S				
H000509	HCSS5559	55-59	W4 S/S				
H000510	HCSS5963	59-63	W4 S/S				
H000511	HCSS6368	63-68	W4 S/S				
H000512	HCSS6873	68-73	W4 S/S				
H000513	HCSS7379	73-79	W4 S/S				
H000514	HCSS7985	79-85	W4 S/S				
H000515	HCSS8591	85-91	W4 S/S				
H000516	HCSS9197	91-97	W4 S/S				
H000517	HCSS97104	97-104	W4 S/S				
H024246	HCSS109117	109-117	300SS				
H024247	HCSS114122	114-122	300SS				
H000485	HCSS121130	121-130	W4 S/S				
H024248	HCSS126133	126-133	300SS				
H000486	HCSS131139	131-139	W4 S/S				
H024249	HCSS134142	134-142	300SS				
H000487	HCSS140150	140-150	W4 S/S				
H000488	HCSS150162	150-162	W4 S/S				
H024250	HCSS159167	159-167	300SS				
H024251	HCSS165173	165-173	300SS				
H000490	HCSS174187	174-187	W4 S/S				
H000491	HCSS188200	188-200	W4 S/S				
H000492	HCSS201213	201-213	W4 S/S				
H024252	HCSS211227	211-227	300SS				
H000494	HCSS226239	226-239	W4 S/S				
H000495	HCSS239252	239-252	W4 S/S				
H024253	HCSS262278	262-278	300SS				
H012776	HCSS278291	278-291	W4 S/S				
H024254	HCSS316332	316-332	300SS				
H024255	HCSS367383	367-383	300SS				
H015470	HCSS395408	395-408	W4 S/S				
	Stainless Steel D	ouble Bolt Clamps					
H019846	HCSS300324	300-324	W4 S/S				
H000500	HCSS312336	312-336	W4 S/S				
H019851	HCSS361387	361-387	W4 S/S				
H018627	HCSS413439	413-439	W4 S/S				

Note:

Please contact Halyard or your local distributor or dealer to verify correct clamp size to suit your Halyard hose, connector or bellows.

316L Stainless Steel Through-Hull Exhaust Outlets

	Stainless steel through-hull exhaust outlets														
Legacy			Ą	B O.D.	С	E	Fixing		No. of		Bolting			/ Part Numl	pers
Part Number	Ref.	inch	mm	mm	mm	mm	PCD F	mm/ Screw	Fixing Holes	Material	Flange Y/N	Weight	No Flap or Cowl	Flap	Flap & Cowl
H002524	HF004	13/4	45	84	80	26	65	7 / M6	3	NBR	N	0.6	H027537	H027538	H027539
H002525	HF005	2	51	104	80	27	80	7 / M6	3	NBR	N	0.7	H027540	H027541	H027542
H002526	HF006	23/8	60	114	87	29	90	7 / M6	3	NBR	N	1	H027543	H027544	H027545
H002527	HF010	3	76	129	95	32	102	7 / M6	3	NBR	N	1.2	H027546	H027547	H027548
H002528	HF015	11/4	89	141	110	34	118	7 / M6	4	NBR	Y	1.9	H027549	H027550	H027551
H002529	HF020	4	102	154	123	36	130	7 / M6	4	NBR	Υ	2.1	H027552	H027553	H027554
N/A	HF023	41/2	114	204	178	84	165	7 / M6	6	SS	Y	4.5	H027555	H027556	H027557
H002531	HF025	5	127	204	178	87	165	7 / M6	6	SS	Y	4.7	H027558	H027559	H027560
H002532	HF030	6	152	254	178	94	190	7 / M6	6	SS	Y	6.1	H027561	H027562	H027563
H002533	HF035	8	203	304	254	107	240	7 / M6	6	SS	Y	9.5	H027564	H027565	H027566
N/A	HF040	10	254	355	254	121	295	7 / M6	8	SS	Y	13	H027567	H027568	H027569
N/A	HF045	12	305	406	254	135	350	7 / M6	8	SS	Y	17	H027570	H027571	H027572
	*NBR = Nitrile Rubber, SS = 316L Stainless Steel														

With Nitrile Flap & Cowl - Up To 4" diameter



Without Flap or Cowl




With 316L Flap



With 316L Flap & Cowl





Sizes from 127mm (5")

Alternative sizes on request | Standard electro-polished finish | Optional mirror-polished finish

38 Halyard Products Range Halyard Products Range 39

Fabricated Manifolds & Connectors

316L Stainless Steel Deck Drain Manifolds

316L stainless steel manifolds available in $^{3}/_{8}$ " to 4" connections.


- Manufactured to customer specification
- Optional mounting brackets
- Electro polished
- Price on application



316L Stainless Steel Branch Connectors

316L stainless steel branch connectors made to order.

- Electro polished
- Price on application
- Alternative sizes available on request

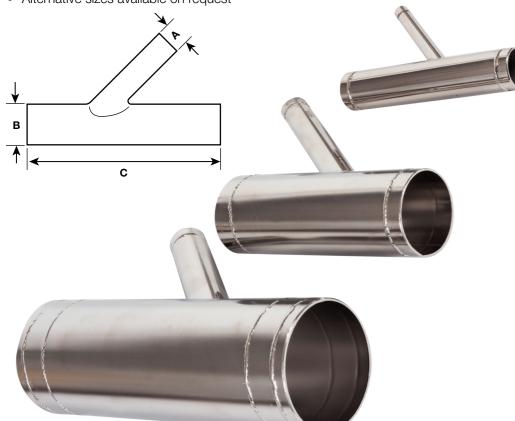


Inches BSP							
1/2	3/4	5					
1/2	1	5					
1/2	11/4	6					
1/2	11/2	6					
1/2	2	7					
1/2	21/2	8					
1/2	3	10					
3/4	3/4	5					
3/4	1	5					
3/4	11/2	6					
3/4	11/2	6					
3/4	2	7					
3/4	21/2	8					
3/4	3	10					
1	1	5					
1	11/4	6					
1	11/2	6					
1	2	7					
1	21/2	8					
1	3	10					
1.25	11/4	6					
1.25	11/2	6					
1.25	2	7					
1.25	21/2	8					
1.25	3	10					
11/2	11/2	7					
11/2	2	8					
11/2	21/2	8					
$1^{1/2}$	3	10					
2	2	8					
2	21/2	10					
2	3	10					
21/2	21/2	8					
$2^{1/2}$	3	10					
3	3	10					

A B C

316L Stainless Steel Y Connectors

316L stainless steel Y hose connectors made to order.

- Electro polished
- Ten off minimum order
- Price on application
- Alternative sizes available on request






Α	В
Inc	ches
1/2	1/2
1/2	3/4
1/2	1
3/4	3/4
1	1
1	11/4
1	1/2
1 ¹ / ₄	11/4
11/4	11/4
11/2	11/4
11/2	2
2	2
2	21/2
21/2	21/2

316L Stainless Steel In-line Reducers

A range of 316L stainless steel in-line reducers made to order.

- Electro polished
- Ten off minimum order
- Price on application
- Alternative sizes available on request





Α	В	С						
	Inches							
3/4	1	5						
1	11/2	6						
11/2	2	7						
2	21/2	8						
21/2	3	10						
3	31/2	10						
31/2	4	10						






Antivibration Mounts, Flanged Bellows & **Bulkhead Penetrations**

- Significant reduction of vibration into the vessel structure from the engine including through the exhaust system
- Specification and design support to ensure correctly specified and efficient systems
- Over 40 years of experience in vibration, noise, and shock control

Halyard is a preferred supplier for **Rubber Design products**





Mounts, Bellows & **Bulkhead Penetrations**



Hanging/Standing Fixed Point and Stabiliser Mounts

Rubber Design are global leaders in noise, vibration and shock control solutions for the worldwide marine market. Halyard is an authorised reseller of Rubber Design antivibration exhaust equipment. Halyard have a long-standing partnership with Rubber Design utilizing their products in Halyard exhaust systems and other applications. We can also offer these as standalone products to meet customer requirements.

Noise and Vibration Reduction

A significant reduction in the radiated noise and vibrations can be achieved by using rubber-metal elements between the exhaust gas system and ships structure. This is because the transmission speed of sound through rubber is only 45 to 90m/ sec, while it is around 5000m/sec through steel. With a smart design and using rubber-metal elements a reduction of 8 to 10dB (A) can be obtained across the majority of the frequency range of 63 to 4000Hz.

Types of Mounting

For exhaust systems, two basic types of mountings are used, hanging/standing fixed support mountings and stabiliser mountings. The fixed support mountings take the static and dynamic forces and determine the direction of the expansion in the exhaust system. The stabiliser mountings guides the thermal expansion caused by the high temperature of the exhaust to the applied stainless steel bellows in the exhaust system. the stabiliser mountings also support the weight of the pipe.

Thermal Insulation

It is important to protect the rubber from the high temperature of the exhaust system. To obtain a long life time of the mountings the temperature must be below 80°C. To achieve this our fixed supports are equipped with suitable thermal insulators. By using this material, as well as providing a minimum air gap of 25mm between the exhaust mounting and the outside exhaust insulation, the temperature can be controlled to around 50°C. The above is applicable for the flexible fixed points, for the stabilisers the thermal insulation is attained by the length of the threaded rod. For more details refer to the installation instructions.

Mounting Selection

Generally these products are part of a complete system, therefore it is advisable to seek expert advice from our engineering team. Halyard, with the support from Rubber Design, can take total responsibility for the complete design including the vibration calculations of the flexible suspended exhaust systems. Besides flexible exhaust supports, Rubber Design also produce stainless steel bellows, flexible fire proof and/or watertight bulkhead penetrations, funnel deck passages. All according to the latest design standards and regulations. With the best design and products a maximum reduction of vibrations and life span of your exhaust gas system will be achieved.











Mounts, Bellows & Bulkhead Penetrations

Fixed Point Mounts

Hanging fixed points are mainly used to support horizontal exhaust pipes, isolate the engine vibrations and control the dynamic forces which occur while the vessel is in operation. Besides this they determine the direction of the expansion due to thermal growth of the exhaust pipe. The fixed points can also be installed close to the engine outlet to avoid thermal expansion from the exhaust system towards the engine bellows. This to protect the turbo against external forces from the exhaust system.








					Fixed Poi	nt Mounts					
Reference	Α	В	С	D	E	F	G	Isolation	Weight	Fz Max	Hardness
neielelice	mm	mm	mm	mm	mm	Max. mm	G	Plate	kg	N	°S h. A
RD101	75	40	95	50	50	15	M10	35x35x12	0.9	500	45
וטוטח	73	40	95	30	30	15	IVITO	33X33X12	0.9	900	60
										2300	60
RD251	100	55	110	65	92	15	M12	40x40x12	2.1	4200	70
										4300	45
										4000	45
RD501	120	68	135	80	97	12	M16	50x50x12	3.3	6200	60
										8750	70
RD1001	150	80	150	100	115	15	M24	60x60x12	7.3	6500	45
וטטועח	150	00	130	100	113	15	IVIZ4	00000012	1.3	9000	65
RD2001	200	110	180	125	110	15	M30	70x70x16	10.9	10000	45
ND2001	200	110	100	123	110	15	IVIOU	70070010	10.9	15000	65
RD3001	200	110	230	125	155	20	M36	80x80x16	17.0	16000	45
1100001	200	110	230	123	133	20	IVIOU	000000000000000000000000000000000000000	17.0	36000	65



Stabiliser Mounts

Stabilisers are mainly used to support horizontal exhaust pipes as well as stabilizing the vertical pipes and components like silencers, aftertreatment SCR or DPF units, etc. They isolate the engine vibrations and control the dynamic forces which occur while the vessel is in operation. Besides this they guide the direction of the expansion due to thermal growth of the exhaust system.



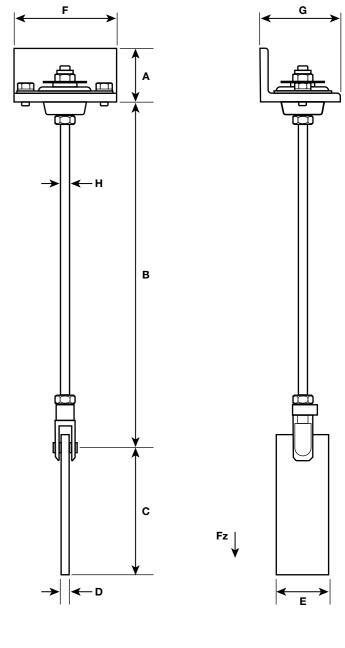

					Stabilise	r Mounts					
Reference	Α	В	С	D	E	F	G	Н	Weight	Fz Max	Hardness
neierence	mm	mm	mm	mm	mm	mm	G	П	kg	N	°S h. A
RD101	50	320	118	8	50	95	75	M10	1.4	500	45
וטוטו	30	320	110	0	30	95	13	IVITO	1.4	900	60
RD251D	65	300	135	10	60	100	100	M12	2.6	1750	45
NDZJID	05	300	100	10	00	100	100	IVITZ	2.0	3000	60
RD501D	80	470	130	15	70	120	120	M16	5.0	3000	45
חוטטטוט	00	470	130	13	70	120	120	IVITO	3.0	4500	60
RD1001	100	530	115	10	40	150	150	M24	9.7	6500	45
וטטועא	100	550	113	10	40	150	150	IVIZ4	9.7	9000	65
RD2001	100	530	130	10	50	180	200	M30	14.6	10000	45
ND2001	100	330	130	10	30	100	200	IVIOU	14.0	15000	65
RD3001	125	555	215	15	65	230	200	M36	29.9	16000	45
ND3001	123	333	213	13	05	230	200	IVIOU	29.9	36000	65

Mounts, Bellows & Bulkhead Penetrations


MP2 Series Compression Mounts


The MP-mountings (Multi Purpose) are developed to offer excellent passive and active vibration isolation for various applications.


Next to offering excellent isolation the MP-mountings internal deflection limiter avoids overload and allows use for mobile applications on for example trucks and ships. The geometry of the metal top offers protection to the natural rubber against oil and ozone. Also available in stainless steel.

Typical applications:

- Generators
- Engines
- Fans
- AC-units
- Cooling equipment
- Electro motors
- Cabinets

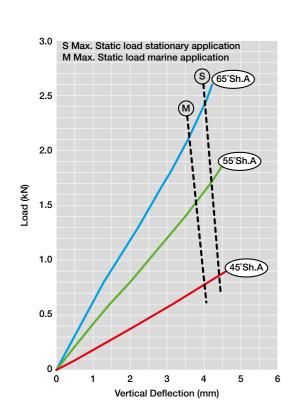

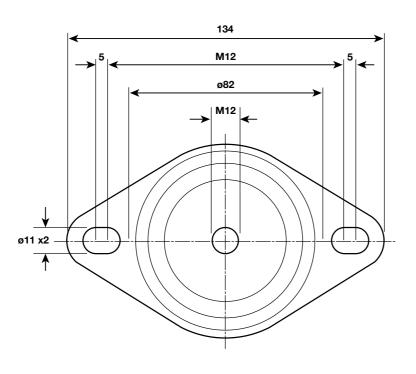



		MP2	Series		
Reference	Max. Load Marine	Max. Load Static	Max. Vertical Deflection Marine	Max. Vertical Deflection Static	Cz Stiffness
	kN	kN	mm	mm	N/mm
MP2-45	0.8	0.9	4.0	4.4	200
MP2-55	1.5	1.7	3.8	4.2	400
MP2-65	2.1	2.4	3.6	4.0	600



Flanged Rubber Bellows

Rubber Design rubber bellows red ring are made from EPDM rubber and provide resistance to water up to 90°C, however this is influenced by the working pressure.

Rubber bellows with flanges have a special flow assisting convoluted shape of the bellows which minimize detrimental turbulence of the medium and pressure loss. High tensile strength texture cord plies combined with proven synthetic rubber mixes guarantee maximum reliability and an extended working life.


The rubber bellows are produced with a vulcanized steel ring to guarantee a perfect sealing of the profiled sealing rings in the special chamber of the swivel flanges. Average installed insulation is about 25dB, a figure which is further improved by compressed installation.

Alternative specification bellows including yellow ring single and double are available, contact Halyard for details

Pressure

The maximum working pressure is 16Bar (10Bar*) with a test pressure of 25Bar and even a burst pressure of over 60Bar (30Bar*)

(*For bellows larger than NB150)

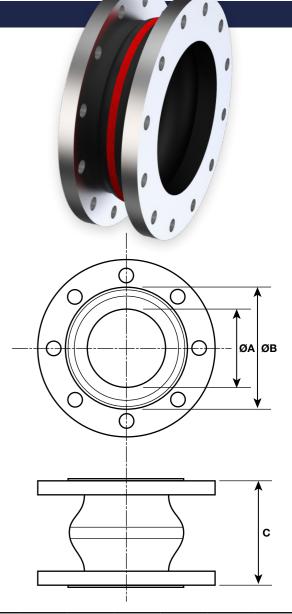

			1	A Red Ri	ng Flang	ed Rubbe	r Bellows					
Reference	ØA	ØВ	С	Ax	Lat.	Angle	Bellows Area	Weight		sure os)	Installatio	n Length
neierence	mm	mm	mm	mm	mm	Degrees	cm ²	kg	kPa	MPa	Min. mm	Max. mm
KR025R110A000	25	72	130	-30/+20	±20	±35	35	1.9	20	1.6	120	135
KR032R110A000	32	72	130	-30/+20	±20	±35	35	2.0	20	1.6	120	135
KR040R110A000	40	79	130	-30/+20	±20	±35	50	3.5	20	1.6	120	135
KR050R110A000	50	89	130	-30/+20	±20	±35	74	4.3	20	1.6	120	135
KR065R110A000	65	104	130	-30/+20	±20	±30	87	5.5	20	1.6	120	135
KR080R110A000	80	120	130	-30/+20	±20	±30	120	62	30	1.6	120	135
KR100R110A000	100	139	130	-30/+20	±20	±25	143	7.7	40	1.6	120	135
KR125R110A000	125	164	130	-30/+20	±20	±25	210	8.7	60	1.6	120	135
KR150R110A000	150	189	130	-30/+20	±20	±15	283	11.3	60	1.6	120	135
KR200R110A000	200	237	130	-30/+20	±20	±15	525	16.2	70	1.0	115	140
KR250R110A000	250	289	130	-30/+20	±20	±10	636	20.5	70	1.0	125	140
KR300R110A000	300	338	130	-30/+20	±20	±10	897	24.0	80	1.0	125	140
KR350R110A000	350	390	200	-30/+20	±20	±10	1290	34.0	80	1.0	190	210
KR400R110A000	400	455	200	-30/+20	±20	±10	1628	37.5	80	1.0	190	210
KR500R110A000	500	555	200	-30/+20	±20	±10	2546	47.0	80	1.0	190	210
Standard	flange ra	nge made	e of carbo	on steel S	235JR. d	rilled acco	ordina to I	DIN PN10	/16. elect	rolytic as	alvanised	

46 Halyard Products Range Halyard Products Range

Mounts, Bellows & Bulkhead Penetrations




Heat Reducing Bulkhead Penetration



Heat reducing penetrations are fixed penetrations designed to insulate the high exhaust temperature to bulkheads or decks. The complete assembled penetrations are made of carbon steel flanges and special asbestos free insulation material, ready for installation. Alternative materials for the carbon steel flanges can be supplied on request.

Flexible deck and bulkhead penetrations are also available, contact Halyard for details.

The penetrations are available as standard with the following dimensions.

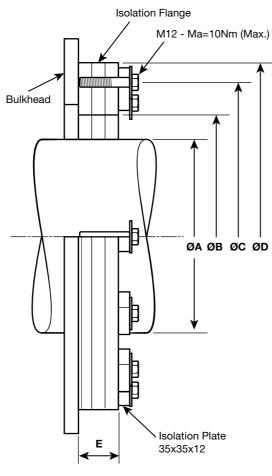

		Heat Red	lucing Bulkhead P	enetration		
Reference	ØA	ØB	ØС	ØD	E	Bolts
neierence	mm	mm	mm	mm	mm	Doils
50	25	72	130	-30/+20	±20	35
65	32	72	130	-30/+20	±20	35
80	40	79	130	-30/+20	±20	50
100	50	89	130	-30/+20	±20	74
125	65	104	130	-30/+20	±20	87
150	80	120	130	-30/+20	±20	120
175	100	139	130	-30/+20	±20	143
200	125	164	130	-30/+20	±20	210
250	150	189	130	-30/+20	±20	283
300	200	237	130	-30/+20	±20	525
350	250	289	130	-30/+20	±20	636
400	300	338	130	-30/+20	±20	897
450	350	390	200	-30/+20	±20	1290
Standar	d flange range mad	de of carbon steel S	S235JR, drilled acc	ording to DIN PN10	/16, electrolytic ga	alvanised

Other dimensions available on request

Bow Thruster Tube

GRP Tube For Bow Thrusters







Freeman Marine deliver reliability, safety and more features than any other manufacturer

Freeman Cast Hatches Attributes:

- Evenly spaced dogging arms exert uniform force on the cover plate.
- Handle position shows when dogging arms are engaged or disengaged.
- Handle is always attached. Hatch and handle fit flush with the deck with the handle in a recessed locked position.
- Watertight hatches, designed to seal up to 30' intermittent head, the double-sealing gasket seals tighter under pressure.
- Versatile installation, hatches can be in stalled in steel, aluminum, wood, or fibreglass decks.

- Complete units include aluminum or steel mounting rings for bolt-in or weld-in installations.
- Dogging mechanism assures smooth consistent action; no binding or jamming.
- Quick-acting dogging eliminates over or under tightening; hatch operates the same each time.
- Marine Classification Society Certifications

Halyard is the UK & Ireland **Distributor for Freeman Marine**

Cast Hatches



Approvals & Certificates - ISO 9001:2015

Quality Policy Statement

- Consistently meet or exceed our customer's expectation for product quality and performance.
- · Consistently meet or exceed our customer's expectation for product and service delivery.
- Continuously improve our processes and systems.
- Provide employee training to better serve our customers and to support personal growth.

Certificates and Acceptances

AdvanTec's Freeman cast hatch line has various approvals and certifications.

The hatches have been granted American Bureau of Shipping (ABS) Product Design Assessment Certification for 109 different models. Each of these models can be used on a number of ABS classed vessels in locations specified in the design assessment.

AdvanTec Marine constantly monitors maritime regulations, standards and classification society activities related to closure approvals.

AdvanTec Marine closures have received specific intended use acceptance by:

- ABS American Bureau of Shipping
- DNV Det Norske Veritas
- LR Lloyds Register of Shipping
- GL Germanisher Lloyds
- BV Bureau Veritas
- MCA Maritime Coastguard Agency
- RS Russian Maritime Register of shipping
- RINA RINA S.P.A., Italy
- CRS Croatian Registry of Shipping
- USCG US Coast Guard
- CCG Canadian Coast Guard (Transport Canada)
- ABYC American Boat & Yacht Council

ADVANTEC ADVANTAGE



3 YEAR HASSLE-FREE WE ARE PASSIONATE ABOUT DELIVERING RELIABLE **SOLUTIONS** SUPERIOR **QUALITY** WORLD-CLASS **SUPPORT**

Approvals at a glance

- ABS type approval, certificate no.13-HS1082451-PDA
- · Lloyd's Register type approval certificate no. 03/00088(E3) & 9/60003(E1)
- . U.S. Coast Guard, CE, ISO-12216 compliant



Approvals have been awarded and may be obtained for specific intended uses.

AdvanTec Cast Hatches are currently in use on Coast Guard vessels and Naval craft of all

AdvanTec Marine can assist with specific intended use applications.



Over 350 self righting vessels 100% completely outfitted with AdvanTec hatches, doors, windows & portlights. The people you trust, trust AdvanTec Marine.

Our Warranty

All Non-Powered Equipment:

• Platinum Warranty - 3 years from date of shipment

All Powered Equipment:

- Standard Warranty 2 years from date of shipment
- 1 year extension Onsite commissioning required by AdvanTec Marine or certified technician

Scan for more information and the full range of available products





AdvanTed Marine

Service, Value and Experience





Lift Out

Surface Hinges

Freeman Cast Hatches Attributes

- Evenly spaced dog arms exert uniform force on the cover plate.
- Handle position shows when dog arms are engaged or disengaged.
- Handle is always attached. Hatch and handle fit flush with the deck with the handle in a recessed locked position.
- Watertight hatches, designed to seal up to 30' intermittent head, the double-sealing gasket seals tighter under pressure.
- Versatile installation, hatches can be installed in steel, aluminium, wood, or fibreglass decks.
- Complete units include aluminium or steel mounting rings for bolt-in or weld-in installations.
- Dog mechanism assures smooth consistent action; no binding or jamming.
- Quick-acting dog eliminates over or under tightening; hatch operates the same each time.



• Concealed Yoke Hinge (Optional, selected models)

Freeman Hatches have more quick-acting flush hatch experience, models and features than any manufacturer.

AdvanTec Marine's Freeman hatches are used on a wide variety of fishing boats, tugs, barges, research vessels, offshore tenders, rescue craft and other workboats. The Freeman hatch is designed for new boats, or replacing other hatches in standard openings, or for improving existing craft.


The hatches are fast acting and easy to use. Simply grasp the handle and pull, the shaft slides into place, and with less than a quarter turn, completely disengages the locking mechanism. The dogs and linked handle do the work smoothly in just a second.

Our easy lift system allows simple removal. With the locking mechanism disengaged, the hatch is resting on the deck ring and can be lifted out with one hand.

Hinged Hatches

Close-up view of standard

For hinged models the unique hinging device allows the hatch to be opened more than 180° and "floats" when the hatch is closed to facilitate a tighter seal. Round hatches 18" and larger, and all oval and square hatches with aluminium covers are available hinged from the factory.

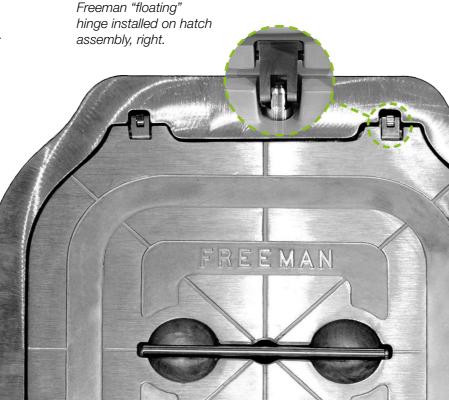

Quality and Capability

Two Important Features Distinguish the Freeman Cast Hatch from Other Designs


- Built in T-Handle
- Easy Operating Dogging Mechanism

The standard pocketed, stainless steel T-handle is built in, permanently part of the hatch. Grasp the handle and pull, the shaft slides up into place, and with less than a quarter of a turn the locking mechanism completely disengages. The alignment of the handle shows when dog arms are engaged or disengaged.

Evenly spaced dog arms (either 3, 4 or 8 depending on size of hatch) exert uniform sealing pressure on the cover plate. The unique design, fit, and adjustability of Freeman's dog mechanism assure smooth, consistent action; no binding or jamming of parts.

- As hub rotates a cam exponentially increases force at the opposite end of the dog arm
- Each dog is adjustable to insure equal tension on the gasket sealing surface

Typical Hatch Cover Assembly

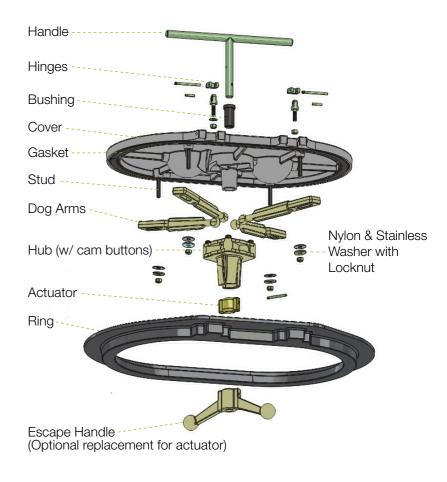

Knife Edge or Compression Sealing

Compression Seal 2400 Series Hatches

These hatches have easy-to-clean spigots, feature long gasket life, and are economical to purchase.

- Aluminium Deck Rings are intended to be weld installed into aluminium decks and bolt installed into other deck materials.
- Steel Deck Rings are to be weld installed into steel decks only.
- Watertight seal to 30 foot intermittent head, continuous 10 foot head top-loaded pressure (on properly installed and adjusted hatch assemblies).





A-C Aluminium Deck Ring with Compression Seal with

S-C Steel Deck Ring with Compression Seal

Knife-edge Seal 2400 Series Hatches

These hatches feature a coaming with drain gutter and an aggressive sealing rim edge. A drain fitting can be installed to minimize water from entering enclosure when hatch is initially opened.

- Aluminium Deck Rings are intended to be weld installed into aluminium decks and bolt installed into other deck materials.
- Steel Deck Rings are to be weld installed into steel decks only.





A-K Aluminium Deck Ring with Knife Edge Seal

S-K Steel Deck Ring with Knife Edge Seal



Oval Cast Hatches









15"x 24" Oval lift-out, Aluminium ring

15" x 24" Oval hinged, Steel ring, Inside view


15"x 24" Oval lift-out, Steel ring


15"x 24" Oval hinged, Steel ring

						С	ast Alun	ninium H	atches -	Ova	al									
						ı	Hatch Dime	nsions						Cove	r Dimensio	ns			Asse	embly
Part No.	Size	Style	Rina	Clear 0	pening	Rough 0	pening*	Ov	erall (Cove	r + Ri	ing)		Mat	erial	Ove	rall	Mecha	anism	We	ight
Tart No.	Inch	Style	iiiig	A (inch)	A (mm)	B (inch)	B (mm)	C (inch)	C (mm)	D	E	F	Metal	Thick	Inch	mm	Metal	Dog Qty.	lbs	kg
2431-0002	12x18	Lift-Out	A-C	12.0x18.0	305x457	15.0x21.0	381x533	18.8x24.8	478x630	1.5	0.31	NA	А	0.28	14.1x20.3	358x516	AA	4	29	13.2
2431-0003	12x18	Lift-Out	S-C	12.0x18.0	305x457	14.8x19.8	376x503	14.8x19.8	376x503	1.3	0.25	NA	А	0.29	14.1x20.3	358x516	AA	4	30	13.6
2471-0002	12x18	Hinged	A-C	12.0x18.0	305x457	15.0x21.0	381x533	18.8x24.8	478x630	1.5	0.31	NA	А	0.28	14.1x20.3	358x516	AA	4	31	14.1
2471-0003	12x18	Hinged	S-C	12.0x18.0	305x457	14.8x20.8	376x503	17.2x20.8	437x529	1.3	0.25	NA	Α	0.29	14.1x20.3	358x516	AA	4	31	14.1
2433-0002	15x24	Lift-Out	A-C	14. 8x23.7	376x603	17.7x26.7	450x677	21.3x30.3	541x770	1.5	0.25	NA	А	0.22	16.3x25.9	414x658	AA	4	35	15.9
2433-0003	15x24	Lift-Out	S-C	14. 8x23.7	376x603	17.5x26.5	445x673	17.5x26.5	445x673	1.3	0.25	NA	Α	0.22	16.3x25.9	414x658	AA	4	37	16.8
2434-0002	15x24	Lift-Out	A-K	15.2x24.2	386x615	17.9x26.9	455x684	21.0x30.0	533x762	1.6	0.31	0.6	А	0.21	17.7x26.7	450x678	AA	4	35	15.9
2434-0003	15x24	Lift-Out	S-K	15.2x24.2	386x615	17.9x26.7	454x678	17.9x26.7	454x678	2.5	0.31	0.25	А	0.21	17.6x26.4	447x671	AA	4	54	24.5
2473-0002	15x24	Hinged	A-C	14.6x23.5	371x597	17.6x26.5	447x673	21.6x30.5	549x775	1.5	0.31	NA	А	0.2	16.1x25.7	409x653	AA	4	37	16.8
2473-0003	15x24	Hinged	S-C	14.6x23.5	371x597	17.6x26.5	440x670	19.7x26.5	500x673	1.3	0.31	0.25	А	0.2	16.1x25.7	409x653	AA	4	38	17.2
2474-0002	15x24	Hinged	A-K	15.2x24.2	388x615	17.2x26.2	437x665	21.0x30.0	533x762	1.6	0.31	0.6	Α	0.21	17.4x26.3	442x668	AA	4	35	15.9
2474-0003	15x24	Hinged	S-K	15.2x24.2	388x615	20.1x26.7	454x678	20.1x26.7	510x678	2.5	0.31	0.25	Α	0.21	17.0x26.1	432x668	AA	4	60	27.2
2483-0107	15x24	Lift-Out	S-C	15.1x24.1	384x613	16.8x25.6	427x650	16.8x25.6	427x650	1.5	0.25	NA	DI	0.38	17.0x26.1	432x668	AA	4	85	28.6
2435-0002	19x26	Lift-Out	A-K	19.2x26.2	488x665	21.2x28.2	538x716	25.0x32.0	635x813	1.6	0.31	0.6	А	0.29	21.5x28.4	546x721	AA	4	43	19.5
2435-0003	19x26	Lift-Out	S-K	19.2x26.2	488x665	21.7x28.7	551x729	21.7x28.7	551x729	2.5	0.31	0.25	А	0.29	21.3x28.4	546x721	AA	4	61	27.7
2475-0002	19x26	Hinged	A-K	19.2x26.2	488x665	21.2x28.2	538x716	27.2x32.4	691x823	1.6	0.31	0.6	А	0.29	21.3x28.4	546x721	AA	4	44	20
2475-0003	19x26	Hinged	S-K	19.2x26.2	488x665	24.0x28.8	610x732	24.0x28.8	610x732	2.5	0.31	0.25	А	0.29	21.3x28.4	546x721	AA	4	67	30

AA - Aluminium Alloy SS - Stainless Steel DI - Ductile Iron (see loading limits page) *Rough opening dimensions do not include hinge pockets


A-K Aluminium Deck Ring with Knife Edge Seal







S-C Steel Deck Ring with Compression Seal



-Rough Opening & Ring OD

Round Cast Hatches










30" Round lift-out, steel ring

8" Round lift-out, aluminium ring

18" Round lift-out, steel ring

20" Round hinged, aluminium ring







S-C Steel deck ring with compression seal



A-K Aluminium deck ring with knife edge seal

S-K Steel deck ring with knife edge seal

							Cas	t Alum	inium	Hatch	nes - R	ound								
							Hatc	h Dimen	sions					Cove	r Dimensio	ns			Λοοι	embly
Part No.	Size Inch	Style	Ring	Clear 0)pening	Roi Oper	ıgh ning*		Overal	(Cover	+ Ring)		Ma	terial	Ove	erall	Mech	anism		ight
				A (inch)	A (mm)	B (inch)	B (mm)	C (inch)	C (mm)	D	E	F	Metal	Thick	Inch	mm	Metal	Dog Qty.	Ibs	kg
2401-0002	8"	Lift-Out	A-C	7.9	201	10.3	262	12.2	310	1.1	0.31	NA	AA	0.23	9.8	249	AA	3	8	3.6
2402-0002	12"	Lift-Out	A-C	11.9	302	14.8	376	17.4	442	1.3	0.31	NA	AA	0.19	13.9	353	AA	3	13	5.9
2402-0003	12"	Lift-Out	S-C	11.9	302	14.5	368	14.7	373	1.3	0.25	NA	AA	0.19	13.9	353	AA	3	16	7.3
2403-0002	15"	Lift-Out	A-C	15	381	17.8	452	12.5	546	1.3	0.31	NA	AA	0.29	17	432	AA	3	23	10.4
2403-0003	15"	Lift-Out	S-C	15	381	17.6	447	17.8	452	1.3	0.25	NA	AA	0.29	17	432	AA	3	26	11.8
2404-0002	18"	Lift-Out	A-C	18	457	20.9	530	24.5	622	1.4	0.31	NA	AA	0.26	20	508	AA	3	30	13.6
2404-0003	18"	Lift-Out	S-C	18	457	20.5	521	20.7	526	1.3	0.25	NA	AA	0.26	20	508	AA	3	32	14.5
2405-0002	18"	Lift-Out	A-K	18	457	20	508	24	607	1.5	0.38	0.8	AA	0.24	20.4	518	AA	3	38	17.2
2405-0003	18"	Lift-Out	S-K	18	457	20.6	523	21.1	536	2.5	0.31	1	AA	0.24	20.7	526	AA	3	36	16.3
2441-0002	18"	Hinged	A-C	18	457	25.7	653	24.5	622	1.6	0.27	NA	AA	0.38	20	508	AA	3	35	15.9
2441-0003	18"	Hinged	S-C	18	457	20.8	528	20.5	521	1.3	0.25	NA	AA	0.38	20	508	AA	3	38	17.2
2442-0002	18"	Hinged	A-K	18	457	20.7	527	24.5	607	1.5	0.38	0.8	AA	0.24	20.7	526	AA	3	39	17.7
2442-0003	18"	Hinged	S-K	18	457	20.6	523	22.9	580	2.5	0.31	1	AA	0.24	20.7	526	AA	3	42	19.1
2481-0107	18"	Lift-Out	S-C	18	457	20.5	521	20.3	516	1.5	0.25	NA	DI	0.41	19.9	505	SS	3	75	34
2406-0002	20"	Lift-Out	A-C	19.8	503	22.8	579	26.5	673	1.3	0.31	NA	AA	0.26	21.9	556	AA	4	36	16.3
2406-0003	20"	Lift-Out	S-C	19.8	503	22.4	569	22.3	566	1.3	0.25	NA	AA	0.26	21.9	556	AA	4	37	16.8
2407-0002	20"	Lift-Out	A-K	20	508	22	559	26	660	1.4	0.38	0.7	AA	0.35	21.9	556	AA	4	44	20
2407-0003	20"	Lift-Out	S-K	20	508	22.6	574	22.3	566	2.5	0.31	1	AA	0.35	21.6	549	AA	4	41	18.6
2443-0002	20"	Hinged	A-C	19.6	498	22.8	579	26.5	673	1.7	0.4	NA	AA	0.29	21.9	556	AA	4	44	20
2443-0003	20"	Hinged	S-C	19.6	498	22.4	569	22.1	561	1.3	0.25	NA	AA	0.29	21.9	556	AA	4	47	21.3
2444-0002	20"	Hinged	A-K	20	508	22	559	26	660	1.4	0.38	0.7	AA	0.35	22.4	569	AA	4	45	20.4

AA - Aluminium Alloy SS - Stainless Steel DI - Ductile Iron (see loading limits page) *Rough opening dimensions do not include hinge pockets

Continued >


54 Halyard Products Range Halyard Products Range 55






							Cas	t Alum	ninium	Hatch	nes - R	ound								
							Hatc	h Dimen	sions					Cove	r Dimension	ıs			Anne	
Part No.	Size Inch	Style	Ring	Clear 0	pening	Roi Oper			Overall	(Cover	+ Ring)		Mat	terial	Ove	rall	Mech	anism		embly eight
				A (inch)	A (mm)	B (inch)	B (mm)	C (inch)	C (mm)	D	E	F	Metal	Thick	Inch	mm	Metal	Dog Qty.	lbs	kg
2444-0003	20"	Hinged	S-K	20	508	22.6	579	22.9	582	2.5	0.31	1	AA	0.35	22.4	569	AA	4	48	21.8
2408-0002	22"	LIFT-OUT	A-C	22	559	24.8	630	28.5	724	1.6	0.31	NA	AA	0.31	24	610	AA	4	39	17.7
2408-0003	22"	LIFT-OUT	S-C	22	559	24.6	625	24.7	627	1.5	0.25	NA	AA	0.31	24	610	AA	4	40	18.1
2411-0002	24"	LIFT-OUT	A-C	23.3	592	26.6	676	30.5	775	1.4	0.31	NA	AA	0.37	25.8	665	AA	4	52	23.6
2411-0003	24"	LIFT-OUT	S-C	23.3	592	26.7	679	26.2	665	1.5	0.25	NA	AA	0.37	25.8	665	AA	4	54	24.5
2412-0002	24"	LIFT-OUT	A-K	24.1	612	27.1	689	30.6	778	1.6	0.38	0.6	AA	0.42	26.5	673	AA	4	65	29.5
2412-0003	24"	LIFT-OUT	S-K	24.1	612	26.7	678	26.5	673	2.5	0.31	1.0	AA	0.42	26.2	665	AA	4	59	28.8
2447-0002	24"	HINGED	A-C	23.4	594	26.4	671	30.5	775	1.7	0.4	NA	AA	0.41	25.8	665	AA	4	59	28.8
2447-0003	24"	HINGED	S-C	23.4	594	26.5	673	29.3	743	1.5	0.25	NA	AA	0.41	25.8	665	AA	4	62	28.1
2448-0002	24"	HINGED	A-K	24.1	612	26.1	663	30.6	777	1.6	0.38	0.6	AA	0.42	25.8	665	AA	4	66	29.9
2448-0003	24"	HINGED	S-K	24.1	612	26.7	678	26.3	668	2.5	0.31	1.0	AA	0.42	25.8	655	AA	4	65	29.5
2482-0107	24"	LIFT-OUT	S-C	23.3	592	26.5	673	26.3	668	1.5	0.25	NA	DI	0.36	25.8	655	AA	4	110	49.9
2415-0006	30"	LIFT-OUT	A-C	30	762	33.5	851	37.3	947	1.4	0.31	NA	AA	0.41	32.5	826	SS	4	81	36.7
2415-0007	30"	LIFT-OUT	S-C	30	762	33.3	846	33.1	841	1.3	0.25	NA	AA	0.39	32.5	826	SS	4	87	39.5
2452-0006	30"	HINGED	A-C	30	762	33.5	851	37.3	947	1.7	0.4	NA	AA	0.46	32.5	826	SS	4	82	37.2
2452-0007	30"	HINGED	S-C	30	762	33.3	846	33.1	841	1.5	0.25	NA	AA	0.49	32.5	826	SS	4	118	53.5

AA - Aluminium Alloy SS - Stainless Steel DI - Ductile Iron (see loading limits page) *Rough opening dimensions do not include hinge pockets





Rectangular/Square Cast Hatches









22" Square hinged, inside

27" Square hinged, steel ring

18 x 24" Rectangular hinged, aluminium ring

22" Square hinged, aluminium ring



A-C Aluminium deck ring with compression seal



S-C Steel deck ring with compression seal



A-K Aluminium deck ring with knife edge seal

S-K Steel deck ring

with knife edge seal

						Cas	t Alumin	ium Hatc	hes - Ro	und									\neg
								Hatch Dime	nsions						ver nsions	Mecha	nism		embly ight
Part No.	Size (inch)	Shape	Style	Ring	Clear 0	pening	Rough 0	pening*	0:	verall (Cove	r + Ri	ng)		Mat	terial			we	igiit
	(A (inch)	A (mm)	B (inch)	B (mm)	C (inch)	C (mm)	D	E	F	Metal	Thick	Metal	Dog Qty.	lbs	kg
2421-0002	18x24	R	Lift-Out	A-K	18.0x24.0	457x610	20.5x26.5	521x673	24.5x30.5	622x775	1.6	0.38	0.7	ALUM	0.2	AA	4	36	16.3
2421-0003	18x24	R	Lift-Out	S-K	18.0x24.0	457x610	20.5x26.5	521x673	20.4x26.4	518x671	2.5	0.31	0.9	ALUM	0.2	AA	4	61	27.7
2461-0002	18x24	R	Hinged	A-K	18.0x24.0	457x610	20.5x26.5	521x673	24.5x30.5	622x775	1.6	0.38	0.7	ALUM	0.2	AA	4	36	16.3
2461-0003	18x24	R	Hinged	S-K	18.0x24.0	457x610	20.5x26.4	521x673	22.8x26.3	579x668	2.5	0.31	0.9	ALUM	0.2	AA	4	61	27.7
2436-0002	24x28	R	Lift-Out	A-K	24.6x28.6	625x727	27.5x31.5	699x799	31.2x35.2	793x894	1.6	0.38	0.7	ALUM	0.2	AA	4	61	27
2436-0003	24x28	R	Lift-Out	S-K	24.6x28.6	625x727	27.5x31.5	699x799	27.1x31.1	688x790	2.5	0.31	0.9	ALUM	0.3	AA	4	83	37.4
2476-0002	24x28	R	Hinged	A-K	24.6x28.4	629x724	29.6x31.4	752x797	33.1x34.9	840x887	1.6	0.38	0.7	ALUM	0.3	AA	4	62	28.1
2476-0003	24x28	R	Hinged	S-K	24.6x28.4	629x724	29.6x31.4	752x797	29.6x33.1	752x841	2.5	0.31	0.9	ALUM	0.3	AA	4	84	37.9
2429-0002 0001**	30x36	R	Lift-Out	A-K	30.5x36.5	775x927	32.8x38.8	834x987	36.3x42.3	923x1075	2.5	0.31	0.9	ALUM	0.3	AA	8	102	46.3
2429-0003 0001**	30x36	R	Lift-Out	S-K	30.5x36.5	775x927	33.5x39.5	850x1003	33.5x39.5	850x1003	2.5	0.31	0.9	ALUM	0.3	AA	8	119	54
2469-0002 0001**	30x36	R	Hinged	A-K	30.6x36.6	776x930	32.8x38.8	834x987	38.1x42.3	967x1075	1.6	0.38	0.7	ALUM	0.3	AA	8	93	42.4
2469-0003 0001**	30x36	R	Hinged	S-K	30.0x36.0	762x914	33.5x39.5	850x1003	37.5x39.3	952x998	2.5	0.31	0.9	ALUM	0.3	AA	8	130	59
2422-0002	20x20	SQ	Lift-Out	A-K	20.3x20.3	517x517	22.8x22.8	579x579	26.8x26.8	681x681	1.6	0.38	0.7	ALUM	0.5	AA	4	43	19.5
2422-0003	20x20	SQ	Lift-Out	S-K	20.3x20.3	517x517	22.8x22.8	579x579	22.5x22.5	572x572	2.5	0.31	0.9	ALUM	0.5	AA	4	74	33.6
2462-0002	20x20	SQ	Hinged	A-K	20.3x20.3	517x517	22.8x22.8	579x579	28.2x26.4	715x672	1.6	0.38	0.7	ALUM	0.3	AA	4	45	20.4
2462-0003	20x20	SQ	Hinged	S-K	20.3x20.3	517x517	22.8x22.8	579x579	25.2x22.8	640x579	2.5	0.31	0.9	ALUM	0.3	AA	4	76	34.5
2423-0002	22x22	SQ	Lift-Out	A-K	22.0x22.0	559x559	24.5x24.5	622x622	28.5x28.5	724x724	1.6	0.38	0.7	ALUM	0.3	AA	4	45	20.4
2423-0003	22x22	SQ	Lift-Out	S-K	22.0x22.0	559x559	24.5x24.5	622x622	24.7x24.7	627x627	2.5	0.31	0.9	ALUM	0.3	AA	4	92	41.7
2463-0002	22x22	SQ	Hinged	A-K	22.0x22.0	559x559	24.5x24.5	622x622	28.5x28.5	724x724	1.6	0.38	0.7	ALUM	0.3	AA	4	46	20.9

AA - Aluminium Alloy **DI** - Ductile Iron (see loading limits page) *Rough opening dimensions do not include hinge pockets **Requires escape handle as standard


Continued >







						Cas	st Alumin	ium Hato	hes - Ro	und									
								Hatch Dime							over nsions	Mecha	nism		embly
Part No.	Size (inch)	Shape	Style	Ring	Clear C	pening	Rough C	pening*	0	verall (Cove	r + Ri	ng)		Ma	terial			we	igiit
	()				A (inch)	A (mm)	B (inch)	B (mm)	C (inch)	C (mm)	D	E	F	Metal	Thick	Metal	Dog Qty.	lbs	kg
2463-0003	22x22	SQ	Hinged	S-K	22.0x22.0	559x559	24.5x24.5	622x622	26.8x24.3	681x617	2.5	0.31	0.9	ALUM	0.3	AA	4	92	41.7
2423-0002	22x22	SQ	Lift-Out	A-K	22.0x22.0	559x559	24.5x24.5	622x622	28.5x28.5	724x724	1.6	0.38	0.7	ALUM	0.3	AA	4	45	20.4
2423-0003	22x22	SQ	Lift-Out	S-K	22.0x22.0	559x559	24.5x24.5	622x622	24.6x24.9	625x625	2.5	0.31	0.9	ALUM	0.3	AA	4	92	41.7
2424-0002	24x24	SQ	Lift-Out	A-K	24.6x24.6	625x625	27.5x27.5	697x697	31.2x31.2	792x792	1.6	0.38	0.7	ALUM	0.3	AA	4	63	28.6
2424-0003	24x24	SQ	Lift-Out	S-K	24.0x24.0	610x610	27.4x27.4	695x695	27.4x27.4	695x695	2.5	0.31	0.9	ALUM	0.3	AA	4	82	37.2
2480-0106	24x24	SQ	Hinged	A-K	24.8x24.8	630x630	27.3x29.2	693x742	31.2x35.2	793x894	1.6	0.38	0.7	DI	0.3	DI	4	133	60.3
2480-0107	24x24	SQ	Hinged	S-K	24.7x24.7	629x629	27.4x29.5	695x748	29.6x27.4	752x695	2.5	0.31	0.9	DI	0.3	DI	4	155	70.3
2464-0002	24x24	SQ	Hinged	A-K	24.0x24.0	610x610	27.5x27.5	698x698	33.1x31.2	840x792	1.6	0.38	0.7	ALUM	0.3	AA	4	59	26.7
2464-0003	24x24	SQ	Hinged	S-K	24.0x24.0	610x610	27.4x27.4	695x695	29.6x27.4	695x695	2.5	0.31	0.9	ALUM	0.3	AA	4	87	39.5
2427-0002	27x27	SQ	Lift-Out	A-K	27.2x27.2	690x690	29.6x29.6	752x752	33.6x33.6	854x854	1.6	0.32	0.8	ALUM	0.3	AA	4	63	28.6
2427-0003	27x27	SQ	Lift-Out	S-K	27.2x27.2	690x690	29.6x29.6	750x750	29.6x29.6	752x752	2.5	0.31	1.9	ALUM	0.3	AA	4	85	38.6
2426-0006	30x30	SQ	Lift-Out	A-K	30.0x30.0	762x762	32.5x32.5	826x826	36.5x36.5	927x927	1.6	0.25	0.7	ALUM	0.3	AA	4	75	31
2426-0007	30x30	SQ	Lift-Out	S-K	30.0x30.0	762x762	32.5x32.5	826x826	32.6x32.6	828x828	2.5	0.31	0.9	ALUM	0.3	AA	4	113	51.3
2466-0006	30x30	SQ	Hinged	A-K	30.0x30.0	762x762	32.5x32.5	826x826	36.5x36.5	927x927	1.6	0.25	0.7	ALUM	0.2	AA	4	78	35.4
2466-0007	30x30	SQ	Hinged	S-K	30.0x30.0	762x762	32.5x32.5	826x826	34.8x32.6	884x829	2.5	0.31	0.9	ALUM	0.2	AA	4	114	51.7
2428-0002 0001**	36x36	SQ	Lift-Out	A-K	36.0x36.0	914x914	39.3x39.3	998x998	42.5x42.5	1080x1080	2.5	0.31	0.9	ALUM	0.4	AA	8	104	48
2428-0003 0001**	36x36	SQ	Lift-Out	S-K	36.0x36.0	914x914	39.3x39.3	998x998	39.2x39.0	996x991	2.5	0.31	0.9	ALUM	0.4	AA	8	134	60.8
2468-0002 0001**	36x36	SQ	Hinged	A-K	36.0x36.0	914x914	39.3x39.3	998x998	44.2x42.2	1067x1067	2.5	0.31	0.9	ALUM	0.3	AA	8	119	54
2468-0003 0001**	36x36	SQ	Hinged	S-K	36.0x36.0	914x914	39.3x39.3	998x998	43.6x39.3	1106x997	2.5	0.31	0.9	ALUM	0.3	AA	8	149	67.6

AA - Aluminium Alloy **DI** - Ductile Iron (see loading limits page) *Rough opening dimensions do not include hinge pockets **Requires escape handle as standard

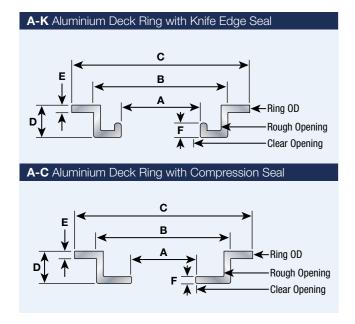



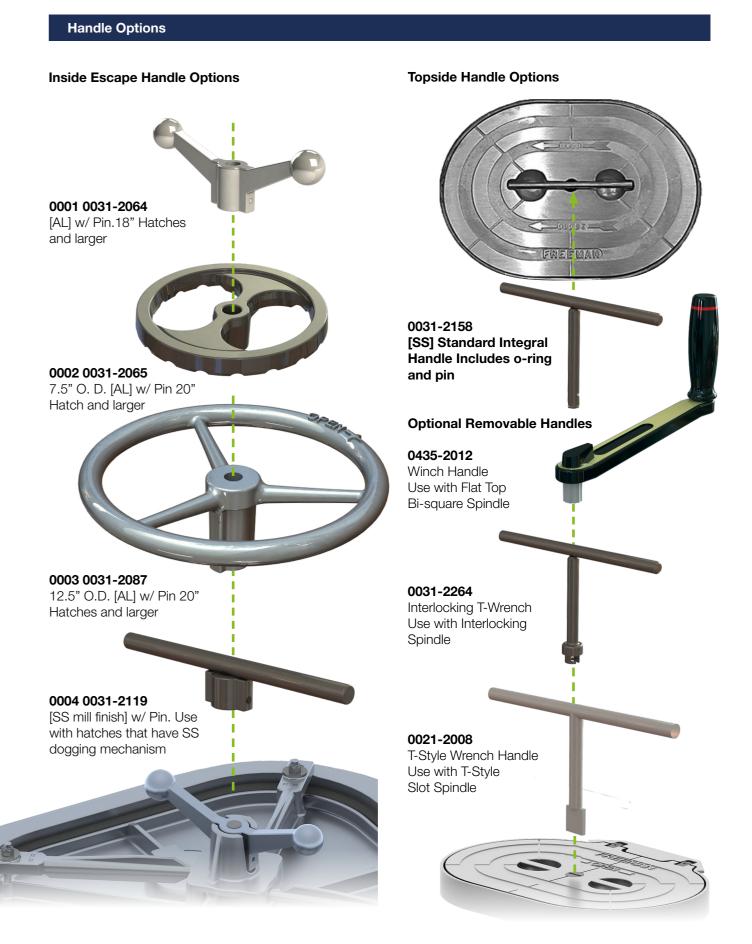





Hinge Options



0461-2205 [SS] Standard hinge Assembly Double Acting

Allows cover to lay flat





0461-2202 [SS] Standard Hinge Assembly Single Pivot

Use with hold open or gas shocks






0461-2077 Yoke Hinge


Concealed, includes hold open





0461-2171 Yoke Hinge

Raised flush with Teak







Hold Open Options



0031-2007 Hold Open

Use with 18", 20", 24", 18"x24", 15"x24", 20"x20", 22"x22", 24"x24", 19"x26"






0423-1023 Hold Open Slide Rod


Hold open , slide rod Use with 24"x24" or larger



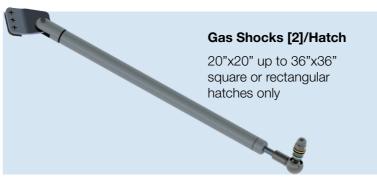



Miscellaneous Options



Coaming Drain

Use with knife edge


Drill & Countersink

Aluminium rings with flange. Hatch shown with Inside escape handle, drain hold open ring drilled and countersunk



Sensor Assembly

Magnetic contact senses if hatch isn't dogged completely





Cast Hatch Loading Limits

The following values CANN	OT be used to extr	apolate loading limits	on other models or cover/r	ing combinations.
Hatch Part Number, Description	Max Load kN (lbf)	Max Load-Fatigue kN (lbf)	Max Watertight Pressure kPa (psi)	Comment
2483-1101 (0136-4001) Oval 15"x24" Cast Iron	13 (2900)	-	28 (4)	All rings excluding aluminium
2433-1001 (2433-3001) Oval 15"x24" Aluminium	2.5 (550)	1.5 (350)	28 (4)	All rings, as cast
2482-1101 (0136-4003) Round 24" Cast Iron	17 (3800)	-	43 (6.2)	All rings excluding aluminium
2411-1001 (2411-3001) Round 24" Aluminium	4.5 (1000)	3 (650)	43 (6.2)	All rings, as cast
2481-1101 (0136-4002) Round 18" Cast Iron	16 (3600)	-	38 (5.5)	All rings excluding aluminium
2404-1001 (0111-4106) Round 18" Aluminium	3 (650)	2 (450)	38 (5.5)	All rings, as cast
2480-1101 (0136-4006) Hinged Square 24"x24" Cast Iron	*3.5 (800)	-	*55 (8)	All rings excluding aluminium
2464-1001 (2464-3001) Hinged Square 24"x24" Aluminium	1.5 (350)	1 (200)	55 (8)	All rings, as cast
_	* Failure n	node is non-typical and	found at hinge pin	

Definitions

- Max load: maximum point load acceptable on any point on top of the cover.
- Max load-fatigue: maximum cyclic point load acceptable on any point on top of the cover. Higher loads will result in non-infinite fatigue life which may be acceptable in certain applications.
- Max watertightness pressure: Maximum tank test pressure (inside direction).

Analysis

The load results are based on finite element analysis of hatch/ring combinations. In the case of aluminium castings, the fatigue limit is also included as it is lower than the yield limit. A 2x safety factor was assumed in all instances.

The watertightness pressures listed are based on Type Approvals and previous sealing results. Note that only the aluminium models hold TA certificates.

Higher loading results may be acceptable based on the application and other requirements. Please contact Engineering if additional clarity is required.

For the full range of available products and specifications please visit: www.advantecglobal.com/marine



Watertight Hatches



Premium Duty - 3140 Series

Individual Dog

Freeman Marine 3140 Series hatches are manufactured from marine grade aluminium, with an option for steel or stainless-steel coamings, flush or raised.





Premium Duty - 3440 Series

Quick Action

Freeman Marine 3440 Series hatches are manufactured from marine grade aluminium, with an option for steel or stainless-steel coamings, flush or raised.





Commercial Heavy Duty - 3211 Series

Flush

Freeman Marine's Model 3211 is a flush hatch, that is class approved, manufactured in marine grade aluminum, A36 steel or 304/316 stainless-steel.





Commercial Heavy Duty - 3212 Series

Raised

Freeman Marine's Model 3212 is a raised hatch, that is class approved, manufactured in marine grade aluminum, A36 steel or 304/316 stainless-steel.





Premium Military Closures



Our products are engineered to meet the rigorous standards of the Naval Sea Systems Command (NAVSEA) for water and fire resistance, shock and vibration resistance, and long-term durability.

Doors

- Weathertight & watertight doors
- Aluminum, steel & stainless-steel
- · Quick-acting & individual dogging
- Shock & fire rating qualifications
- Robotic certified welding
- ISO 9001:2015 Certified
- Quality control & testing NAVSEA Mil Spec 248/1689




Scuttles

- High-pressure watertight
- Flush, ramped & raised coamings
- Quick-acting & individual dogging
- Shock & fire rating qualifications
- ISO 9001:2015 Certified
- Quality control & testing NAVSEA Mil Spec 248/1689

Features

- Hold-opens
- Adjustable dogs
- Knife-edge watertight sealing
- Silicone high-heat gasketing
- Aluminum, steel & stainless-steel
- Quick-acting & individual dogging



Hatches

- Watertight
- Aluminum, steel & stainless-steel
- Flush & raised coamings
- Integrated scuttle
- Quick-acting, drop-bolt & individual dogging
- Shock & fire rating qualifications
- ISO 9001:2015 Certified
- Quality control & testing NAVSEA Mil Spec 248/1689

Features

- Hold-opens
- Adjustable dogs
- Knife-edge watertight sealing
- Silicone high-heat gasketing
- Aluminum, steel & stainless-steel
- Quick-acting, drop-bolt & individual dogging


Drop Bolt

Military & Commercial Cast Aluminium Closures



Ventilation Hatches

- 2120-0002 10" x 10"
- 2121-0002 10" x 12"
- 2122-0002 12" x 12"



Console Door

- Model 6101-0002 11" x 23"
- Model 6101-0004 9" x 18"
- Model 6101-0005 18" x 28"



Lens Hatch

- · Quick-acting watertight
- Clear opening 25.5" x 25.5"



Interior Access Hatch

- Clear opening 24.3" x 24.3"
- Flush slam latch
- Neoprene gasket





Civil Engineering Hatches

- Floating Bridge
- Airport & Ports
- Sewer & Dams
- Commercial Buildings



Flush Shore Power Hatch

- Watertight
- Flush Weld-In
- Available sizes: 9" x 15" & 11" x 20"





Quick Availability Doors:

- Selection of watertight and weathertight doors
- Stock items, ready to ship

- Guaranteed quality products
- Hinged and sliding

Halvard is the UK & Ireland **Distributor for Freeman Marine**



Approvals & Certificates

Quality Policy Statement

- Consistently meet or exceed our customer's expectation for product quality and performance.
- Consistently meet or exceed our customer's expectation for product and service delivery.
- Continuously improve our processes and systems.

serco

• Provide employee training to better serve our customers and to support personal growth.

Craftsman Training and Certification

Halyard Technicians participate regularly in training and certification programs to gain new skills, update capabilities and certify compliance with industry standards for design, machining, welding, fabrication, painting and other specialized skills. Our goal is to constantly improve not only its products but also the quality of life and work of its valued employees.

AdvanTec Marine closures have received specific intended use acceptance by:

- DNV Det Norske Veritas
- LR Lloyds Register of Shipping
- GL Germanisher Lloyds
- BV Bureau Veritas
- ABS-American Bureau of Shipping
- MCA Maritime Coastquard Agency

3 YEAR

HASSLE-FREE

• USCG - US Coast Guard

ADVANTEC ADVANTAGE

• CCG - Canadian Coast Guard (Transport Canada)

RELIABLE **SOLUTIONS**

SUPERIOR **QUALITY**

WORLD-CLASS **SUPPORT**



ADVANTEC

MANUFACTURING USA

FACTORY APPROVALS

CERTIFICATE OF

MANUFACTURING

ASSESSMENT

BV MODE II | ISO 9001:2015





TYPE APPROVALS

2400 Series Watertight Hatches: Cert # 23-2417921-PDA

2400 Series Watertight Hatches: Cert # LR23366654TA

1212 & 1662 Watertight & Weathertight: Cert # 23-2402820-PDA

1212 Watertight Door: Cert # 23-2402821-PDA

3212 Raised Watertight Hatches: Cert # 23-2402822-PDA

3211 Flush Watertight Hatches: Cert # 23-2402819-PDA







Our Warranty

All Non-Powered Equipment:

• Platinum Warranty - 3 years from date of shipment

All Powered Equipment:

- Standard Warranty 2 years from date of shipment
- 1 year extension Onsite commissioning required by AdvanTec Marine or certified technician

Scan for more information and the full range of available products



Doors:

ranges

Sliding versions

stainless steel

Painted finish option

 Marine Classification Society Certifications

• Weathertight & Watertight options

• Standard, Heavy Duty & Premium

• Single, Dutch, French hinged &

Manual or powered operation

Commercial, Military & Yacht

• Marine grade aluminium, steel or

Standard Duty Weathertight



1111 Series

Standard Duty, Single Leaf, Bonded Construction, Individual Dog

- The doors have .080" or .160" marine grade aluminium skins bonded with Plexus® structural adhesive.
- The construction includes a Foil-Faced Foam Sheathing Board, which is a rigid polyisocyanurate foam sheathing that provides exceptional heat, sound and moisture resistance.
- Internal welding stiffeners



1511 Series

Standard Duty, Dutch Leaf, Semi Custom

- Double-skin, semi-custom doors perform like a single panel door when regular access is needed, yet the top half can be operated separately from the bottom half
- Door panels are aluminium .080" mill finished skins are bonded to an extruded aluminium panel frame.

Fully insulated, standard duty Dutch doors are suitable for the following typical high traffic access installations:

• Example locations: Pilothouse - Galley - Salon - Main Deck

1611 Series

Standard Duty, French Leaf, Bonded Construction, Individual Dog

- Wider access French doors perform like two single panel doors that seal to each other
- Thick panel skins, extra internal reinforcements, no exposed seams and all welded construction
- Individually dogged versions. Lineal brushed finish, with the option of custom colour

Fully insulated, suitable for the following typical high traffic access installations:

 Example locations: Salon - Main Deck - Owner's Cabin



Heavy Duty Weathertight



1120 Series

Heavy Duty, Single Aluminum Panel

- Optional yacht-quality paint to your colour specifications, the 1120 Series welded construction results in a smooth, seamless appearance that features long lasting beauty
- Doors offer welded in windows and can accommodate special glazing

Suitable for the following typical high traffic access installations:

 Example locations: Pilothouse - Galley - Engine Room - Salon - Main Deck - Storage



1520 Series

Heavy Dutv. Dutch Leaf, Clamp-In Window

- Perform like a single panel door when regular access is needed, yet the top half can be operated separately
- Optional yacht quality paint to your color specifications, fully welded construction results in a seamless appearance
- Doors offer welded in windows and can accommodate special glazing

Fully insulated, suitable for the following typical high traffic access installations:

 Example locations: Pilothouse -Galley - Salon - Main Deck





1620 Series

Heavy Duty, French Leaf, Individual Dog

- Wide access French doors, two single panel doors that seal to each other
- Thick panel skins, extra internal reinforcements, no exposed seams and all welded construction to create a rugged closure in individually dogged versions
- Doors offer welded-in windows and can accommodate special glazing

Fully insulated, suitable for the following typical high traffic access installations:

 Example locations: Salon - Main Deck -Owner's Cabin - Passenger Ferries - Water Taxis - Dinner - Cruise Vessels - Tour Boats





Standard Duty Sliding Weathertight



1710 Series

Heavy Duty, Formed Panel, Steel/Stainless Steel, Commercial

- Single-axis sliding boat doors offer traditional felted strip weathertight sealing
- Sliding doors can be specified in virtually any size required and a variety of configurations
- Passive solid panels as well as side lights are also available
- Finished in yacht-quality linear polyurethane and offer attention to detail, durability, performance
- Optional nuckled panels featuring angles defined for individual projects
- Quiet and durable urethane rollers, full perimeter felt seals and deep drainage gutters, glazing can be done with mitered or radiused corners. Individual top and vertical panels separated by a sturdy, robust mullion is another option
- Flybridge sliders can be specified with twotone paint and factory installed glazing. This allows the builder to merely prepare the rough opening sealing surfaces, bolt in the Freeman slider module, and install drain plumbing

 Example locations: Salon - Main Deck - Owner's Cabin



1716 Series

Standard Duty, Sliding, Single-Axis, Bi-Parting

- Single-axis sliding doors offer traditional felted strip weathertight sealing
- Specify in virtually any size required and a variety of configurations; single panel, bi-parting, and multi-panel styles
- Custom sized windows designed to complement adjacent vessel windows
- Optional assive solid panels as well as side lights
- Finished in yacht-quality linear polyurethane and offer attention to detail, durability
- Optinal fabricated with knuckled panels featuring angles defined for individual projects
- Quiet and durable urethane rollers, full perimeter felt seals and deep drainage gutters
- Glazing can be done with mitered or radiused corners. Individual top and vertical panels separated by a sturdy, robust mullion is another option.

- Flybridge sliders can be specified with twotone paint and factory installed glazing
- Example locations: Galley Salon
 Main Deck -Owner's Cabin



Premium Duty Watertight



1140 Series

Heavy Duty, Sliding, Dual-Axis, Single Leaf

- Heavy-duty, single aluminum panel, watertight door designed for commercial use on boats
- Fully insulated, and high quality, making it suitable for commercial, military, and yacht crew or machinery space applications

Special Applications

- For military-security applications, R/F – EMI suppression
- Ballistics resistance, and low radar reflective signature performance can be specified
- GSA approved locks for containers used to protect national security information and arms, ammunition and explosives
- Fully insulated and moderately priced, Freeman Commercial Aluminum Panel doors are suitable for commercial, military and yacht crew or machinery space applications
- Example locations: Transom Below Deck Bulkheads - Engine Room -Machinery Spaces - Storage



1440 Series

Heavy Duty, Single Leaf, Commercial Aluminum Panel, Quick-Acting Dogging

- Commercial panel, quick acting boat doors feature patented chaindrive, single actuation dogging
- Rugged knife-edge seal, robust gasket and floating hinges to provide a Commercial watertight seal** when properly adjusted and dogged closed.
- Thick aluminum panel skins (.160" up to .250"), internal reinforcements, welded construction and screw fastened interior skin create the rugged, closure that is required in a Q-A dogged door
- Finished with lineal brushed durable uniform texture finish.
- Welded in windows and can accommodate special glazing such as heated glass, ballistic glass. For military-security applications, R/F – EMI suppression, ballistics resistance and low radar reflective signature performance can be specified.
- Fully insulated and moderately priced, suitable for commercial, military and yacht crew or machinery space applications

1440 Series Quick-Acting commercial duty doors are specified where aggressive sealing is required:

 Example locations: Transom - Bulkheads
 Deck Compartments - Engine Room -Main Deck Access - Technical Spaces





Quick Ship Doors



250 Series Weathertight doors

250 Hinged door & 250 Dutch door

- Marine Grade .090" Aluminium Captured Panel Skins Mill Finish
- Welded 6063 Flanged Aluminium Frame
- 4" Radius Corners
- Gasket on Frame
- Insulation Korolite Rigid Foam Core
- Bolt-in or Weld-in Frames
- (2) Individual Nylon Dogs
- Stainless Steel Hinges and Fasteners
- Trioving Lockset with 3 keys







250 Dutch

1212 Series Watertight doors

Hinged Watertight Door

- Marine Grade Interprime 198 Red Oxide Primer Finish
- Welded Mild Steel, Radius Formed Corners
- Gasket on Door Panel for Long Life and Positive Sealing
- 250" Thick, Outside Mild Steel Panel
- (4) Individual Steel Dogs
- (3) Welded Steel Panel Hinges
- Inside and Outside Steel Pull Handles

300X Series Sliding Doors

Single Panel Sliding Door

- Commercial Duty Closure Designed for Offshore Use
- Marine Grade 6063 Aluminium
- Mill Finish
- Insulation Korolite Rigid Foam Core
- Tempered Window
- Trioving Lockset with 3 keys



Premium Yacht & Commercial Vessel



Directbond Glass, Hinged/Sliding Doors & Hatches









- 6mm, 8mm or 10mm tempered glass. Clear, or from our selection of available tint options
- Customizable shapes and sizing
- Wide selection of window openings to meet customer requirements
- Visually appealing wrap around glass
- Wide selection of window openings to meat customer requirements
- Example locations: Patrol boats, fishing vessels, tugs & pleasure craft

Premium Quality Defence & Commercial/Workboat Doors & Hatches



- Classed vessels
- Rollover rescue, navies, specialized commercial boats





72 Halyard Products Range Halyard Products Range 73

Premium Yacht & Commercial Vessel

World-class Superyacht Sliding & Hinged Doors





• Classed Superyachts









Leaders in the Designed and Manufacture of Custom Made Doors, Hatches, Tanks & Structures

> **Bespoke Made to Order Doors, Hatches & Manholes**

- Weathertight
- Watertight
- Fire Rated

Available in:

- Marine Grade Steel
- Stainless Steel
- Aluminium

Available with:

 Marine Classification Society Approvals

Halyard is the UK & Ireland **Distributor for Ucalsa**

BOX



PACIFIC COAST



Watertight & Fire Rated Doors & Hatches

Ucalsa was established in 1986 and has evolved into a major manufacturer of weathertight, watertight, and fire rated doors, hatches and manholes supplying its products across Europe and further afield. In addition, Ucalsa also designs and manufactures tanks, gangways and other fabricated vessel systems. With a modern factory spanning more than 10,000 square metres equipped with the latest equipment and with in-house design, Ucalsa specialise in bespoke solutions optimised to suit the customers specifications.

Halyard are the Ucalsa distributor for the UK and Ireland for their bespoke weathertight, watertight and fire rated doors, hatches and manholes. These are made to suit the customers specification rather than from a standard range. This differs from Freeman Marine who make an extended range of standard products with a selection of options.



Spraytight Doors

External doors bullt In accordance with Standard NS 6091 or designed as required. Normally located on upper decks, they withstand spray and do not form part of the stability calculations.

Weathertight Doors

Doors designed to withstand external pressures. Built in accordance with Standards NS 6090 and ISO 6042 with the same resistance as the bulkhead Into which they are fitted.



Doors inserted in watertight bulkhead under the freeboard deck. They are designed to withstand static water pressure on

both sides. Type approval is required and they are verified individually by means of a watertightness test of the required water column.

Fire Rated Doors

MED and UKCA certified A0, A15, A30, A60 watertight doors.

Customised Solutions

Tailor-made shell and pantograph doors with options for manual or hydraulic closures.

Hatches

Flush hatches or with coamings and with different watertight ratings built in accordance with Ucalsa standards, customer specifications or customised design and complying with the applicable regulations (NS 6028, ISO 12216, etc.)



Options: A wide range of closing systems, windows, locks and hinge systems are available for doors. Materials available for all products include Marine Steel, Stainless Steel & Aluminium.

Watertight Manholes

Ucalsa manholes built to recognised standards such as: NS6261, NS6262, NS6263 and NS6270; NAE standards: 64524, 64527, 64530 and 64531; or shipyard's own standards.


















Materials


- Naval sheet steel
- Aluminium
- Stainless


Details

Standard NS - 6261














Standard NS - 6263







For the full range of available products and specifications please visit: www.ucalsa.es/en









Raising the bar on Yacht Crane Performance

Yacht Cranes:

- High performance
- Efficient lightweight versions
- Heavy duty versions
- Advanced easy operation
- 2 Year warranty

Halvard is the UK & Ireland **Distributor for Steelhead** Marine



High Performance Yacht Cranes



High Performance Yacht Lifting Equipment

Steelhead Marine's elegantly designed, high-tech cranes are renowned across the yachting industry, but their ambitions stretch even higher. Through persistence, innovation, and hard work they are aiming to become the leader in advancing hydraulic solutions for the yachting world.

With strong leadership and a dynamic workforce, Steelhead is working to take their innovative products to the next level of sophistication. A diligent sales, engineering, design and build process combined with a close working relationship with their clients ensures Steelhead products will be at the forefront of innovation in the global yacht market.

Benefits of Steelhead Marine

- Engineered for Performance
- Greater lift capacity with reduced crane weight
- Superior engineering and advanced materials
- Durability, strength and reliability
- Compact and attractive design that puts less



Our Warranty

All Non-Powered Equipment:

• Platinum Warranty - 3 years from date of shipment

All Powered Equipment:

- Standard Warranty 2 years from date of shipment
- 1 year extension Onsite commissioning required by AdvanTec Marine or certified technician

Scan for more information and the full range of available products







LW Series (Light Weight)

LW Series offers Manual or Electric winch operation with hinging base for storage

Weight Range: 250-350 LBS





WD Series

Whisper-quiet, low lift requirments, compact, sleek, and dual function davits.

Weight Range: 600-1,000 LBS





E Series

Lightweight aluminum crane with standard two function (luffing & lifting) operation.

Weight Range: 1,000-1,750 LBS





ES Series

Lightweight, super efficient, low profile European design with four-function hydraulics. Comes standard with wireless controller.

Weight Range: 1,000-2,500 LBS





CT Series

Fabricated heavy duty four function hydraulic cranes with standard or customizable features. Standard with wireless & wired pendent controllers.

Weight Range: 2,000-10,000 LBS





High Performance Yacht Crane Product Specifications

	Yacht Crane Product Specifications												
Series	Functions	Options	Model	Capacity Reach Hoist			Retracted Length		Weight				
				lbs	kg	ft	m	ft	m	ft	m	lbs	kg
ıw	LW 12vDC Winch or Manual Hand Crank Pedestal Base Standpipe Mount	LW250	250	113	5.3	1.6	8	2.4	NA	NA	66/72	30/32	
		LW350	350	158	5.3	1.6	8	2.4	NA	NA	78/84	35/38	
	Hydraulic	Standpipe Mount	WD600	600	363	8	2.4	17	5.2	NA	NA	215	98
WD	Hoisting Power Luffing	Pedestal Base HPU Base Square Base	WD800	800	363	8	2.4	17	5.2	NA	NA	215	98
	Round Base	WD1000	1000	454	8	2.4	17	5.2	NA	NA	235	107	
		Standpipe Mount	E1000	1000	454	10	3.0	16	4.9	6	1.8	384	174
E	Hydraulic Pedestal Base Hoisting HPU Base	E1100	1100	500	10	3.0	16	4.9	6	1.8	389	167	
_	Luffing		E1500	1500	680	12	3.7	20	6	7	2.1	582	263
		Round Base	E1750	1750	794	12	3.6	20	6	7	2.1	610	276
			ES1000	2000	454	10	3.0	16	4.9	6	1.8	384	174
	Hydraulic	Standpipe Mount	ES1100	2500	500	10	3.0	16	4.9	6	1.8	384	174
ES	Hoisting Luffing	Pedestal Base HPU Base	ES1500	3000	680	12	3.7	20	6	7	2.1	602	273
	Rotation	Square Base	ES1750	3500	794	12	3.6	20	6	7	2.1	630	285
	Extension	Round Base	ES2200	4000	1000	14	4.3	22	6.7	8	2.4	1150	521
			ES2500	5000	1131	14	4.3	22	6.7	8	2.4	1150	521
		5 " 6 . " .	CT2000	2000	907	18/20	5.5/6.1	24	7.3	12	3.7	1050	476
		Radio Controlled Fixed Boom	CT2500	2500	1134	18/20	5.5/6.1	24	7.3	12	3.7	1150	522
	Hydraulic	vdraulic 230V ac Power	CT3000	3000	1361	16	4.9	24	7.3	11	3.4	1150	522
СТ	Hoisting Luffing	or Ship's Hydraulics Standpipe Mount	CT3500	3500	1588	18/20	5.5/6.1	24	7.3	13	4.0	1700	771
01	Rotation	Square Base	CT4000	4000	1814	20	6.1	30	9.1	12.5	3.8	2100	953
	Extension	Round Base Custom Reach	CT5000	5000	2268	20	6.1	30	9.1	12.5	3.8	2400	1089
		Available	CT6000	6000	2722	20/30	6.1/9.1	30	9.1	12.5	3.8	2600	1179
			CT1000	10000	4536	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC



Cranes are proof tested to minimum 110% capacity



All cranes above 1500lbs (680kg) come with wired and wireless proportional controls



Compact design uses less deck space



Whisper quiet linear winches use composite rope which is quieter and stronger than steel cable









LW WIRED CONTROLLER P/N114918	WD CONTROLLER P/N104921	NON-PROPORTIONAL P/N104916-15' Cord	PROPORTIONAL P/N1044917-15' Cord P/N1044922-20' Cord
6			
 Wired 12' Lead Single Function	 WIRED 6' lanyard 2 Function controller Rope, Luffing 	 Wired 12' Lead Single Function Controller Rope 	 Wired 12' Lead Single Function Controller Rope
LW250 & LW350	LD600, LD800 & WD1000	E1000, E1100, ES1000 & ES1100	ES1500, ES1750, CT2000, CT2500, CT3500, CT4000, CT5000 &CT6000

LW WIRELESS CONTROLLER P/N114919	MICRO CONTROLLER P/N106251	MACRO CONTROLLER P/N113835	PROPORTIONAL GUIDER P/N104926
HEIGHT 2.25°. MIDTH 4.00"	WIDTH 1.75"	WIDTH 2.59"	WIDTH 1.75**
 Wireless 2 Controllers Dual Acting Solenoid Range to 50' Single Function Controller Rope 	 Wireless Function Controller Rope, Rotation, Luffing, Extension Battery Life 40 Hours Micro USB Charger Range to 600' Clonable Transmitter (can have more than one controller per reciever) 	 Wireless Function Controller Rope, Rotation, Luffing, Extension Battery Life 40 Hours Micro USB Charger Range to 600' Clonable Transmitter (can have more than one controller per reciever) 	 Wireless Function Controller Rope, Rotation, Luffing, Extension Proportional Trigger Controlled Twist to Release E-Stop Range to 1000' Rechargable Battery
LW250 & LW350	LD600, LD800 & WD1000	E1000, E1100, ES1000 & ES1100	ES1500, ES1750, CT2000, CT2500, CT3500, CT4000, CT5000 &CT6000

LW Series 250 & 350 **Standard Features** • 360° Manual Rotation • 12v DC Electric Winch Amsteel Blue™ Synthetic Rope Powder coated finish • Proof tested to 110% capacity Manual hand crank Wired Controller **Optional Features** Manual hand crank winch • Wireless controller Laydown Hinged base collapsed view Laydown Hinged base

WD Series 600, 800 & 1000

Standard Features

- 350° Manual Rotation
- Amsteel Blue™ Synthetic Rope
- Power Luffing
- Easy Installation
- Proof tested to 110% capacity
- Yacht Quality Paint Finish or Powder Coated
- 12v DC or 24v DC Power Unit

Optional Features

- Wireless Controllers
- Custom Specifications Available Upon Request
- Wireless controller

Mounting Options

- Standpipe
- Pedestal Base
- FRP HPU Base (shown)

Contact Halyard for full specifications



82 Halyard Products Range Halyard Products Range 83





E Series

Standard Features

- 350° Rotation
- Low Profile Design
- 2 function Hydraulics (Luffing, Hoisting)
- 12v DC or 24v DC Power Units
- Yacht Quality Paint Finish
- Amsteel Blue™ Synthetic Rope
- Proof Tested to 110% Capacity
- Wireless Control

Optional Features

- Power Rotation, Power Extension
- Wired Controllers
- 230V AC Power
- Color Match Finish
- Custom Specifications Available Upon Request

Standard Mounting Options

- Standpipe
- Round Base
- HPU Base
- Square Base



ES Series

Standard Features


- 4 Powered Function
- Luffing, Rotation, Extension & Hoisting
- ES1000-ES1750: 355° Rotation
- ES2200 & 2500: Infinite Rotation
- Amsteel Blue™ Synthetic Rope
- Proof Tested to 110% Capacity
- Yacht Quality Paint Finish
- 12v DC or 24v DC



Optional Features

- Wired Controllers
- A/C Powered Hydraulic Power Unit

Custom Options Upon Request



Contact Halyard for full specifications

CT Seies

Standard Features

- Infinite Rotation
- 4 Powered Function
 Luffing, Rotation, Extension & Hoisting
- 12v or 24v DC Power Units
- Yacht Quality Paint Finish
- Amsteel Blue™ Synthetic Rope
- Proof Tested to 125% Capacity
- Wired/Wireless Controllers

Optional Features


- Wired Controllers
- 230v AC Power
- Color Match Finish

Custom Options Upon Request



- Round Base
- HPU Base
- Square Base

Contact Halyard for full specifications

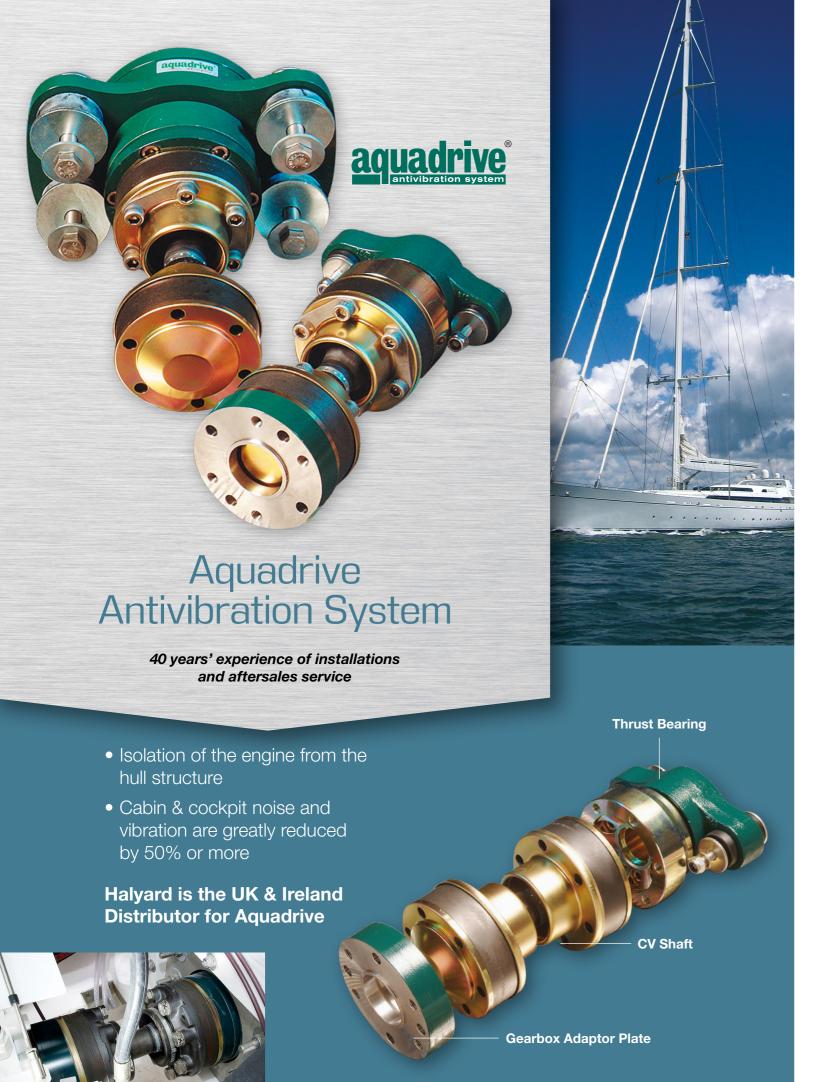

CVB 05.10 Aquadrive Moduline B10

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Sailing	35 / 45	3800	2.6:1
Displacement	26 / 35	2600	3.0:1


Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2° , the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 4-8° depending on shaft rpm.




Drive Shafts

Custom-length CV 05 driveshaft is available in lengths from 150 mm (from 240 mm with tubeshaft design). Maximum length depends on







Propeller Shaft Options

B10 Standard version accepts propeller shaft ØA from 20mm (3/4") to 40mm (11/2"). Oversize version with external clamp mechanism available. All B10 systems are also available with flange coupling to suit standard BW 5" propeller flange. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 10.10 Aquadrive Moduline B10


Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Planing	62 / 85	3800	2.0:1
Sailing	55 / 75	3800	2.6:1
Displacement	40 / 55	2600	3.0:1


 $\label{Note:Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted$ power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 4-8° depending on shaft rpm.

Maximum Static Torque (ØA=1")	1300 Nm / 969 lbft
Maximum Propeller Shaft Revolutions	4000 rpm
Maximum Continuous Propeller Thrust	11 kN / 2475 lbft

Custom-length CV 10 driveshaft is available in lengths from 150 mm (from 240 mm with tubeshaft design). Maximum length depends on







Propeller Shaft Options

B10 Standard version accepts propeller shaft ØA from 20mm (3/4") to 40mm (11/2"). Oversize version with external clamp mechanism available. All B10 systems are also available with flange coupling to suit standard BW 5" propeller flange. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 15.10 Aquadrive Moduline B10

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Planing	114 / 155	3800	2.0:1
Semi-displacement	96 / 130	3300	2.2:1
Sailing	85 / 115	3300	2.6:1
Displacement	66 / 90	2600	3.0:1


Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 4-8° depending on shaft rpm.



Drive Shafts

Custom-length CV 15 driveshaft is available in lengths from 170mm (from 270mm with tubeshaft design). Maximum length depends on shaft rom





Propeller Shaft Options

B10 Standard version accepts propeller shaft ØA from 20mm (3/4") to 40mm (11/2"). Oversize version with external clamp mechanism available.

All B10 systems are also available with flange coupling to suit standard BW 5" propeller flange. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 21.10 Aquadrive Moduline B10

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Planing Boat	173 / 235	3800	2.0:1
Semi-displacement Motorboat	147 / 200	3300	2.2:1
Displacement Motorboat	96 / 130	2500	3.1:1


Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 4-8° depending on shaft rpm




Drive Shafts

Custom-length CV 21 driveshaft is available in lengths from 210mm (from 280mm with tubeshaft design). Maximum length depends on shaft rom







Propeller Shaft Options

B10 Standard version accepts propeller shaft ØA from 20mm (3/4") to 40mm (11/2"). Oversize version with external clamp mechanism available. All B10 systems are also available with flange coupling to suit standard BW 5" propeller flange. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 21.20 Aquadrive Moduline B20

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	100 / 135	2600	3.0:1
Planing	165 / 225	3900	2.0:1


Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 4-8° depending on shaft rpm.




Drive Shafts

Custom-length CV 21 driveshaft is available in lengths from 210mm (from 280mm with tubeshaft design). Maximum length depends on shaft rpm.







NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 35mm.

Propeller Shaft Options

B20 Standard version accepts propeller shaft ØA from 35mm (11/2") to 50mm (2"). Oversize version with external clamp mechanism available. All B20 systems are also available with flange coupling. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 30.20 Aquadrive Moduline B20

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	130 / 175	2600	3.0:1
Planing	200 / 270	3300	2.0:1


Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 4-8° depending on shaft rpm.


Maximum Static Torque (ØA=2")	1400 Nm / 1034 lbft
Maximum Propeller Shaft Revolutions	2000 rpm
Maximum Continuous Propeller Thrust	14 kN / 3150 lbft

Drive Shafts

Custom-length CV 30 driveshaft is available in lengths from 245mm (from 340mm with tubeshaft design). Maximum length depends on shaft rom







NOTE: Above does not include Gearbox specific adaptor flange.

Adds approximately 40mm.

Propeller Shaft Options


B20 Standard version accepts propeller shaft ØA from 35mm (11/2") to 50mm (2"). Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 32.30 Aquadrive Moduline B30

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	195 / 265	2600	3.0:1
Planing	270 / 365	3000	2.0:1

Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).

The maximum allowable joint angle is 4-8° depending on shaft rpm.





NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 45mm

Maximum Static Torque 3000 Nm / 2215 lbft (ØA=65mm) Maximum Propeller 1700 rpm Shaft Revolutions **Maximum Continuous** 21 kN / 4725 lbft **Propeller Thrust**

Drive Shafts

Custom-length CV 32 driveshaft is available in lengths from 300mm (from 420mm with tubeshaft design). Maximum length depends on shaft rpm.





Propeller Shaft Options

B30 Standard version accepts propeller shaft ØA from 40mm (13/4") to 70mm (21/2"). All B30 systems are also available with flange coupling. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 42.30 Aquadrive Moduline B30


Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio	
Displacement	240 / 325	2800	3.0:1	
Planing	310 / 420	2600	2.5:1	

Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).

The maximum allowable joint angle is 4-8° depending on shaft rpm.




Custom-length CV 42 driveshaft is available in lengths from 270mm (from 430mm with tubeshaft design). Maximum length depends on



NOTE: Above does not include Gearbox specific adaptor flange.

360	39 E
	160 230



Propeller Shaft Options


B30 Standard version accepts propeller shaft ØA from 40mm (13/4") to 70mm (21/2"). All B10 systems are also available with flange coupling. Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 42.680 Aquadrive Heavy Duty HDL

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	220 / 300	2100	3.0:1
Planing	420 / 570	2600	2.0:1

Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).

The maximum allowable joint angle is 5-8° depending on shaft rpm.





NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 50mm.

Maximum Static Torque 10500 Nm / 7750 lbft Maximum Propeller 1700 rpm **Maximum Continuous** 40 kN / 9000 lbft **Propeller Thrust**

Drive Shafts

Custom-length CV 42 driveshaft is available in lengths from 270mm (from 430mm with tubeshaft design). Maximum length depends on





Propeller Shaft Options


HDL 680 Standard version accepts propeller shaft ØA from 50mm (2") to 70mm (21/2"). Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

CVB 42.680 Aquadrive Heavy Duty HDL Flanged

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	220 / 300	2600	3.0:1
Planing	420 / 570	2600	2.0:1

Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 5-8° depending on shaft rpm.

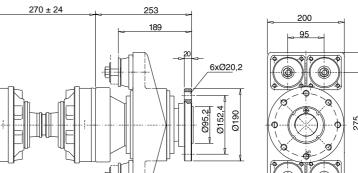


NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 50mm.

Maximum Static Torque	10500 Nm / 7750 lbft
Maximum Propeller Shaft Revolutions	1700 rpm
Maximum Continuous Propeller Thrust	40 kN / 9000 lbft

Custom-length CV 42 driveshaft is available in lengths from 270mm (from 430mm with tubeshaft design). Maximum length depends on





Propeller Shaft Options

HDL 680 Standard version accepts propeller shaft ØA from 50mm (2") to 70mm (21/2").


Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

HDL 48.690 Aquadrive Heavy Duty - Flanged Option Available

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	410 / 550	2100	3.0:1
Planing	670 / 900	2800	2.0:1

Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).


The maximum allowable joint angle is 5-8° depending on shaft rpm.




NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 50mm.

Maximum Static Torque 12240 Nm / 9060 lbft Maximum Propeller 1700 rpm **Maximum Continuous** 40 kN / 9000 lbft **Propeller Thrust**

Custom-length CV 48 driveshaft is available in lengths from 320mm (from 420mm with tubeshaft design). Maximum length depends on





Propeller Shaft Options


HDL 680 Standard version accepts propeller shaft ØA from 50mm (2") to 70mm (21/2"). Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.


HDL 60.700 Aquadrive Heavy Duty - Flanged Option Available

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	370 / 500	1900	2.7:1
Planing	660 / 900	2300	1.75:1

Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).

The maximum allowable joint angle is 3° depending on shaft rpm. For higher benching angles please consult Halyard






Maximum Static Torque

Maximum Propeller

Propeller Thrust

Maximum Continuous



12240 Nm / 9060 lbft

40 kN / 9000 lbft

1700 rpm

Custom-length CV 60 driveshaft is available in lengths from 370mm (from 700mm with tubeshaft design). Maximum length depends on

NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 60mm.

Propeller Shaft Options


HDL 700 Standard version accepts propeller shaft ØA from 50mm (2") to 70mm (21/2"). Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

HDL 60.700 Aquadrive Heavy Duty HT - High Tensile Steel

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	515 / 700	1900	3.0:1
Planing	735 / 1000	2300	2.5:1

Note: Above rating examples are based on optimum conditions with 2° for each OV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).

The maximum allowable joint angle is 3° depending on shaft rpm. For higher benching angles please consult Halyard.







Also available with 101/2" diameter flange

Drive Shafts

Custom-length CV 60 driveshaft is available in lengths from 370mm (from 700mm with tubeshaft design). Maximum length depends on





NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 60mm.

Propeller Shaft Options

HDL 700 Standard version accepts propeller shaft ØA from 50mm (2") to 70mm (21/2"). Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

HDL 60.780 Aquadrive Heavy Duty Flanged

Application Examples	Rated Power kW / hp	Crankshaft rpm	Gearbox Ratio
Displacement	590 / 800	2100	3.0:1
Planing	1100 / 1500	2300	1.75:1


Note: Above rating examples are based on optimum conditions with 2° for each CV joints. In case a CV joint will run at an angle greater than 2°, the max permitted power must be reduced (normally by 8-9% for each degree over 2°).

The maximum allowable joint angle is 3° depending on shaft rpm. For higher benching angles please consult Halyard.





Also available with 101/2" diameter flange

Custom-length CV 60 driveshaft is available in lengths from 370mm (from 700mm with tubeshaft design). Maximum length depends on shaft rpm.



NOTE: Above does not include Gearbox specific adaptor flange. Adds approximately 60mm.





Propeller Shaft Options


HDL 780 Standard version accepts propeller shaft ØA from 50mm (2") to 70mm (21/2").

Contact your local Halyard representative to assist you in selecting a suitable Aquadrive system for your application.

Aquadrive Mounts

Aquadrive System Engine Mounts


Engine Mounts					
50210 Series engine mounts complete with stud and any stiffness grade	0.5kg				
50220 Series engine mounts complete with stud and any stiffness grade	1.1kg				
50230 Series engine mounts complete with stud and any stiffness grade	2.6kg				
50240 Series engine mounts complete with stud and any stiffness grade	9.5kg				

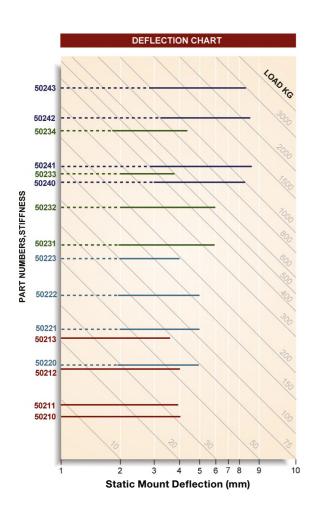


It is essential to select the correct rubber grade and mount for the engine or generator in question. For reference, the chart above shows the level of deflection (or squash) that will occur on each model of mount for a given loading.

In general you should aim for 3mm on the 50210, 4mm on the 50220, 5mm on the 50230 and 6mm on the 50240. The numbering system is simple: A 50223 mount is the 50220 model with number three rubber hardness and so on. Some engines, particularly those with less than four cylinders, require particular care and your distributor will help with these.


50210 Mounts




50220 Mounts



50230 Mounts



50240 Mounts






- Significant reduction of noise and vibration from engines, shafts and propellers
- Alignment issues eradicated
- Reduced installation times

- Mechanical losses reduced to 2% total
- Up to 8% reduction in fuel consumption and increased delivered horse power
- Reduced underwater drag

Halyard is the UK, Ireland, **Europe & Scandinavia Distributor for Seatorque**





Seatorque Shaft Systems

Developed over twenty-five years and fitted as standard equipment to a growing number of globally recognised boat manufacturers, Seatorque Shaft Systems offer a multitude of noise and vibration, fuel consumption and delivered power benefits.

- The 'BOSS' is a self-contained shaft and thrust bearing assembly supplied as a complete unit from the transmission output coupling to the propeller shaft end
- An oil-filled stainless-steel tube, in which the propeller shaft rotates supported by roller bearings, hydrodynamic journal bearings, and thrust bearings reduces drag to an absolute minimum
- The thrust bearing housing, at the inboard end of the tube, bolts to the hull transferring thrust from the propellers to the vessel structure and not through the transmission and engine
- Flexible isolators located between the 'BOSS' system, the vessel's hull, and the strut absorb thrust loads as well as significantly reducing noise and vibration



Features & Benefits

The enclosed shaft arrangement eliminates turbulence and drag, referred to as the 'Magnus Effect', so the water flow to the propeller is far less disturbed compared to a shaft spinning in open water. Inefficiency and drag created by cutlass bearings and shaft misalignment are also eliminated.

The system is completed with a Cardan shaft connecting the 'BOSS' system to the transmission reducing the need for very accurate and time-consuming engine alignment. An oil reservoir located in the engine room allows easy monitoring of the oil level.

Conventional shaft installations rely on anti-vibration mounts to absorb engine and transmission vibration as well as propeller thrust. The 'BOSS' system removes the thrust from the mounts so they can then be optimised for absorption of engine vibration and torque, reducing the transmission of vibration into engine beds and the vessels structure.

The combination of taper and needle roller bearings, the non-rotating full-length shaft casing, the resiliently mounted thrust bearing and strut, and the optimised engine mounts all contribute to the very significant reduction of noise and vibration, typically over 50%

In addition, the reduction of mechanical losses to only 2%, thus providing valuable extra power for propulsion, and fuel consumption reductions of circa 8%, as verified across a number of in-service case studies, are very valuable considerations when specifying your shaft system.


System Maintenance

Recommended service intervals on the 'BOSS' are very realistic for the commercial operator as well as for recreational use. Cost effective oil and seal changes are not required until 3,000 hours while a major inspection is only necessary every 10,000 hours or ten years.




Seal and oil changes are carried out when the vessel is out of the water, a job that takes approximately 1-2 hours per system (excluding removal and refitting of the propeller) comparing very favourably with conventional shaft systems, including those with a thrust bearing, which require: gland/stuffing box maintenance or replacement, cutlass bearing replacement, shaft/ strut alignment, and even shaft replacement in very silty/sandy waters. It is therefore very clear to see the maintenance advantages with the 'BOSS' system.


STM3 Enclosed Bolt-on-Shaft System 'BOSS' - Typical Installation

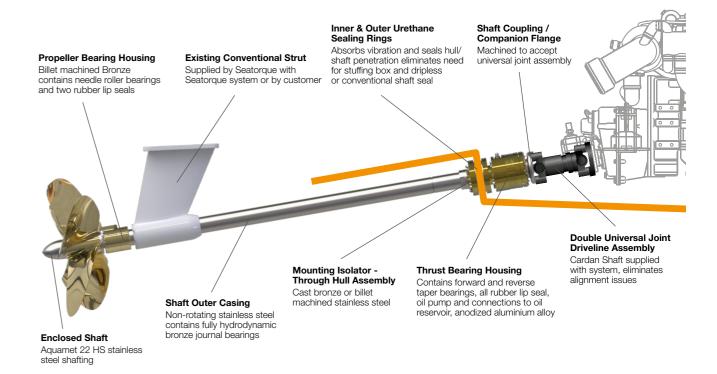

ST Series Tube Style System - Typical Installation

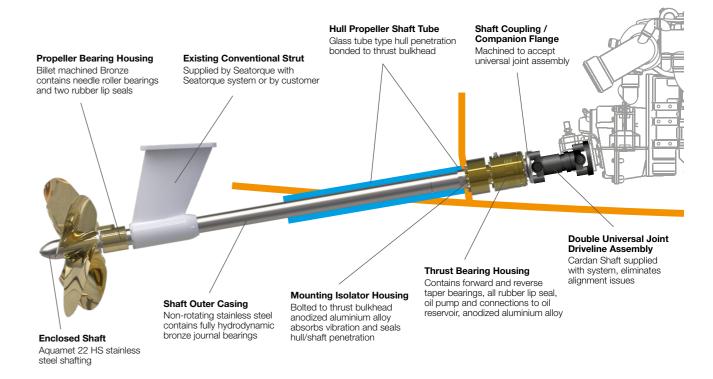


Seatorque Shaft Systems

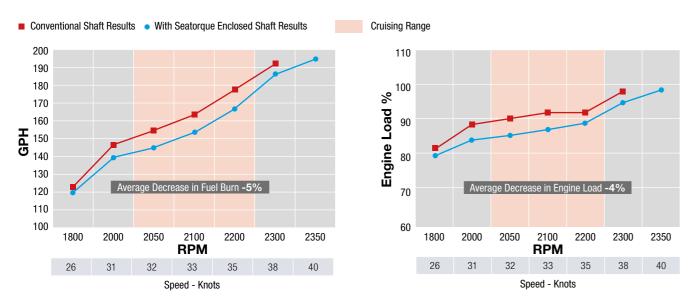

Test Boat Specifications: LOA - 64ft Displacement - 109,000lbs Engines: MTU 16V2000M91 2000hp

Seatorque 'BOSS' Standard Range Dimensions

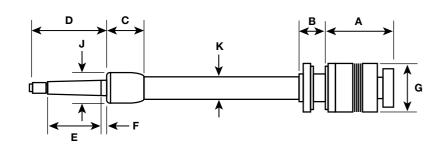

СТ	MO.	Α	В	С	D	Е	F	G	Н	J	K
SEF		Thrust Assembly	Mounting Length	Propeller Housing	Exposed Shaft	SAE Taper Length	Housing Clarence to Taper	Housing Diameter	Shaft Diameter	Propeller Housing Dia.	Shaft Casing 0.D.
100	inch	5.5	3	3	4.5	2.75	1	3.75	1	2.25	1.9
100	mm	139.70	76.20	76.20	114.30	69.85	25.40	95.25	25.40	57.15	48.26
175	inch	6.75	3.5	4.5	7.75	5	1	5	1.75	3.5	2.375
175	mm	171.45	88.90	114.30	196.85	127.00	25.40	127.00	44.45	88.90	60.33
200	inch	8	4	5	8.875	5.75	1	6.125	2	4.25	3
200	mm	203.20	101.60	127.00	225.43	146.05	25.40	155.58	50.80	107.95	76.20
250	inch	10.54	4.15	5.5	10.75	7.25	1	7.37	2.5	4.75	3.5
250	mm	267.72	105.41	139.70	273.05	184.15	25.40	187.20	63.50	139.70	101.60
300	inch	12.5	5.125	5.9	13	8.625	1	9	3	5.75	4
300	mm	317.50	130.18	149.86	330.20	219.08	25.40	228.60	76.20	146.05	101.60
350	inch	12.5	6	7.07	15.25	10.125	1	9.5	3.5	6.25	4.5
350	mm	317.50	152.40	179.58	387.35	257.18	25.40	241.30	88.90	158.75	114.30
400	inch	12.75	6	7.98	17.5	11.625	1	10	4	6.5	5.5
400	mm	323.85	152.40	202.69	444.50	295.28	25.40	254.00	101.60	165.10	139.70

In summary, the Seatorque 'BOSS' is a premium engineered, proven system that offers significantly reduced levels of noise and vibration, improved onboard comfort, increased delivered propeller power and reduced fuel consumption with very low maintenance requirements. The 'BOSS' further delivers unrivalled ruggedness in operation coupled

with the lowest underbody drag of any system currently available.


With systems available for commercial and recreational power and sailing vessels from circa 30 to 200 feet, there is a system to suit your needs.

Additional Benefits of all Seatorque Propulsion Systems

- Designed to handle power suitable for vessels from 30 Feet to 200 Feet, with no need for high cost of ownership, and often complex, multiengine and drive packages.
- All BOSS propulsion systems are always Joy Stick compatible.
- Builders enjoy simplified and dramatically reduced installation times.
- End users enjoy a silky smooth, whisper quiet ride, improved operating efficiency and range, plus easy maintenance cycles; with rugged reliable operation.

- Popular options include Seatorque's Bio-Mar fully biodegradable Oil; QuicKutter line cutters, extended warranty packages and more.
- All equipment is fully supported by our worldwide network of sales and service professionals, and backed by Seatorque's
- International 2-year Limited Warranty.

MX1 BOSS-Lite

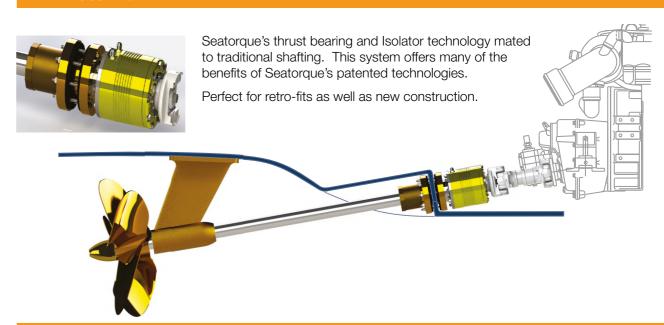


MX2 Duo-BOSS




A new concept in the field of dual, counter rotating propellers with no horsepower restrictions.

MX2 is a fixed shaft application, and an extension of the patented BOSS oil lubricated technology.

This system offers all the benefits of BOSS performance with even more added efficiency.

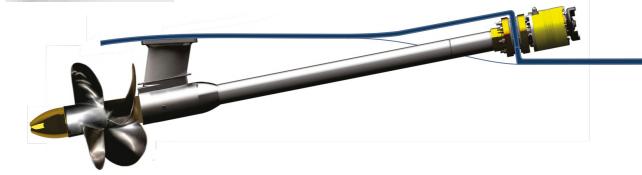

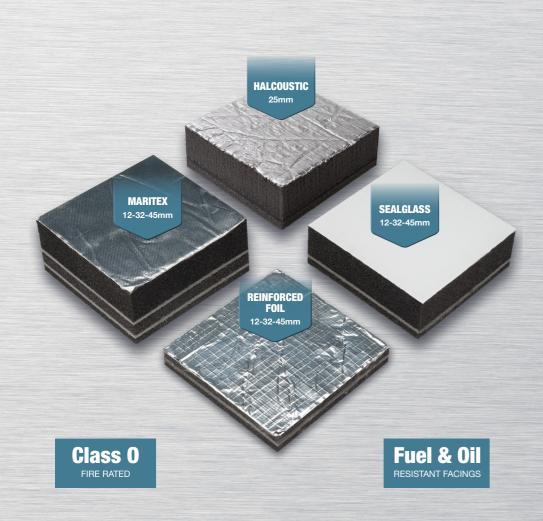

Noise Insulation Materials & Accessories

A proven range of high quality UK manufactured noise insulation materials

A range of technically advanced noise insulation materials:

- Compliant with the European Recreational Craft Directive
- Available in standard thicknesses of 12, 25, 32, and 45mm
- Three tough fuel and oil resistant facings: Maritex, Sealglass and Reinforced Foil
- Range of tapes & accessories

Self-adhesive mechanical mounting pin to assist with the installation of the materials.

Halyard self-adhesive joining tape.



Noise Insulation Materials & Accessories

Noise Insulation Materials, Tapes and Accessories

Part No.	Reference	Description
12mm (1/2") N	laterials (2.4 sq m	etre packs)
H000535	S3002	Maritex
H000537	S3004	Sealglass
H000536	S3003	Re-inforced Silver
12mm (1/2") S	elf Adhesive Mate	rials (2.4sq metre packs)
H000554	S5002	Maritex
H000556	S5004	Sealglass
H000555	S5003	Re-inforced Silver
25mm (1") Va	ue Materials (2.4s	q metre packs)
H024545	Halcoustic 25	Non-adhesive backing
H024546	Halcoustic 25SA	Self-adhesive backing
32mm (1 ¹ / ₂ ")	Materials (2.4 sq n	netre packs)
H000540	S3017	Maritex
H000538	S3015	Sealglass
H000539	S3016	Re-inforced Silver
32mm (1 ¹ / ₂ ")	Self Adhesive Mat	erials (2.4sq metre packs)
H000559	S5017	Maritex
H000557	S5015	Sealglass
H000558	S5016	Re-inforced Silver
45mm (1 ³ / ₄ ")	Materials (1.2sq m	etre packs)
H000543	S3039	Maritex
H000541	S3037	Sealglass
H000542	S3038	Re-inforced Silver
		erials (1.2sq metre packs)
		ng from the underside
H000562	S5039	Maritex
H000560	S5037	Sealglass
H000561	S5038	Re-inforced Silver
	Vave (1.2sq metre	
H020841	S3018	Foil Faced
Joining Tapes		
H020666	S4021	20m x 50mm Sealglass
H020311	S4025	5m x 50mm Maritex
H020158	S4026	20m x 50mm Maritex
H000552	S4036	50m x 50mm Silver Polyester
Accessories		
H000544	S4000	10m x 25mm Hatch Noise Tape
H000545	S4010	3m x 19mm Hatch Noise Tape
H000553	S4041	1.2m x 1m x 2.4mm Barrier Layer
H000533		Stick Pin & Backing Washer

Halyard noise insulation uses high performance barrier materials to achieve excellent acoustic results with low frequency noise associated with diesel engines and other onboard noise generating equipment.

Technical Specification

- Fire Safety Compliant with European Recreational Craft Directive (RCD)
- Class 0 fire rated (BS476-7) (Excludes Halcoustic and SilentWave)
- Lowest possible weight
- All materials tested to ISO 4589-3 (oxygen index – elevated temperature)
- Compliant to ISO 9094-2 Fire Protection for craft with a hull over 15m
- Bulkhead performance up to Rw 54dB (EN ISO 717-1)
- Fuel & oil resistant facing

Packing (12, 25 and 32mm materials):

Halcoustic only: 25mm supplied in packs of 4 sheets 990mm x 590mm (2.3m²)

12 & 32mm supplied in packs of 4 sheets 1000mm x 600mm (2.4m²)

Box weight is approximately 14kg for 12mm, 16kg for 25mm and 19kg for 32mm.


Packing (45mm materials):


45mm supplied in packs of 2 sheets 1000mm x 600mm (1.2m²).


Box weight is approximately 16kg.

Actual noise attenuation achievable with the products is dependant on many factors relating to the specific installation. Please note the above graphs are indicative only.

Please contact Halyard for further information and detailed product specifications to suit your particular installation requirements.







Halyard Acoustic Enclosures



Custom Generator Enclosure



Halyard are now able to offer a range of generator enclosures designed inhouse and manufactured to suit the particular engine / generator model and installation requirements.

The standard specification for these acoustic enclosures includes the following but other options are available on request:

- Modular Aluminium frame
- Removable and fixed panels to suit and allow for service access
- All panels internally lined with Halyard noise insulation materials
- Base frame skid with optional integrated fuel tank
- Cut outs to facilitate service connections
- Cooling fans
- Mounting to accommodate generator manufacturers control panel

Please contact Halyard for further information.






Effective control and prevention of oily contaminated bilge water. The Wavestream bilge filters are Lloyd's Register of shipping Type Approved and Boat Safety Scheme compliant. Wavestream provides an efficient way of managing bilge water removal without the need for holding tanks whilst still protecting the environment.

Wavestream Micro Bilge Filter




Ref: WMS - Part No. H000610		
Flow Rate	1 - 40 litres per minute	
Maximum Pressure	8 bar	
Maximum Temperature	40°C	
Minimum Temperature	1 °C	
Connection	3/4" BSP (3/4 NPT available)	
Cartridge	WC-CM H000611	
With Whale Orca 12V Pump	WMSFP H020978	



Wavestream System 1 Bilge Filter




Ref: WSS1 - Part No. H000596		
Flow Rate	1 - 40 litres per minute	
Maximum Pressure	6.2 bar	
Maximum Temperature	40°C	
Minimum Temperature	1 °C	
Connection	3/4" BSP	
Cartridge	WS-C1 H000597	
With Whale Orca 12V Pump	WSS1FP H020982	



Wavestream System 2 Bilge Filter




Ref: WSS2 - Part No. H000601		
Flow Rate	1 - 265 litres per minute	
Maximum Pressure	6.8 bar	
Maximum Temperature	37°C	
Minimum Temperature	1 °C	
Connection	11/2" BSP	
Cartridge	WS-C2 H000602	
With Whale Orca 12V Pump	WSS2FP H020983	



Wavestream System 3 Bilge Filter




Ref: WSS3 - Part No. H007262		
Flow Rate	1 - 265 litres per minute	
Maximum Pressure	6.2 bar	
Maximum Temperature	37°C	
Minimum Temperature	1 °C	
Connection	11/2" BSP	
Cartridge	WS-C3 H000608	
With Whale Orca 12V Pump	WSS3FP H020985	

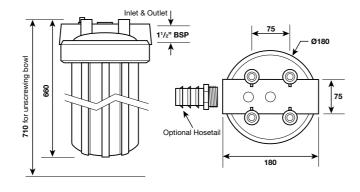

Wavestream MiniBOSS IMO Bilge Filter System



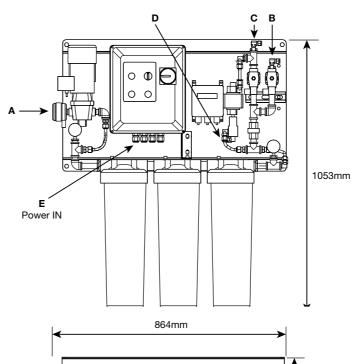

MPEC 107(49) Certified bilge filter system giving effective control and prevention of oily bilge water discharge using Wavestream System 3 filters.

- MiniBOSS from Recovered Energy Inc., with Wavestream removes trace oils to less than 5 ppm, keeping within the IMO required 15 or 5 ppm levels
- IMO Certified Oil in Water Monitor with 18 month data logging, 2 models available
- Wave MiniBOSS 24V dc maximum flow rate 0.50m³/hr
- Wave MiniBOSS 110V ac, 240V ac maximum flow rate 0.50m³/hr
- Compact, light and easy to maintain with Wavestream high capacity cartridges

Wavebrite Waste Water Filter System

Wavebrite discharge meets EU Council Directive concerning waste water treatment (91/271/EEC).

- Wavebrite has five main components with four stage waste water filtration; main Wavebrite module, pre-filters, pump, pump strainer and control
- Pump with automatic control, no holding tanks or pump out required
- The components are modular and can be located separately, connected by flexible hose for ease of installation
- Basic models have 15I/min maximum flow rate with an option to increase available on request

Wavebrite SMART

Marine grey water filtration unit that is selfmonitoring and gives a clear indication of how grey water onboard is being responsibly processed with due care for the environment.

Information such as daily volume processed, accumulative volume, status of the various filters within the unit is all displayed on a screen with audio and visual alarms, the screen can also be remote from the unit.

Grey water is discharged real time which negates the need for grey water holding tanks which significantly reduces the boat weight.

The unit is compact, has its own pump within a sound and vibration suppressed enclosure.

Simple to install and maintain with a high capacity of 20,000 litres between filter cartridge changes, this innovative product is based on the proven Wavebrite filter unit already installed to many commercial and leisure boats across the world.

Dimensions:

Length 670mm, Height 355mm + AV Mounts, Width 360mm

Overboard discharge meets the EU Waste Water Directive.



WBS / WBLite




WBSMART




		Wavebrite System	
Reference	Part No.	Description	
WBS	H020996	Wavebrite System 12 / 24V dc - complete with pump, filters, gauges, control pump, fittings and pipe	
WBLite	H020997	Wavebrite Lite System 12 / 24V dc - complete as WBS for smaller boats	
WB2010	H019882	Wavebrite 2010 System 12 / 24V dc - complete for boats with multiple showers and basins	
WB2020	H020998	Vavebrite 2020 System 12 / 24V dc - complete as 2010 but larger capacity	
WB100	H020999	Wavebrite 100 System 12 / 24V dc or ac - complete for S/Y and boats requiring larger capacity, processes up to 100 cubic metres	
WB300	H02100	Wavebrite 100 System 12 / 24V dc or ac - complete for S/Y and boats requiring larger capacity, processes up to 300 cubic metres	


Wavebrite WBS Schematic

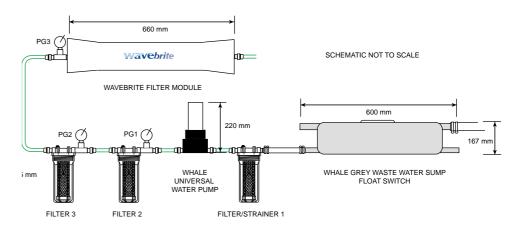

Wavebrite WB2010 Schematic

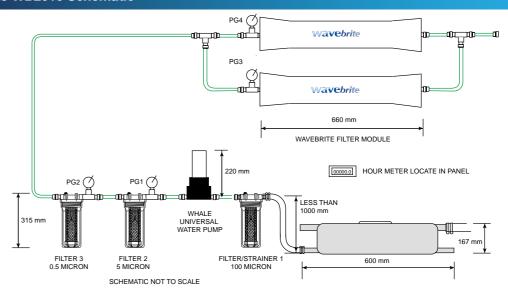

Wavebrite WB300 Schematic

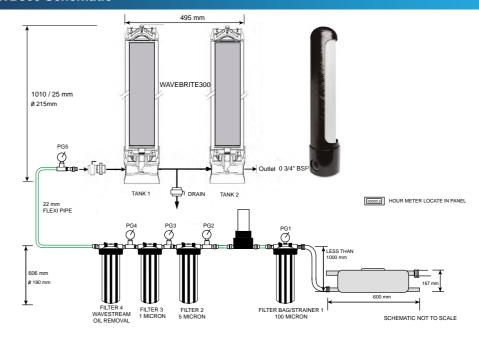


Wavebrite Grease Trap


The Wavebrite Grease Trap is a useful addition to any Wavebrite system when processing galley waste water. It removes food waste, fat and grease which helps prevent solids forming in the system and extends the life of the Wavebrite module and filter cartridges.

- Simply installed in the drain from the galley sink or dishwasher
- Removes food debris, fat and grease retaining them in a food basket and grease trap reservoir
- Extends the life of the Wavebrite module and filter cartridges and improves pump efficiency
- The fat / grease level is visible through the inspection glass which indicates when the trap needs servicing
- Two sizes are available 1.75 and 4.50 litre

Wavebrite Grease Trap		
Reference	Part No.	Description
WBGT/1.75	H021005	Wavebrite Grease Trap 1.75l capacity
WBGT/4.5	H021006	Wavebrite Grease Trap 4.50l capacity





Wavebrite 1.75I Dimensions



MAX. WATER LEVEL

OUTLET





BASE PLATE

Flostream HiFlo Drinking Water Filters

The Flostream HiFlo 10 and HiFlo 10 Micro are designed for higher flow rate drinking/ wash applications providing premier quality, safe healthy water and eliminating the need for plastic water bottles.

- WRAS and NSF Certified components and filter cartridge
- Chlorine, taste and odour reduction
- Limescale inhibition and reduces heavy metals
- Bacteriostatic control to inhibit microbial growth in the water system
- Filter body easily removed with spanner provided. Replace cartridge after 6 months or if it has passed stated capacity of 6000 litres or 3000 litres for HiFlo 10 Micro.
- Pressure range 0.7 8 bar. Temperature range 4 45°C. Recommended maximum flow rate 10 litres per minute
- Simple installation with 15mm push-fits for flexi-pipe connectors or standard ³/₄" BSP

Flostream HiFlo 10		
Reference	Part No.	Description
FLOHF10BH	H025656	Flostream HiFlo housing with 3/4" BSP threaded connections, cartridge and mounting bracket.
FLOHF10-15BH	H025657	Flostream HiFlo housing with 15mm push-fit connections, cartridge and mounting bracket.
FLOHF10C	H021012	Flostream HiFlo replacement cartridge, capacity 6,000 litres
FLOMHF10	H024487	Flostream 10 Micro housing with 3/4" BSP threaded connections, cartridge and mounting bracket.
FLOMHF10-15	H024476	Flostream 10 Micro housing with 15mm push-fit connections, cartridge and mounting bracket.
FLOMHF10C	H025900	Flostream HiFlo 10 Micro replacement cartridge, capacity 3,000 litres



FLOHF10

HiFlo 10 Micro Dimensions

Inlet & Outlet

| August | Aug

Flostream Drinking Water Cartridge & Head

Designed to provide premium quality drinking water and for all food service applications. Available in two sizes giving a practical, cost effective point of use solution for safe, healthy water.

- NSF 42 & 53 Certified to meet health and aesthetic standards
- Chlorine, taste and odour reduction
- Limescale and KDF inhibition, antibacterial and reduces heavy metals
- Cyst reduction, removes contaminants that cause health issues
- Bacteriostatic control to inhibit microbial growth in the water system
- Cartridge easy connect / release with a quarter turn
- Pressure range 0.7 8.5 bar. Temperature range 2 - 38°C. Recommended flow rate 1.9l/min
- Simple installation with push-fit connectors for standard 10mm flixi-pipe. Install in vertical position with cartridge hanging down for easy replacement

Flostream		
Reference	Part No.	Description
FLOW2	H019878	Flostream Cartridge 2 replacement cartridge,length plus head 264mm. Capacity 3,800l
FLOW4	H021009	Flostream Cartridge 4 replacement cartridge, length plus head 372mm. Capacity 7,600 litres
FLOWPHD	H021008	Flostream Universal Head with 10mm quick connect ports
FLOWPHD15	H019877	Flowstream Universal Head with 15mm quick connect ports





Flostream Dock Water Filter, Cartridge & Hose

The Flostream Dock Water Filter is installed in the water supply to pre-filter water when filling onboard tanks. Removing most impurities in three stages, further purification at the point of use can then be applied if required.

- Removes particulates and chlorine improving the taste and smell as a pre-filter
- STAGE 1 Removes large particulates
- STAGE 2 Removes sediments down to one micron
- STAGE 3 Effectively reduces Chlorine, smell and odours, improving taste and colour with bacteriostatic control
- Maximum pressure 6.20 bar. Temperature range 1
 45°C. Recommended maximum flow rate 20l/min
- Simple installation, hose supplied with ³/₄"
 BSP connectors. The filter is installed between the supply tap and the onboard tanks

Note: Bracket is not included.

Flostream HiFlo 10		
Reference	Part No.	Description
FDF	H021023	Flostream dock water filter and housing, cartridge, connections and supply hose
FDF-C1	H021024	Flostream dock water filter replacement cartridge, length plus head 315mm. Capacity 20,000 litres
WSS1SSMB	H024439	Flostream Wavestream1/Dock Filter Mounting Bracket



Waveair Holding Tank Vent Filter

Eliminates foul smells in and around your boat from holding tank vents. Waveair is simply installed in the vent line after the tank and before the outlet. Removes the organic compounds that cause bad odours

- Waveair uses a highly effective filter media, available in two sizes, 430mm and 200mm long, both for 16,19 and 25mm hose connections
- Single module supplied with brackets and connections
- Easy filter replacement. Simply remove the complete filter after one year, retaining bracket and connections and insert replacement filter
- Not suitable for treated sewage with significant amounts of chemicals, chlorine or other oxidising agents within the tank

Waveair		
Reference	Part No.	Description
WAM16	H021025	Waveair Micro tank vent filter - 16mm
WAM19	H021026	Waveair Micro tank vent filter - 19mm
WAM25	H021027	Waveair Micro tank vent filter - 25mm
WAMC	H021028	Waveair Micro replacement filter - 16 & 19mm
WAMC25	H021030	Waveair Micro replacement filter - 25mm
WA16	H021013	Waveair tank vent filter - 16mm
WA19	H021014	Waveair tank vent filter - 19mm
WA25	H021015	Waveair tank vent filter - 25mm
WAC	H021016	Waveair replacement filter - 16 & 19mm
WAC25	H021031	Waveair replacement filter - 25mm



PROstream Watermaker Duo Cartridge

Unique pre-RO watermaker protection removes both sediment and trace oils. Combined string wound or melt blown cartridge with Wavestream oil removal technology. The PROstream cartridge replaces an existing prefilter and offers additional oil protection phase

- Protects main RO by efficient oil removal with high dirt holding properties
- Wide range of sizes, micron ratings and end cap configurations available
- · Consistent filtration over the life of the cartridge
- Marine, domestic and industrial applications

		PROstream
Reference	Part No.	Description
PRO-C1	H021017	PROstream wound outer 5 micron oil removal cartridge fits standard 10" housings
PRO-C1 / 20	H021018	PROstream wound outer 5 micron oil removal cartridge fits standard 20" housings
PRO-C2	H021019	PROstream wound outer 5 micron oil removal cartridge fits large diameter Big Blue 10" housings
PRO-C2 / 20	H021020	PROstream wound outer 5 micron oil removal cartridge fits large diameter Big Blue 20" housings




Waveshine Inline Wash & Rinse System

Waveshine is a wash down filter system that removes the minerals from water that causes spotting and smears when washing and rinsing your boat. When also used to filter water going onboard it removes hardness softening the water for regular use, protecting appliances, taps, sinks, showers, pumps and systems.

- Waveshine 4250 and 8500 use a highly effective resin media with 4250 and 8500 litre capacities, depending on water hardness
- Replacement salt cartridges and hardness test kits available
- Waveshine can be used free standing on the dock or installed onboard. Saddle clamps work as a stand on the dock or as installation brackets
- Softened water dramatically reduces scaling in appliances, pumps and systems and improves the effectiveness of soaps and detergents reducing the impact on the environment

Waveshine		
Reference	Part No.	Description
WSN4250	H022157	Waveshine system with 4250 litre capacity, regeneration filter, salt cartridge, hose and hardness kit
WSN8500	H021021	Waveshine system with 8500 litre capacity, regeneration filter, salt cartridge, hose and hardness kit
WSN-CS1	H021022	Waveshine 4250 & 8500 regeneration cartridge
WSN-HK	H021029	Waveshine hardness test kit

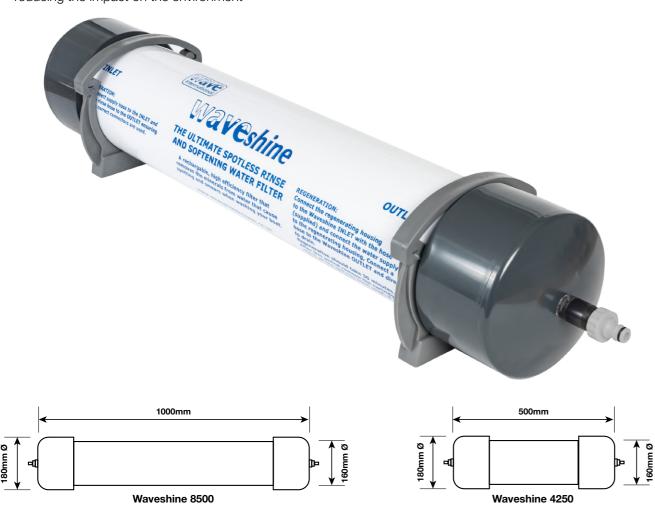

Waveshine Clear Cartridge Wash & Rinse System

The Waveshine Clear range of wash down filter systems remove the minerals from water that cause spotting and smears when washing and rinsing your boat, leaving a clear, shiny finish.

Three models available, Clear 300, 1000 and 2000, reflecting the approximate capacity of the cartridge in the filter in litres. A replaceable cartridge in each filter system removes and retains the minerals from the rinse water. **Note:** Must not be used as drinking water filter.


 Waveshine Clear Systems use a highly effective resin media with an approximate 300, 1000 and 2000 litre capacity, depending on model and water hardness

- The cartridges are non-regenerable and replacements are available
- Waveshine Clear can be used free standing on the deck or installed onboard. Stainless brackets are supplied for internal fitting
- Maximum performance is ensured with no need for wipe or leather off after rinsing reducing the overall time for wash down leaving a clear, shiny finish all over the vessel

Waveshine Clear 300




Ref: WSNC300 - H023020		
Flow Rate	1 - 40 litres per minute	
Maximum Pressure	6.2 bar	
Maximum Temperature	40°C	
Minimum Temperature	1 °C	
Connection	3/4" BSP	
Cartridge	H023023	



Waveshine Clear 1000




Ref: WSN1000 - H023021	
Flow Rate	1 - 265 litres per minute
Maximum Pressure	6.8 bar
Maximum Temperature	37°C
Minimum Temperature	1 °C
Connection	11/2" BSP
Cartridge	H023024



Waveshine Clear 2000



Ref: WSN1000 - H023022	
Flow Rate	1 - 265 litres per minute
Maximum Pressure	6.2 bar
Maximum Temperature	37°C
Minimum Temperature	1 °C
Connection	11/2" BSP
Cartridge	H023025



Halyard Service Support

To ensure reliable operation and long service life of onboard equipment, it is critical that regular inspection and maintenance is carried out. To support this Halyard is able to provide its customers with the high level of support required with our service operation providing both field based and workshop support.

This service is available both in the UK and overseas from our own support engineers and also through our network of distributors and dealers.

We offer: Health Checks, Maintenance, Repair, Overhaul, Equipment Replacement, and Sea trial services for all Halyard supplied products but also for other selected onboard equipment. Service support includes but is not limited to the following:

- Exhaust systems & components
- Steelhead cranes
- Freeman hatches & doors
- Aquadrive antivibration systems
- Seatorque shaft systems
- Conventional shaft systems
- Sterndrives
- Steering gear
- Diesel engines & generators

If you have the requirement for any of the above services, please contact us to discuss your detailed requirements.



Contacts:

service@halyard.eu.com

Landline: +44(0)1722 713717 Mobile: +44(0)7774 250765







Halyard Network

Distributors & Dealers

United Kingdom:

Argo Yachting Limited Saxon Wharf, Lower York St,

Southampton SO14 5QF Tel:+44 (0) 2381 103 160 www.argoyachting.com southampton@argoyachting.com

AR Peachment Ltd

Riverside Estate, Brundall Norwich NR13 5PL Tel: +44 (0) 1603 714077 www.peachment.co.uk

Darthaven Marina Ltd

Brixham Road, Kingswear Dartmouth TQ6 0SG Tel: +44 (0) 1803 752242 www.darthaven.co.uk

D B Marine International

Cookham Bridge, Cookham on Thames Maidenhead SL6 9SN Tel: +44 (0) 1628 526032 www.dbmarine.co.uk

Mike Wills Marine Services

Cobb's Quay Marina, Hamworthy Poole, Dorset BH15 4EL Tel:+44 (0) 1202 679 756 www.mikewillsmarine.co.uk mikewills2@aol.com

Mylor Yacht Harbour

Churchtown, Falmouth TR11 5UF Tel: +44 (0) 1326 372121 www.mylor.com

SAL Marine Limited

www.salmarine.com supportteam@salmarine.com Tel: +44(0) 1590 679588

Seapower Marine Ltd

Woolverstone Marina Woolverstone, Ipswich IP9 1AS Tel: +44 (0) 1473 780 090 www.seapowermarine.com

TW Marine Ltd

The Marina Station Road, Furness Vale High Peak SK23 7QA Tel: +44 (0) 1663 745757 www.twmarine.co.uk

Vasi Southern Ltd

Hamble Point Marina, School Lane Southampton SO31 4NB Tel: +44 (0) 1489 876484 www.vasi-southern.com info@vasi-southern.com

Ireland:

CH Marine Ltd

Nautic House, Marsh Road Skibbereen, Co. Cork Tel: +353 (0) 28 23190 www.chmarine.com

South Shore Marine & Diesel

27 Annaloise Road, Kinnego Marina, Lurgan, Co. Armagh, Northern Ireland Tel: +44 (0) 283 8341010 www.southshoremarine.co.uk

Croatia:

LOA doo

Juzna magistrala 17. 22000 Sibenik, Croatia Phone: +385 91 314 3006 Email: info@loa.hr

Finland:

Oy Unilink AB

Vattuniemenkatu 15 00210 Helsinki Tel: +358 (0) 968 66 170 www.unilink.fi

France:

Seimi

74 Rue Amiral Troude CS 41809 29218 Brest Cedex 2 Tel: +33 (0) 298 461102 www.seimi.com

Greece:

Motocraft

48 Alimou Avenue 17455 Alimos, Athens Tel: +30 (0) 210 988 288 www.motocraft.gr

Iceland:

Vinnuvélar og Ásafl ehf

Völuteigur 4 270 Mosfellsbær, Iceland Tel: +354 496-4400 www.vinnuvelarehf.is

Italy:

Uflex Srl

via Milite Ignoto 8A 16012 Bussalla GE Tel: +39 (0) 10 9620213 www.ultraflexgroup.com

Netherlands:

Technautic BV

Industrieweg 35 1521 NE Wormerveer Tel: +31 (0) 75 647 4545 www.technautic.nl

Norway:

Progress Ingeniorfirma AS

0884 Oslo Tel: +47 (0) 220 27900 www.progressing.no

Poland:

Marine Works

Ul. Atney 10 80-299, Gdansk Tel: +44 (0) 48583244930 www.marineworks.eu/pl

Spain:

Central De Transmisones Y MANDOS S.L

C/Newton, 1 - Edificio E3 - Nave 6 Pol. Ind NEINOR 28914 Leganes, Madrid Tel: +34 (0) 916 653 330

Argo Yachting Palma

Calle Alacant, 38 Poligono Son Bugadellas Santa Ponsa 07180 Tel: +34 (0) 971 695 437 www.argovachting.com/ mallorca@argoyachting.com

South Africa:

Seascape Marine Services (PTY) Ltd

124 Service Road Marine Drive, Paarden Eiland Cape Town Tel: +27 83 273 4704 www.seascapemarine.co.za

Sweden:

Trans Auto

Förrådsvägen 6. 151 48 Södertälie Sweden www.transauto.se

Thailand:

Boat Lagoon Yachting

22/1, Moo 2 Thepkrasattri Road Koh Kaew, Muang Phuket Thailand 83000 Tel: +66 7623 9739 www.boatlagoonyachting.com enquiries@boatlagoonyachting.com

Turkey:

Navantec Denizcilik İçmeler Mah.

Yılmaz Sk. No:4/1 D:5 Tuzla İstanbul Turkey Tel: +90 (0) 216 392 4454

Agents

Netherlands & Germany - Projects >24m:

AP Management Hugo van de Wetering

E-mail: info@apmanagement.nl Tel: +31 612992026

UAE:

Blazer Marine Trading LLC PO Box 36834

E-mail: blazemarine@eim.ae Tel: +971 (04)3242 054/(050)5036 720 Fax: +971 (04) 3244 309 blazermarine@eim.ae

For all other territories please contact Halyard directly



Halyard (M&I) Limited 86 Cobham Road Ferndown Industrial Estate Wimborne BH21 7PQ

technical@halyard.eu.com service@halyard.eu.com www.halyard.eu.com +44 (0) 1722 710 922

Pleasure Craft

Commercial

Superyacht

Halyard (M&I) Ltd. makes no representations or warranties with respect to the contents or use of this manual and specifically disclaims any express or implied warranties of merchantability or fitness for any particular purpose. Further, Halyard (M&I) Ltd. reserve the right to revise this publication and make changes to its content at any time, without obligation to notify any person or entity of such revisions or changes. Further, Halyard (M&I) Ltd., reserve the right to make changes and all parts of Halyard products at any time, without obligation to notify any person or entity of such changes.

Nov 2024 HMI 211/11